



SIBE

*Proceeding of International Conference on
Sustainable Infrastructure and Built Environment*

[Description](#) [Keynote Speaker SIBE 2022](#) [Committees](#) [Program](#) [For Author/Participants](#) [Student Competition](#)
[Sponsorship](#) [Publications of SIBE 2022](#) [Archives](#) [Contact](#)

Current Issue

Vol. 4(2021): Volume 4 Year 2021

ISSN 2964-5670 (ONLINE)

This Proceeding of International Conference on Sustainable Infrastructure and Built Environment, contains 56 papers. These papers are presented in The Fourth International Conference on Sustainable Infrastructure and Built Environment, held by Faculty of Civil and Environmental Engineering, Institut Teknologi Bandung on March 8-9, 2022. The conference is a quadrennial event (held once in four years time), The previous conference held in 2009 (First SIBE), 2013 (2nd SIBE), 2017 (3rd SIBE), and current issue is for the Fourth SIBE, which should be performed in 2021, however due to Covid-19 issue, the Fourth SIBE was postponed and then held in March 2022. However the ISSN for the fourth volume is made as per 2021 as regulated by Indonesia ISSN National Centre under BRIN, since this is a quadrennial event. The upcoming 5th SIBE will be held in 2025 by default.

ISSN 2964-5670 (ONLINE)



PROCEEDINGS OF International Conference on Sustainable Infrastructure and Built Environment

"Challenges on Sustainable and Resilient Infrastructure and
Built Environment"

Volume 4, 2021

Bandung-Indonesia, March 8th – 9th, 2022



Full Issue

Articles

Determination of Reflected Temperature in Active Thermography Measurements for Corrosion Quantification of Reinforced Concrete Elements	
Suyadi K, Herlien D Setio, Adang S, Ediansjah Z	1-8
Behavior and Design of Reinforced Concrete Walking Columns	
H Sutejo, Y C Ou	9-18
Concept Analysis of Earned Value at Construction Implementation Time (Case Study of Package 4 Development Project – APSLC, TILC, DLC, and FRC Buildings Gajah Mada University Yogyakarta)	
Novi Andhi Setyo Purwono, Khofifah Adzani Mubarak	19-31
Water saving planning in Menara Cibinong Apartment Tower D (Cendana)	
Tiara Anantika, Eka Wardhani and Nico Halomoan	32-37
Evaluation of Technical Criteria for Construction Technology Implementation of Madiun Train Station Based on Minimum Service Standards, Facilities, and Accessibility	
Hana Wardani Puruhita, Wahyu Tamtomo Adi, Sachiko Mawaddah Lestari	38-49
Simple Prototype on Fixed Bed Reactor (FBR) Based on Used Plastic with Active Suspension Solution Starter in Domestic Wastewater Treatment	
W.B. Suyasa, G.A.K.S.Pancadewi and G.A.W.Sudiartha	50-58
Systematic Literature Review for Lean Construction Method Current Trends and Issues	
G Huda and M A Berawi	59-66
The Study of Water Lettuce (<i>Pistia Stratiotes</i> L.) Application in Reducing Cod Levels of Tofu Wastewater Using Batch System Phytoremediation	
Nurpita Sinurat, Temmy Wikaningrum	67-72
Sedimentation Analysis in Front of A Submerged Rubble-Mound Breakwater due to Daily and Extreme Waves Simulations	
O C Pattipawae, T O Sihombing, H J Dani, T H Pelawi and H S Sihotang	73-82
Is Rainwater Harvesting the Perfect Solution for Sawagumu Village – West Papua?	
Nur Yuni Sujaryanti, Iwan Juwana	83-94
Health Risk Assessment and Flood Hazards in the Context of Strategic Environmental Assessment (SEA) in West Java – A Spatial Analysis	
K N Alihta, A Nastiti, B S Muntalif, A D Sutadian and E J Sundana	95-106
Estimating Sedimentation Trend of the Wonorejo Reservoir and Dam to sustain the Reservoir's Useful Life	
N A Teguh, N F Margini, M B Ansori and U Lasminto	107-116
Analysis of the Influence of Reservoirs on Effort Jragung River Flood Reduction	
Wahyu Prasetyo, Risdiana Cholifatul Afifah, Didit Puji Riyanto, Pranu Arisanto	117-127
Analysis of the Impact of Normalization on Downstream Conditions in the Bringin River Semarang City	
Ferdinand Agusta, Indratmo Soekarno, Agus Suprpto Kusmulyono	128-139
Evaluation Level of Accessibility on Malioboro Pedestrian Way for People with Disabilities	
Kurnia Nindya Nabila, Nursyamsu Hidayat	140-149

Study the Impact of Sediment Rate on River Morphology Changes and Floods in the Sadar River, Mojokerto Regency	
Nora Permatasari, Dhemi Harlan, and Edy Anto Soentoro	150-162
Covid-19 Impact Evaluation and Time & Cost Mitigation Strategy for Oil & Gas EPCI Project	
M P B Arisman, M A Berawi and M Sari	163-169
Experimental Study of Wave Transmission in Slope Crest Floating Breakwater	
S Rahman,D Paroka, A H Muhammad, C Paotonan, T P Putra, and A Kurniawan	170-175
Study of the Effectiveness of Bekasi Weir Gate Opening to Control Bekasi River Morphology	
A Pamungkas, J Nugroho, A Santoso, A R Wibowo, E O Nugroho	176-188
Application of Value Engineering in Basin (Embung) Construction : A Case Study in ITB Cirebon	
Fitrah, Allan; Yudha Oktano, Luthfi; Gayatri K. Pradoto, Rani	189-196
Study of Flood Control and Morphology of the Sario River in Manado City	
Davidson Rofiano Lombogia, Dantje K Natakusumah, Slamet Lestrari	197-210
Vacuum Preloading of Soft Clays on the Sumatra Toll Road in Indonesia – Field Monitoring Records vs. Numerical Modelling Results	
Asrinia Desilia, Endra Susila, Andhika Sahadewa	211-219
The Relationship of Lighting Intensity with Eye Fatigue in Workers at Mekar Armada Jaya Inc. in 2021	
E F Ahmad, D E Putri, E C Putri	220-227
Numerical Prediction vs Measured Lateral Movements of An Unstable Slope Before and After Reinforcement by Two Rows of Bored Piles – A Case Study in Kalimantan Indonesia	
Fadlli As-Shidiqqy, Endra Susila, Andhika Sahadewa	228-235
Analysis of the Five Pillars of Irrigation Modernization with the MASSCOTE Method in the Macan Irrigation Area.	
Ernawati, Indratmo Soekarno, Joko Siswanto, and Yadi Suryadi	236-246
A study on Flood Management With an Integrated Floodgate Operation Pattern at Pepe River in the City of Surakarta	
Khoiron, Dhemi Harlan, Edy Anto Soentoro dan Widyaningias	247-257
Study of Flood Effect as the Impact of Gelis River Morphological Changes in Kudus Regencies	
Mahelga Levina Amran, Dhemi Harlan, Agus Suprpto Kusmulyono	258-266
Sedimentation Impact on Capacity and Morphology Changes on Bendung River of Palembang City	
Prima, P A , Nugroho, J , Hatmoko, W	267-276
Potential Sedimentation in the Operation Ciliwung Diversion Tunnel	
I.F.R. Silalahi, I. Soekarno, J. Nugroho, E. O. Nugroho, B. Heri	277-291
Study of the Effectiveness of Upgrading and Operations & Maintenance (O & M) Rinjani Checkdam on Flood Early Warning System and Lead Time on the Batu Merah River in Ambon City	
Putit Tri Bunai, Hadi Kardhana, Edy Anto Soentoro	292-302
Study of Progo River Morphology and Sedimentation of Intake Kamijoro Weir Bantul Regency, Special District of Yogyakarta	
M Uzaer, Sri Legowo W D and Isdiyiana	303-315

POI River Sediment Control Post – Earthquake	
Elieser Palantik, Joko Nugroho, Arie S Moerwanto, Edy Anto Soentoro and Radia Zufikar	316-325
<hr/>	
The Impact of Upper Citarum Diversion Channels on Sediment Transport and River Morphology	
Pravira Rizki Suwarno, Sri Legowo Wignyo Darsono, Suardi Natasaputra	326-333
<hr/>	
The Effectiveness of Grease Trap, Carbon Active and Aerobic Biofilter Methods to Clean The Waste Water of The Canteen	
Hari Rudijanto I.W, Tri Cahyono	334-341
<hr/>	
Study of Hydraulic and Sediment of River Sunter in Flood Management	
Ajeng Padmasari, Indratmo Soekarno, Eka Nugroho Oktariyanto, Muhammad Farid, Bambang Heri	342-349
<hr/>	
Study of Capacity Improvement of Plangwot-Sedayu Lawas Floodway	
Khoirunisa Ulya Nur Utari, Arno Adi Kuntoro, Sri Hetty	350-358
<hr/>	
Mac-cormack Flux Corrected Transport Scheme for Simulation of Dam Break and Super Critical Flow in Curvilinear Coordinate System	
Bernardus S. Pasereng, Dantje K. Natakusumah, Eka Oktariyanto Nugroho, and Taufik A.G. Zahir	359-368
<hr/>	
Participatory-based Mapping as An Approach for Marine and Coastal Community in Protecting and Strengthening Their Aquatic Culture and Ecosystem	
Mutmainnah Adenan	369-375
<hr/>	
Assessment of the Potential Land Erosion and Actual Accumulated Sedimentation for Carrying Capacity in Bone River, Gorontalo	
D A Taruna ¹ , I Jaya, B Kosasih, M B Adityawan, and AA Kuntoro	376-386
<hr/>	
Heavy metals in groundwater surrounding industrial areas: a case study in Leuwigajah, Cimahi	
W Naily, H Hendarmawan, C Asdak, and S Sunardi	387-393
<hr/>	
The Effect of Staging Development Structural Flood Design on Sediment Transport Process Along Bringin River	
Ricky Pondaag, M. Cahyono, Hernawan Mahfudz, and Eka Oktariyanto Nugroho	394-405
<hr/>	
Study of Cisangkuy River Flood and Sedimentation	
Stefan Theophilus, Agung W H Soeharno, Yadi Suryadi and Eka O Nugroho	406-415
<hr/>	
Sedimentation Study In The Batu Merah River (Check Dam Rinjani) Ambon City	
Bayu Setiawan, Agung Wiyono Hadi Soeharno, Eka Oktariyanto Nugroho, Chandra Hassan	416-430
<hr/>	
Analysis of Sediment Transport on Ring Ngotok Canal's Morphological Changes	
Pipin Surahman, Sri Legowo Wignyo Darsono, Agus Santoso, Sri Hardini Suprapti, Ima Sholikhati	431-440
<hr/>	
Effect of Barito River on Drainage Performace in Dadahup Lowland Irrigation Area	
Dwi Yunita, Mohammad Farid, Setio Wasito, Parlinggoman Simanungkalit, Yadi Suryadi	441-450
<hr/>	
Study of Barito River Supply System on Dadahup Lowland Irrigation in Central Kalimantan Food Estate Area	
Meilani Magdalena, Mohammad Farid, Winskayati, Joko Nugroho, Parlinggoman Simanungkalit, Yadi Suryadi	451-460
<hr/>	
The Groundsill Effectiveness on the Sediment Distribution Along Cipamingkis River in Bogor Regency, West Java	
Tasya Asyantina, Hadi Kardhana, Eka Nugroho, Hernawan Mahfudz	461-468
<hr/>	
Study on Morphological Change due to Flood in the Tuntang River	

Wisnu Hadiwijaya, Agung Wiyono Hadi Soeharno, Eka Oktariyanto Nugroho, Isdiyana	469-480
Analysis of the Effect of Sediment Transport on River Bed Changes of Cengkareng Floodway	
Rezky Dwi Nur Cahyani, Muhammad Cahyono, Leo Eliasta, Arie Setiadi Moerwanto, Eka Oktariyanto Nugroho	481-490
Characterizing Ionic Species of PM _{2,5} Derived from Agricultural Biomass Burning on Paddy Commodity	
Aulia Fauziah Lu'ayi, Puji Lestari, Kania Dewi	491-496
The Planned of Behaviour (TPB) Theory Approach to the Participation of Farmers (P3A) and Local Governments in Participating of Agricultural Systems, Case Study : Jatiluhur East Tarum Main Canal, Subang Regency	
A W H Soeharno, T Andriana; A P Nugroho; E O Nugroho; A Mardiyono; H Rachmadyanto	497-515
Combination of VRP and Traffic Assignment to Determine the Location of Logistics Distribution Centers	
T Junaedi	516-527
Transport Benefit Assessment due to Increasing Capacity Transportation Infrastructure	
Maulana Andrian, Sjaffruddin Ade, and Bona Russ	528-538
Hydrological Water Balance Projection in Several Reservoir Catchment	
Sartika Rachmawati and Hadi Kardhana	539-549
Correlation between Rainfall, Flow Rate and Phosphate towards Coliform Bacteria in the Way Sekampung River, Lampung	
T K Nufutomo, AA Mufti, K Fitriani, M Fadillah	550-557
Study of Loji River Bed Change in Pekalongan City	
P Lutfitiana, R P Ramadhani, M Cahyono, E O Nugroho, Y E Kumala, and S Lestari	558-566

Sedimentation analysis in front of a submerged rubble-mound breakwater due to daily and extreme waves simulations

O C Pattipawaej¹, T O Sihombing¹, H J Dani¹, T H Pelawi¹ and H S Sihotang¹

¹Civil Engineering Department, Universitas Kristen Maranatha, Jl. Prof. drg. Suria Sumantri, MPH No. 65, Bandung 40164, Indonesia

Abstract. Understanding soil dynamics in coastal structure locality is significant to evaluate the performance of coastal structures and predict the changes in coastal dynamics caused by a specific structure. Changes in sea-level can cause soil dynamic response around a submerged rubble-mound breakwater. This study analysed the sedimentation that occurred in front of the submerged rubble-mound breakwater through laboratory tests. The submerged rubble-mound breakwater was carried out with a length of 750 cm using the main protective layer of Dolos with a scale of 1:10 and the core layer using Geotube. The wave simulation used daily and extreme waves. The sedimentation research area was in front of the rubble-mound breakwater with a length of 750 cm and a width of 200 cm. The observation points were determined by dividing the research area by 50 cm in the length direction and 50 cm in the width direction. All observation points in the sedimentation study area were analysed and determined points that experienced scouring/deposition due to daily and extreme waves. The results showed that the largest scour occurred in the outer side of study area facing the incident waves, both due to simulations of daily waves and extreme waves. Further research will review the effect of sedimentation on the stability of the submerged rubble-mound breakwater.

1. Introduction

Sediments around the coastline are easily dislocated due to the influence of tides, waves, and currents, which often cause erosion on the coast [1, 2]. There are several ways that can be done to protect the coastal, namely strengthening the coast or protecting the coastal area so that it can withstand damage by constructing several coastal structures [3, 4, 5]. The rubble-mound breakwater is a coastal protection structure whose position is parallel or approximately parallel to the shoreline with the aim of reducing incident waves [6]. The purpose of the rubble-mound breakwater is to reduce wave energy (forces) behind the structure, as well as to protect the harbour pool against wave disturbances [7, 8]. In addition, it also aims to prevent coastal erosion [9, 10]. The function of the rubble-mound breakwater is to protect the harbour water pond located behind it from wave attack, some of the energy of the wave absorber will be reflected, the reduced wave energy in the protected area will reduce the delivery of sediment in the area [11].

The most common approaches for modelling sediment transport that is induced by wave-structure interactions have been done using numerical models. The advance in numerical Reynolds-Averaged Navier-Stokes (RANS) modelling was used for modelling the wave-structure interactions [12]. The numerical study on the wave-induced current and morphology changes due to the complicated interaction between waves and a sandy beach with shore-parallel breakwaters was developed based on the SWASH wave model coupled with a sediment transport [13]. The study numerically investigated the nonlinear dynamic analysis of a submerged rubble-mound low-crested

breakwater constructed over a loosely deposited seabed foundation due to combined waves and currents [14]. However, there are certain aspects when developing a numerical model that needs to be studied in more detail such as the optimal boundary and the initial conditions for each numerical approach.

Experimentally, both fields and laboratory measurements focus on the structure foundation. Physical models of laboratory experiments face very severe problems with sediment and wave scale. In spite of the problems and issues that still arise in the experimental testing of the seabed response, several studies have investigated sediment transport and the scour around coastal structures. Fausset [15] compared the seabed response around rubble-mound breakwaters from field surveys to those obtained in an ocean test laboratory. On the other hand, Temel and Dogan [16] tested the time dependent investigation of the wave induced scour at the trunk section of a rubble mound breakwater.

In this study, physical models of laboratory tests were emphasized to examine the sedimentation that occurred in front of the submerged rubble-mound breakwater. The submerged rubble-mound breakwater was conducted with a length of 750 cm using dolos at the armor layer [17] and geotube (geotextile tube) at the core layer [18]. Dynamics change in sea level reflected the response of the water surface meteorological and oceanographics processes as well as tides and can be thought as periodic or episodic deviations about mean sea level. Sea level changes have an effect on the level at which wave actions occurs and may also lead to horizontal movements of water in tidal and other currents. The various reasons for sea level changes are sea level rise, i.e. increase or decrease on the amount or level of water in the ocean will create new water bodies and affect the existing landforms, and extreme events that can suddenly change (in short term) the water level in the near-shore environment and may remain permanently. The sea level rise and extreme events represent the daily and extreme waves simulations, respectively. The research area of sedimentation set in front of the rubble-mound breakwater with a length of 750 cm and a width of 200 cm. The observation points were decided by partitioning the research area of sedimentation by 50 cm in the length direction and 50 cm in the width direction. All observation points in the study area of sedimentation were examined and resolved points that are subjected to scouring/deposition due to daily waves and/or extreme waves simulation.

2. Methods

The model tests were carried out at the Laboratory of Balai Pantai, Ministry of Public Works and Public Housing of the Republic of Indonesia with a length scale of 1:10 (Froude scaling) compared to the typical prototype dimension. The wave basin is 30 m long, 10 m wide and 1.25 m deep. The model breakwater was located at the distance of 18 m from the wave generator. The regular wave generator has a length of 10 m, where the maximum wave height is 15 cm at a water depth of 50 cm and a wave period of 1.5-2.5 seconds. The wave basin configuration is shown in Figure 1.

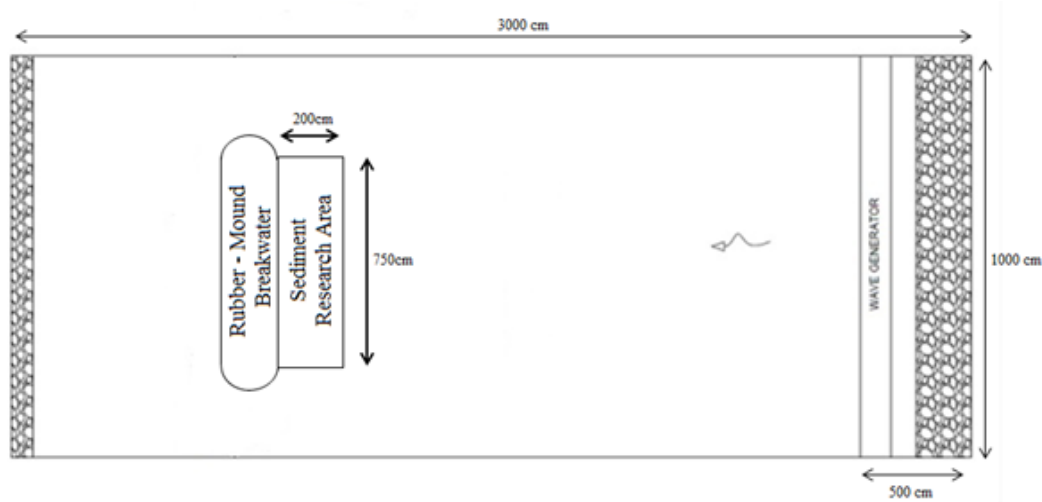


Figure 1. Wave basin configuration

Laboratory tests were focused on a submerged rubble-mound breakwater model using piles of natural stone, Geotube as the core layer and the artificial stone made of Dolos concrete as the armor layer in the direction of incident waves. The height of the rubble-mound breakwater is 42 cm. The side slope of rubble-mound breakwater facing the incident waves is 1:2.5 and the land slope of rubble-mound breakwater is 1:1.5. Figure 2 shows the process of setting up the rubble-mound breakwater model. The rubble-mound breakwater model can be seen in Figure 3.

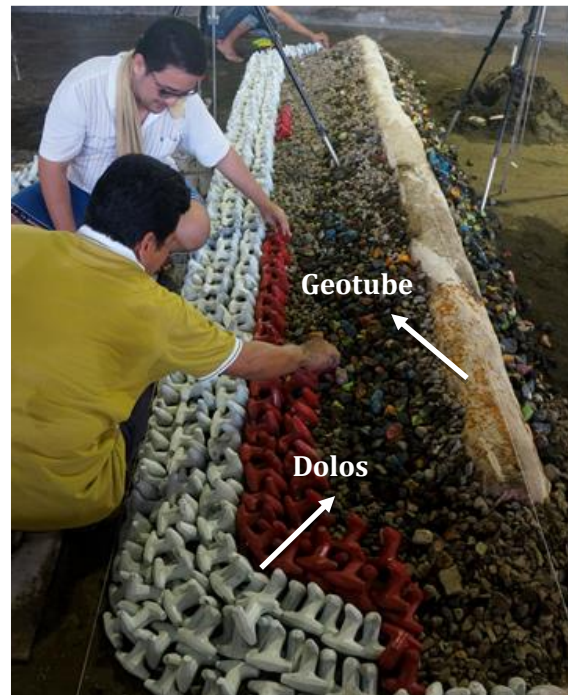


Figure 2. Process of establishing the rubble-mound breakwater model



Figure 3. Rubble-mound breakwater model

In the sedimentation test in front of the submerged rubble-mound breakwater due to daily waves simulation, the wave and water level modelling was divided into fifteen test sections. These test sections are considered the representative of the water level and wave conditions in nature as sea level rise, where tides and wave frequency changes occur; even though, each test section is only considered wave induced current. In this test, the water level was divided into five sections of 30 cm, 35 cm, 40 cm, 42 cm and 45 cm. Each water level was tested every 15 minutes (900 seconds) with three different

wave frequencies, namely 10 Hz, 12 Hz and 14 Hz, respectively. The wave height and wave period were measured using wave probe located in front of rubble-mound breakwater model. The parameters of daily waves can be seen in Table 1.

Table 1. Daily waves parameters

Water Level (cm)	Time (second)	Wave Frequency (Hz)	Wave Height (cm)	Wave Period (second)
30	900	10	3.2	2.50
	900	12	2.8	2.08
	900	14	4.8	1.79
35	900	10	2.7	2.50
	900	12	4.7	2.08
	900	14	8.2	1.79
40	900	10	10.5	1.69
	900	12	4.5	1.04
	900	14	8.6	2.44
42	900	10	7.2	2.50
	900	12	5.7	2.08
	900	14	7.2	1.75
45	900	10	6.0	2.50
	900	12	6.8	2.08
	900	14	9.1	1.79

In testing of the sediment in front of the submerged rubble-mound breakwater due to extreme waves, the water level used was 45 cm and the water level was tested for a frequency of 14 Hz as the highest wave height due to daily waves simulation. This test section described the extreme event of sea level changes. The test time was 225 minutes. The parameter of the extreme wave simulation is shown in Table 2.

Table 2. Extreme waves parameters

Water Level (cm)	Time (second)	Wave Frequency (Hz)	Wave Height (cm)	Wave Period (second)
45	13,500	14	9.1	1.79

An experimental study of sedimentation using sand with the observation area was located in front of the rubble-mound breakwater on the sloping side of the direction of the incident waves. The sedimentation research area was 750 cm x 200 cm. Figure 4 presents the sedimentation research area in x- and y-directions.

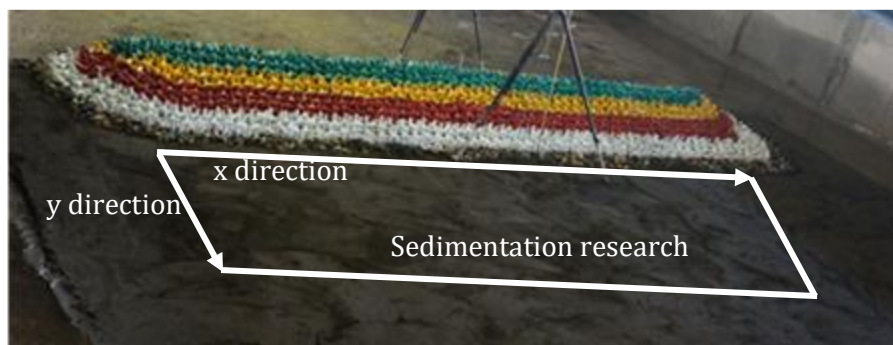


Figure 4. Sedimentation research area in x and y-directions

There were 60 research points in the horizontal direction and in the vertical direction as pointed in Figure 5. The observation points are partitioned by 50 cm in the length direction and 50 cm in the width direction. The thickness of the sand at the end of the sedimentation area in the direction of the incident waves was 2 cm and at in front of the rubble-mound breakwater was 4 cm as shown in Figure 6.

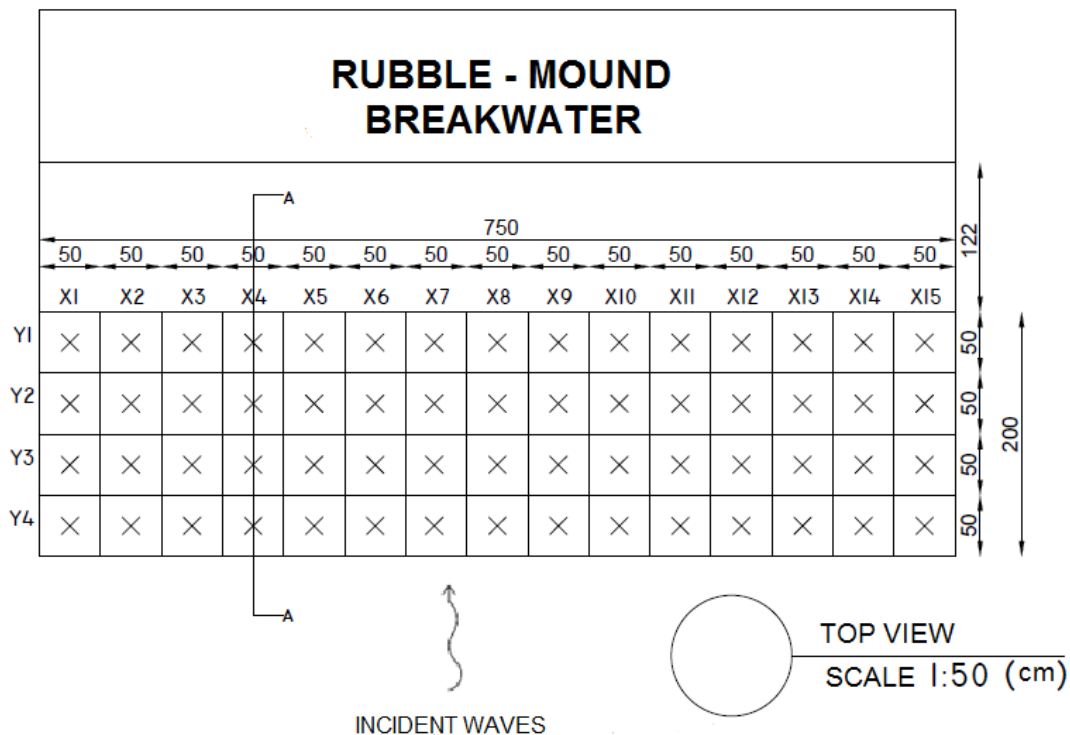


Figure 5. Sedimentation research points

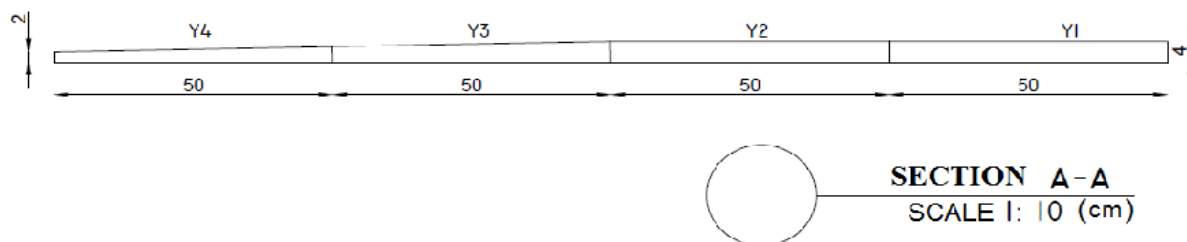


Figure 6. Side view of the sand thickness of the research area

3. Results and discussion

Data of the sediment thickness before and after being loaded with daily or extreme waves simulations were obtained from the experiments in the laboratory. The change in sediment thickness in front of the submerged rubble-mound breakwater were examined. These readings of sediment thicknesses were carried out using nails at 60 observation points in the sedimentation research area.

Based on data obtained from laboratory testing of sediment before and after being loaded with the daily waves, there was a reduction in sediment thickness at 60 points as shown in Figure 7. The change that occurred in the sediment thickness are very varied at each observation point with decreasing in sediment thickness by 0.05 cm – 0.35 cm at certain observation points.

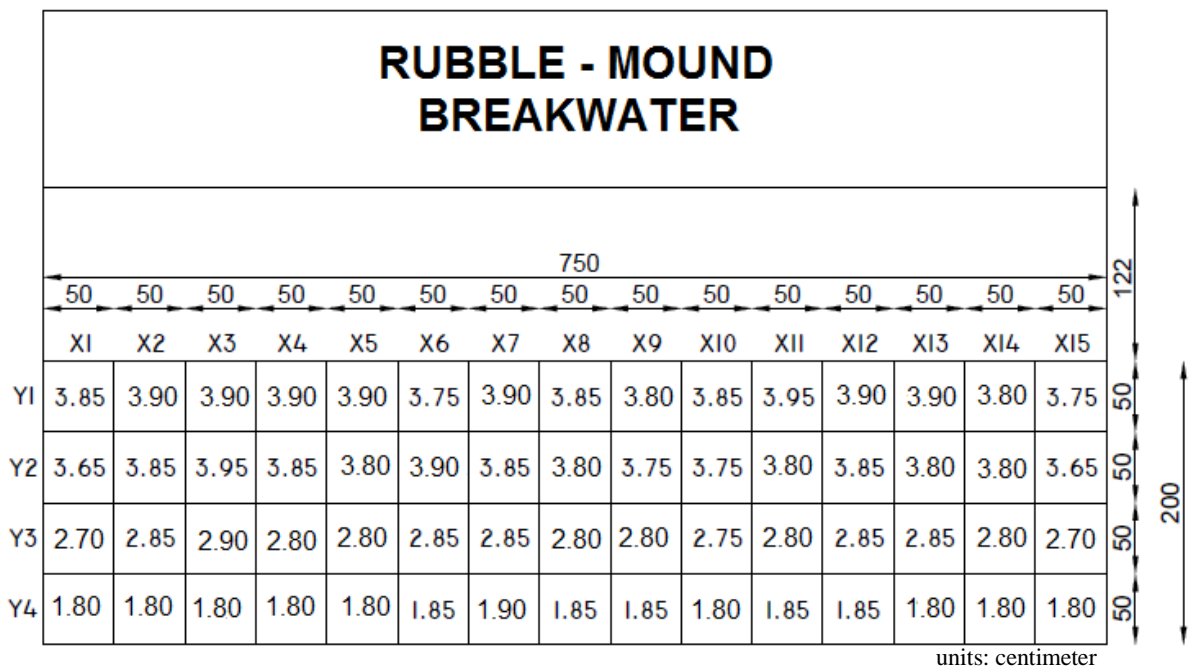


Figure 7. Changes in sediment thickness due to daily waves simulation

By comparing the sediment thickness changes before and after being loaded with daily waves simulation, the percentage of decreasing in sediment thickness at each observation point was determined as presented in Table 3. Figure 7 dan Table 3 indicate the observation points that experienced a decrease in sediment thickness.

Table 3. Percentage of decrease in sediment thickness at each point due to daily waves simulation

Points	Y1	Y2	Y3	Y4
X1	3.75	8.75	10.00	10.00
X2	2.50	3.75	5.00	10.00
X3	2.50	1.25	3.33	10.00
X4	2.50	3.75	6.67	10.00
X5	2.50	5.00	6.67	10.00
X6	6.25	2.50	5.00	7.50
X7	2.50	3.75	5.00	5.00
X8	3.75	5.00	6.67	7.50
X9	5.00	6.25	6.67	7.50
X10	3.75	6.25	8.33	10.00
X11	1.25	5.00	6.67	7.50
X12	2.50	3.75	5.00	7.50
X13	2.50	5.00	5.00	10.00
X14	5.00	5.00	6.67	10.00
X15	6.25	8.75	10.00	10.00

units: percentage (%)

The analysis of the data obtained was carried out after being loaded with extreme waves simulation in front of the submerged rubble-mound breakwater. It was found that there was a decrease in sediment thickness at 57 sediment review points. Three sediment thickness review points did not change. Changes that occurred caused reduction in sediment thickness by 0 – 0.30 cm at certain observation points. Figure 7 displays the changes in sediment thickness in front of the submerged rubble- mound breakwater due to extreme waves simulation.

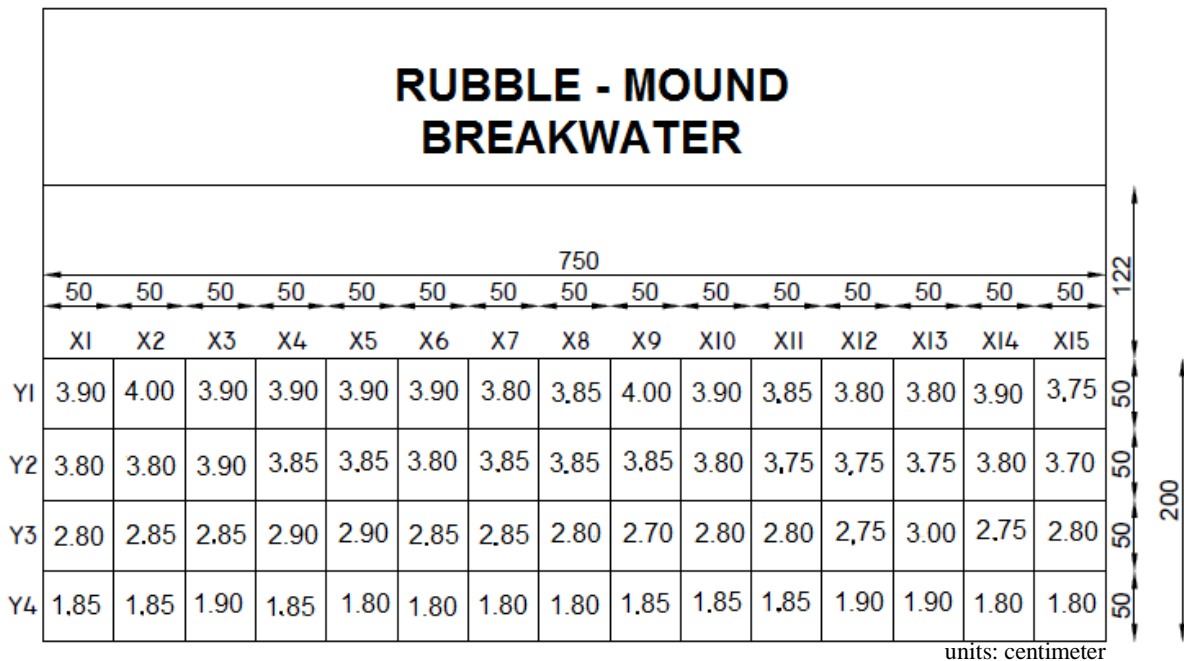


Figure 8. Changes in sediment thickness due to extreme waves simulation

The percentage of the decrease in sediment thickness at each point due to extreme wave simulation is presented in Table 4. The results show that both daily and extreme waves simulations decrease the sediment thickness the most at the outer side of the study area facing in the incident waves. The decrease in sediment thickness due to daily waves simulation is higher than due to extreme waves simulation.

Table 4. Percentage of reduce in sediment at each point due to extreme waves simulation

Points	Y1	Y2	Y3	Y4
X1	2.50	5.00	6.67	7.50
X2	0.00	5.00	5.00	7.50
X3	2.50	2.50	5.00	7.50
X4	2.50	3.75	3.33	5.00
X5	2.50	3.75	3.33	7.50
X6	2.50	5.00	5.00	10.00
X7	5.00	3.75	5.00	10.00
X8	3.75	3.75	6.67	10.00
X9	0.00	3.75	10.00	7.50
X10	2.50	5.00	6.67	7.50
X11	3.75	6.25	6.67	7.50
X12	5.00	6.25	8.33	5.00
X13	5.00	6.25	0.00	5.00
X14	2.50	5.00	8.33	10.00
X15	6.25	7.50	6.67	10.00

units: percentage (%)

The data obtained from the laboratory test contain numeric XY sediment research area coordinate and Z values contain the sediment thickness. The irregularly spaced XYZ data interpolate into regularly spaced grid using Surfer software as a grid-based mapping program. The grid from the results of changing in sediment thickness was used to describe the condition of the sediment in front of

the submerged rubble-mound breakwater after being loaded by daily and extreme waves simulations. The grid was also used to produce contour and 3D surface that best represents data [19].

The results from the Surfer describe the changing in sediment thickness at each observation point. Figure 9 presents the contour of sediment in front of the submerged rubble-mound breakwater using Surfer after loaded with daily and extreme waves simulations. Based on the contour images shown in Figure 9, the contour of sediment thickness changes at every observation point, where each observation point experiences the decreasing in sediment thickness. The outer sides of the study area facing the incident waves significantly reduce in sediment thickness.

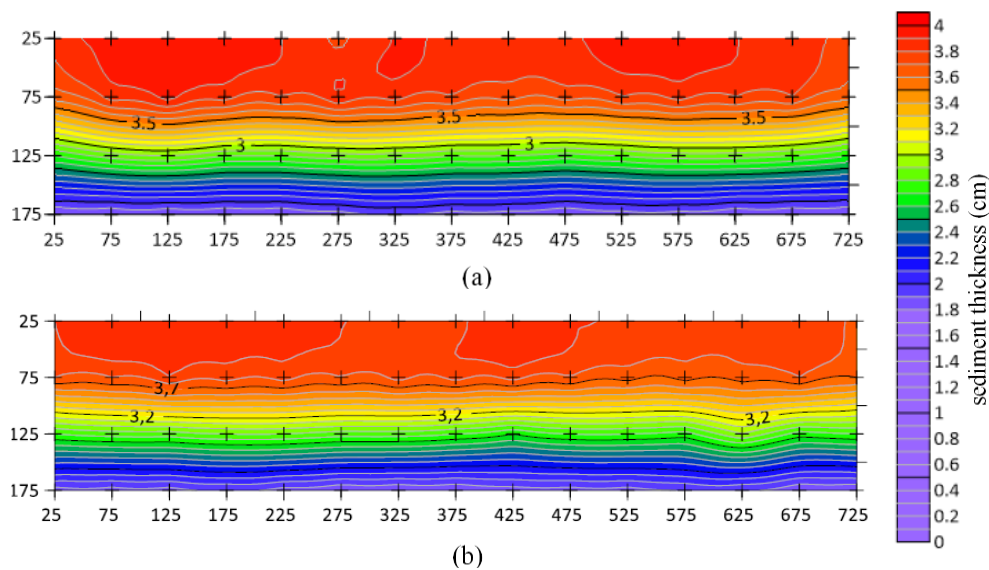


Figure 9. Contour of sediment in front of the submerged rubble-mound breakwater using surfer software after loaded with (a) daily waves simulation and (b) extreme waves simulation

In addition to the contour images, the Surfer also provides an output of 3D images to describe the sediment conditions in the study area. The output 3D images illustrate the condition of the sediment thickness due to daily waves which can be seen in Figure 10. The 3D image of the sediment condition after being loaded with daily waves only illustrates the observation point which according to the data obtained has decreased in sediment thickness. In the outer side of the sediment research area facing the incident wave is 8.8% of reducing in sediment thickness due to daily waves. The output of the Surfer can be compared with the image of the sediment condition after being loaded with daily waves in the laboratory field in Figure 11. It is shown from Figure 10 dan 11 that the scour/deposition pattern in front of the rubble-mound breakwater emerges in the form of alternating scour and deposition areas lying parallel to the submerged rubble-mound breakwater. On the other hand, the outer side of the sediment review area facing the direction of the waves achieves 7.83% of decreasing in sediment thickness due to extreme waves. In the case of the extreme waves simulation, the scour depth in front of submerged breakwater decreases with respect to that experienced in the case of the daily waves simulation. This is expected because the streaming in the extreme waves is weaker due to the smaller reflection, therefore, the resulting scour will be smaller than that of the daily waves (varied of the water depth and wave height).

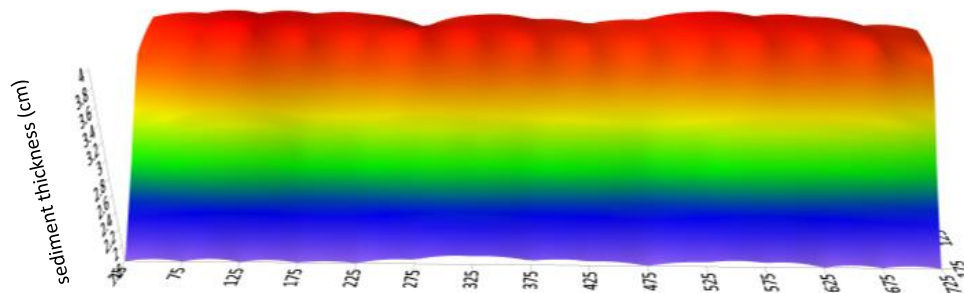


Figure 10. 3D front side of sediment after loading daily waves simulation



Figure 11. Sediment condition after loaded with daily waves simulation

4. Conclusions

Sedimentation in front of the rubble-mound breakwater due to daily and extreme waves simulations was observed with a length of 750 cm and a width of 200 cm. The results of the analysis of all observation points in the sedimentation study area experienced erosion, but the scour that occurred was not constant. The maximum sediment erosion occurred in the outer side of the sediment research area facing the incident waves. Due to daily waves simulation, all the observation points reduced the sediment thickness. On the other hand, three sediment thickness review points did not change, and 57 (fifty-seven) sediment thickness review points were decreased due to extreme waves simulation. The maximum sediment scouring occurs in the outer side of the sediment review area facing the incident waves also obtained by using Suffer software, the scour was 8.8% and 7.83% due to daily and extreme waves, respectively. The scour in front of the submerged rubble-mound breakwater due to daily waves was greater than due to extreme waves because the wave reflection due to extreme waves was weaker than due to daily waves.

Suggestions that can be given based on the results of laboratory tests for sedimentation testing in front of the three-dimensional submerged rubble-mound breakwater which are loaded by daily waves and extreme waves are increasing the number of observation points in the sedimentation research area. By decreasing the distance between the observation points, the data obtained will be more accurate. Thus, not only scour data, but also sediment deposition data in the observation area can be found. Analysis and modelling in future research can be done in more detail. Furthermore, the impact of sedimentation on stability of the submerged rubble-mound breakwater due to daily and extreme waves simulation will be studied in future research.

Acknowledgments

The authors would like to thank the Balai Pantai, Ministry of Public Works and Public Housing of the Republic of Indonesia for providing the research facilities to undertake this research and the Institution of Research and Community Services at Universitas Kristen Maranatha in Indonesia for providing the grant.

References

- [1] Balson P S and Collins M B 2007 *Geol. Soc. Lon. Spec. Publ.* **274** 1
- [2] Sawczyński S and Kaczmarek L M 2014 *Tech. Sci.* **17**(2) 165
- [3] Kraus N C 2005 Shore protection structures *Encyclopedia of Coastal Science (Encyclopedia of Earth Science Series)* ed M L Schwartz (Dordrecht: Springer)
- [4] Fitri A, Hashim R, Abolfathi S and Abdul Maulud K N 2019 *Water* **11**(8) 1721
- [5] Mohamed Rashidi A H, Jamal M H, Hassan M Z, Mohd Sendek S S, Mohd Sopia S L and Abd Hamid M R 2021 *Water* **13**(13) 1741
- [6] Cappietti L and Simonetti I 2020 *J. Coast. Res.* **95**(SI) 197
- [7] Karambas T V and Samaras A G 2021 *J. Mar. Sci. Eng.* **9**(10) 1108
- [8] Bungin E R, Pallu M S, Thaha M A and Lopa R T 2019 *Int. J. Civ. Eng. Technol.* **10**(8)
- [9] Temel A and Dogan M 2021 *Ocean Eng.* **221** 108564
- [10] Joshi P, Goyal P and Goyal P K 2022 Coastline Protection Using a Rubble Mound Seawall: A Case Study *Advances in Construction Materials and Sustainable Environment* (Singapore: Springer) pp 321-330
- [11] Vicinanza D, Lauro E D, Contestabile P and Gisonni C 2019 *Advances J. Waterw. Port Coast. Ocean Eng.* **145**(4)
- [12] Díaz-Carrasco P, Croquer S; Tamimi V, Lacey J and Poncet S 2021 *J. Mar. Sci. Eng.* **9** 611
- [13] Hieu P D, Phan V N, Nguyen V T, Nguyen T V and Tanakae H 2020 *Coast. Eng. J.* **62**(4)
- [14] Zhao H Y, Zhu J F, Liu X L, Jeng D S, Zheng J H and Zhang J S 2020 *Ocean Eng.* **215** 107891
- [15] Fausset S 2017 *Plymouth Stud. Sci.* **10**(1) 195
- [16] Temel A and Dogan M 2021 *Ocean Eng.* **221** 108564
- [17] Scott R D, Turcke D J, Anglin C D and Turcke M A 1990 *J. Coast. Res.* **7** pp 19-28
- [18] Shabankareh O, Ketabdari M J and Shabankareh M A 2017 *Int. J. Coast. Offshore Eng.* **5** pp 9-14
- [19] Litwin U, Pijanowski J M, Szeptalin A and Zygmunt M 2013 *Geomatics, Landmanagement and Landscape* **1** pp 51-61