



PROCEEDING BOOK

International Conference on Environmentally Friendly Civil Engineering Construction and Materials *"Creating and Adapting Sustainable Technologies"*

13-14 November 2014 Manado - Indonesia

Supported by
International Office Affair and
Faculty of Engineering
Sam Ratulangi University

----- *This page is intentionally left blank* -----

PROCEEDING



**The International Conference on Environmentally Friendly Civil
Engineering Construction and Materials**

Creating and Adapting Sustainable Technologies

MANADO –INDONESIA
13 – 14 NOVEMBER 2014

Published by
Civil Engineering Department
Sam Ratulangi University

Editor

Dr. Isri Ronald Mangangka

and

Dr. Liany Amelia Hendrata

Proceeding of The International Conference on Environmentally Friendly Civil Engineering
Construction and Materials, 13-14 November 2014, Manado – Indonesia

p. 416

1. Structure, geopolymer and other construction materials, 2. Water resources and environmental management, 3. Transportation and urban infrastructure, 4. Geotechnical engineering

ISBN: 978-602-71876-1-0 (Electronic Version)

© 2014 Civil Engineering Department Sam Ratulangi University. All rights reserved.

Address: Jl. Kampus Barat – Bahu

Manado 95115

Indonesia

Neither this book nor any part may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, microfilming, and recording, or by any information storage or retrieval system, without prior permission in writing from the publisher

PREFACE

During the recent decades, environmental quality has become a main issue in most aspects of life including in construction industries. Significant progress has been made to protect the quality of environment through implementation of methods and the use of construction materials which pro the quality of environment. Construction industries, however, also significantly contribute to the environmental degradation. Carbon dioxide emission from the manufacture process of portland cement is one of main contributors to the global warming. Therefore, it is important to apply a comprehensive and sustainable approach to reduce the impact of construction industries on environmental quality. Application of methods and use of materials for civil engineering infrastructure which are environmentally friendly would be the wise solution to minimize the environmental impacts due to construction activities.

The conference has been organized to provide an opportunity to link professional and researchers to learn, share and exchange the latest method, approach and developed theories which may reduce the impact of civil engineering construction activities on environmental quality, with following objectives:

1. To provide a forum for exchange of ideas, achievements and experiences and information addressing to environmental issues among academics, researchers, engineers, manufacturers and post graduate scholars in civil engineering field.
2. To discuss and evaluate the latest methods, approaches and innovative technologies to improve environmental quality which are related to civil engineering field.
3. To increase interaction between civil engineering practice, research and education to prevent environmental degradation.

Participants of the conference included researchers, academic staffs, postgraduate students, industries and governments. The keynote speeches during the conference were presented by:

Prof. Joseph Davidovits,

President of Geopolymer Institute in French.

Prof. Vijaya Rangan,

Emeritus Professor from Curtin University, Australia.

Prof. Jun Shimada,

President of Center for Marine Environment Studies, Kumamoto University, Japan

Prof. Ashantha Goonetilleke,

Queensland University of Technology, Australia.

Prof. Djwantoro Hardjito,

Petra Christian University, Indonesia.

Prof. Ofyar Z. Tamin,
Bandung Institute of Technology, Indonesia

Prof. Tommy Ilyas,
University of Indonesia, Indonesia

Dr. Giovanni Luca Pesce,
Univeristy of Bath, United Kingdom.

The conference papers and oral presentations were divided into four major main topics as follow:

1. Structure, Geopolymer and Other Construction Materials.
2. Water Resources and Environmental Management.
3. Transportation and Urban Infrastructure.
4. Geotechnical Engineering.

Finally, the conference Organizing Committee wishes that the conference may provide beneficial scientific information to the participants and the conference proceeding readers.

Organizing Committee,

Dr. Isri Ronald Mangangka
(Chairman)

LIST OF COMMITTEE

STEERING COMMITTEE:

Prof. Ellen Joan Kumaat (Chairman)
Prof. Dody Sumajouw (Co-Chairman)
Prof. J. T. Sembel
Prof. Jeffrey I. Kindangen

SCIENTIFIC COMMITTEE:

Prof. Dody Sumajouw (Chairman)
Prof. Henrico Manalip
Prof. Joseph Davidovits
Prof. Vijaya Rangan
Prof. Ashantha Goonetilleke
Prof. Jun Shimada
Prof. Djwantoro Hardjito
Prof. Tommy Ilyas
Prof. Ofyar Z. Tamin
Dr. Isri Ronald Manganka
Dr. Stennie Wallah

ORGANIZING COMMITTEE:

Dr. Isri Ronald Mangangka (Chairman)
Dr. Stennie Wallah (Co-Chairman)
Amanda Sembel, MT. (Secretary)
Dr. Cindy Jane Supit (Treasurer)
Dr. Lianny Hendrata
Dr. Sukarno
Dr. Wiske Rotinsulu
Dr. Hendra Riogilang
Dr. Reiny Tumbol
Dr. O. B. A. Sompie
dr. Wulan Kaunang
Pankie Pangemanan, M.Si.
Merry Langi, ST.
Vebe Raming, M.Si.
Denny Kembuan, SE

Daniel Pangemanan, MH.
Beinhard Winsy Tampangela, ST
Fary Manopo
Yoost Kowimbin
Karla Pontoh

TABLE OF CONTENTS

TITLE PAGE.....	i
PREFACE	iii
LIST OF COMMITTEE	v
TABLE OF CONTENTS	vii

Keynote Speeches

Geopolymer Concrete Application By B. Vijaya Rangan	1
Scientific Approach to Understand the Trans-boundary Management of Groundwater Resources in Kumamoto Area, Japan By Jun Shimada	9
Climate Change Impact on Urban Stormwater Runoff: Why We Need To Be Concerned By Ashantha Goonetilleke	19
Lime Based Materials in Construction: Experimental investigations for the development and validation of atomic models By R. J. Ball, G. L. Pesce, S. C. Parker and R. J. Grant.....	29
Landslides: Anticipation and Prevention in Indonesia By Tommy Ilyas	37

Topic A

Structure, Geopolymer and Other Construction Materials

Decorative Pervious Concrete: A Solution for Aesthetically Sustainable Green Environment By Tavio and Benny Kusuma	41
Parametric Study on the Compressive Strength of Palm Oil Fuel Ash (POFA) Geopolymer Mortar By Monita Olivia, Winda Astuti H Putri, Lita Darmayanti, Iskandar R Sitompul, Alfian Kamaldi and Zulfikar Djauhari.....	49
Effect of Nano Silica on Durability Properties of Concretes Containing Recycled Coarse Aggregates By Faiz Uddin Ahmed Shaikh and Heasam Odoh.....	57
Effect of Reactive Powder for Compressive Strength Concrete By Tavio and Candra Gunawan.....	65
Experimental Behaviour of RC Columns Externally Confined by Reinforcing Steel Bars Subjected to Axial compression By Utari Khatulistiani and Tavio.....	71
Recycling of Industrial By-products in the Construction Field in Oman – An Overview By Khalifa S. Al-Jabri.....	81

Finite Element Modeling and Experimental Tests of Parkia Speciosa Timber Connections By Yosafat Aji Pranata and Deny Anarista Sitorus	91
Performance Characteristics of Fiber-reinforced Concrete with Polyethylene Terephthalate (PET) Fiber; Part 1. Abrasion Resistance and Chloride Penetration By Ricky N Ratu and Nemkumar Banthia	101
Compressive strength of Fly Ash Based Geopolymer Concrete By Riger Manuahe, Reky S. Windah and Dody M. J. Sumajouw	111
Strength and Deformability of Confined Rectangular Reinforced Concrete Columns with Supplemental Pen-Binder By Anang Kristianto and Iswandi Imran.....	121
Effect of Nano-Silica Particle Addition on Compression Behaviour of Non- Stoichiometrically Cured Epoxy Resin By Markus Karamoy Umboh, Tadaharu Adachi, Masahiro Higuchi and Zoltan Major	129
Statistical Analysis of Confined Columns with Varying Reinforcement Configuration and Ratios By Benny Kusuma, Tavio and Priyo Suprobo.....	141
AE-SiGMA Analysis in Split-Tensile Test of Fiber-Reinforced Concrete (FRC) at Meso- Scale By Mielke R.I.A.J Mondoringin1, Masayasu Ohtsu2.....	155
Fly Ash and GGBS Based Geopolymer Concrete By G.Mallikarjuna Rao, Venu.M and T.D.Gunneswara Rao.....	165
Influence of Sulfate Attack to Reactive Powder Concrete By Widodo Kushartomo, F.X. Supartono and Octavivia.....	177
Preliminary Study of The Development of Volcanic Ash-Based Geopolymer Concrete By Steenie E. Wallah and Ronny E. Pandaleke.....	185
The Effect of Superplasticizer Variation toward the Slump of Fly Ash Based Geopolymer Concrete By Anggie Adityo Aer, Ronny E. Pandeke and Dody M.J. Sumajouw	191
Durability and Performance of Polymer Modified Ferrocement in General Application By Fahrizal Zulkarnain and Mohd. Zailan Sulieman.....	205
Application of European Yield Model on Joint Laterally Strength Analysis of Bamboo Component Two with Void Filled Morta By Gusti Made Oka, Andreas Triwiyono, Suprpto Siswosukarto and Ali Awaludin	213
Sustainable Concrete with The Use of GGBS: The Maturity Method for Predicting Strength Development of Concrete By Gidion Turu'allo and Marios N. Soutsos.....	223
Improving the Mechanical Properties of Aluminum 6063 Structural Items by Varying the Chemical Composition By Indika De Silva, Asela Perera, Navinda Kodikara and Asanka De Silva	233

Study of Tensile Strength of Geopolymer Concrete with Amurang Fly Ash as a Source Material By Andre K. Putra1, Filia E.S. Paat, S.O. Dapas, R.S. Windah and S.E. Wallah	239
A study of Green Construction Assessment of Two Buildings in Yogyakarta By Peter F Kaming	247
Lightweight High-strength Concrete with Expanded Polystyrene Beads as Building Materials in Earthquake Zones By Tengku Fitriani L. Subhan, Tommy.A.M. Tilaar and Ravi Sri Ravindrarajah	257
Development of Thermal Comfort Model in Minahasa Stilt House Industrial Production with Optimization the Effect of Outer Room Design By Debbie Augustien Jeannet Harimu	265

Topic B

Water Resources and Environmental Management

The Implication of Critical Shear Stress of Erosion on the Depth of Sediment in Brantas River – East Java By Wati Asriningsih Pranoto and Abrar Riza	287
Analysis of Treatment Performance of Constructed Stormwater Wetlands with Utilising a Simplified Conceptual Model By Isri Ronald Mangangka, Ashantha Goonetilleke, Prasanna Egodawatta, Sukarno and Cindy Jeane Supit	297
Effect of Regularly Square Ribs Roughness on Turbulent Flow Structure in Cases Two and Three-dimensional Roughness in an Open Channel By Sukarno, Lianny Hendratta, Isri Ronald Mangangka, Cindy Jeane Supit and Terunori Ohmoto.....	309
Rheological Characteristics of Hyperconcentrated Sediment-laden Flow By Liany A. Hendratta, Tiny Mananoma, Jeffry Sumarauw and Terunori Ohmoto	317
Identification of Water Resources at Botanical Garden in Pasir Impun, West Java, Using Georesistivity Method, Wenner Configuration By Diyan Parwatiningtyas, Achmad Sjamsuri and Dasmu	323
Water Resources Management by Modelling of Dam Operation By Cindy Jeane Supit, Isri Ronald Mangangka, Sukarno and Audy Supit	333
A Study on Performance of The Traditonal Protection to Reduce The Inundation Area in Saga Plain By Ariestides K. T. Dundu, Koichiro Ohgushi and Hiroyuki Araki.....	341

Topic C

Transportation and Urban Infrastructure

Evaluation of Coastal Vulnerability Assessment and Coastal Management for Karangantu Coastal Area in Banten - Indonesia By Olga Pattipawaej and Hanny Dani	351
---	-----

Arrangement of Environmentally Sound Ship Recycling Yard in Indonesia By Sunaryo and Dovan Pahalatua	361
Study on Airline Hub Eastern Part of Indonesia Facing the ASEAN Open Sky Policy: (A Case Study of Full Service Carrier Airlines in Sultan Hasanuddin International Airport) By Sakti Adji Adisasmita, Nur Ali, Mubassirang Pasra and Dantje Runtulalo	369
Enhancing Infrastructure in the Indonesia - Malaysia Border Areas Development (Case Studies in Entikong, Sanggau District, West Kalimantan) By Tommy Ilyas, Dwi Dinariana, Fitri Suryani and Henni	379
Toward Great Streets Using Urban Design Approach: The Case Study of Manado By Febriane Paulina Makalew.....	385

Topic D

Geotechnical Engineering

Load Settlement behavior of Bored Pile Based on The Result of Load Test and FEM By Asriwiyanti Desiani and Angel Refanie	395
Recommendation of Viscosity Values for Mudflow By Budijanto Widjaja, David Wibisono Setiabudi and Ivan Arista	401
Soil air Gas Survey at Makaroyen Village in Kotamobagu Geothermal Field, North Sulawesi, Indonesia By Hendra Riogilang, Oscar Hans Kaseke, Saartje Monintja and Cindy Jeane Supit.....	407
Bending Moment of Flexible Batter Piles in Sand under Horizontal Loads By Fabian J. Manoppo	413

KEYNOTE SPEECHES



STRENGTH AND DEFORMABILITY OF CONFINED RECTANGULAR REINFORCED CONCRETE COLUMNS WITH SUPPLEMENTAL PEN-BINDER

Anang Kristianto¹, Iswandi Imran²

¹ Maranatha Christian University, Dept. of Civil Engineering, Bandung, Indonesia

² Bandung Institute of Technology, Dept. of Civil Engineering, Bandung, Indonesia
e-mail: anang.kristianto@gmail.com

ABSTRACT

Some parts of Indonesia are located in a region with high seismic risk. In this region, it is compulsory to have a structure that consistently meets the stringent requirements of earthquake resistant buildings. Consistent implementation of the earthquake resistant design will result in a structure that can survive a strong earthquake. One of the seismic provisions of SNI 03-2847-02 [1] requires that reinforced concrete columns of a structure be confined using hoop reinforcement with seismic hook. The concept of confinement in reinforced concrete columns is intended for when the cover spalls off a tied column does not fail immediately because the strength of the core is enhanced by triaxial stresses resulting from the confining effect of the transverse or hoop reinforcement. As a result, the column can undergo large deformation, eventually reaching a second maximum load, when the transverse reinforcement yields. Installation of this kind of confining reinforcement is so tedious, especially for large dimensions columns commonly used in high rise buildings, flyovers and bridges. The research study reported in this paper introduces a simple device called “pen-binder” that can be attached onto the non-compliance confining reinforcement at construction sites. The use of pen-binder to hold the confining reinforcement in r/c column improves strength and ductility of column very significantly. In general, column specimens with code non-compliance confining reinforcement plus pen-binder show better strength and ductility than column specimens with code compliance confining reinforcement. A parametric study has also been carried out to find out the effect of confinement ratio. The parametric study revealed some very important observations regarding the behaviour of confinement of rectangular reinforced concrete columns with supplemental pen-binder

KEYWORDS: Column, Confinement, Pen-binder, strength, ductility

1 INTRODUCTION

The concept of confinement in reinforced concrete columns is intended for when the cover spalls off a tied column does not fail immediately because the strength of the core is enhanced by triaxial stresses resulting from the confining effect of the transverse or hoop reinforcement. As a result, the column can undergo large deformation, eventually reaching a second maximum load, when the transverse reinforcement yields. The provision of transverse or confining reinforcement in the current SNI/ACI Code is based on the work of Richart et al. (1929), and is developed such that the compressive strength of the confined core of a column after cover spalling is equal to the compressive strength of the gross section of the column before cover spalling.

Inelastic deformability of reinforced concrete columns is important for overall strength and stability of structures during earthquake. Deformability of columns can be achieved through proper confinement of the core concrete. Many research studies on reinforced concrete columns confined using confining reinforcement with 90-degree hook show that opening of 90-degree hook initiates failure, leading to

buckling of the outer longitudinal reinforcing bars. It is also concluded in those research studies that the use of confining reinforcement with 90-degree hook can result in poor seismic performance of the structure (Sheikh and Yeh 1990; Saatcioglu and Razvi 1992; Wehbe et al. 1999).

The research study reported in this paper introduces a simple device called "pen-binder" to be attached onto the non-compliance confining reinforcement at construction sites. The use of this "pen-binder" is expected to improve the structural performance of the code non-compliance confining reinforcement to be at least the same as that of the code compliance one

2 EXPERIMENTAL PROGRAM

2.1 Test Specimens

The specimens tested in this study were 18 column specimens, with 170 mm x 170 mm in cross section and 480 mm in height. Figure 1 illustrates the geometry of a typical column and strain gauges placement.

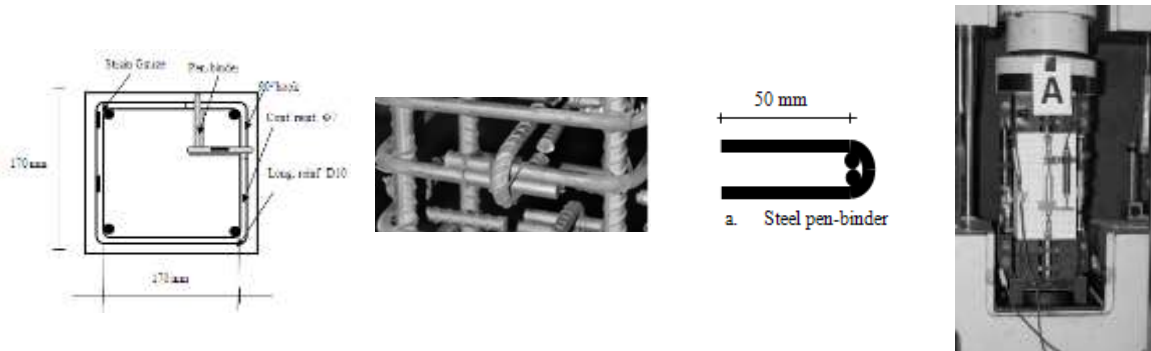


Figure 1 : Test Specimen, pen-binder geometry and test setup

The test series reported here were designed to investigate three parameters influencing the behaviour of columns, these are volumetric ratio, the angle of hook applied and the configurations of confining reinforcement. Two types of volumetric ratio ($A_{sh}/(s.h_c)\%$) are used in this case, i.e: spacing confinement, $s = 35$ mm (1.9%) and $s = 70$ mm (0.9 %) . Different configuration of confining reinforcement used in the test specimens are illustrated in Figure 2.

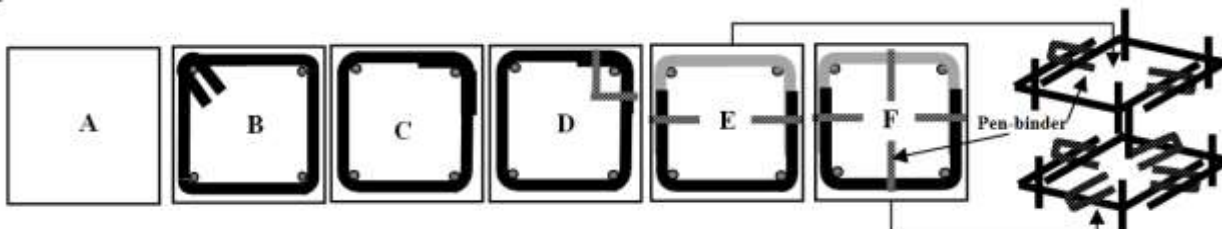


Figure 2: Configuration of confining reinforcement

A summary of all test specimens and their properties is provided in Table 1.

Table 1 : Details of test specimens

Test Specimens $f'_c=32$ MPa/ Configuration		Confining reinforcement (Dia. 7.3 mm, $f_{yh}=336$ MPa, $E=172721$ MPa)		Pen-binder (Dia.7.65mm)	Longitudinal reinf. 4-D10, $f_y=414$ MPa, $E=207390$ MPa, $\rho=1.23\%$)
		s(mm)	$A_{sh}/(s.h_c)\%$	Material	
K0-0-0	A				
K135-0-35	B			Steel	
K90-0-35	C	35	1.9	$(f_y=414$ MPa, $E=177041$ MPa)	
K90-2P1-35	D				
K90A-2P1-35	E				
K90A-4P1-35	F				
K135-0-70	B			Steel	
K90-0-70	C			$(f_y=414$	
K90-2P1-70	D	70	0.9	MPa, $E=177041$ MPa)	
K90A-2P1-70	E				
K90A-4P1-70	F				

Configuration A is concrete column without reinforcement, configuration B is column with code compliance confining reinforcement, C and D are code non-compliance confining reinforcement without and with pen-binder in 90° hook zone respectively, E and F are those with double C confining reinforcement with pen-binders installed in two sides and all sides of confining reinforcement, respectively. Double C configurations of confining reinforcement are commonly used for large size columns.

2.2 Test Setup

The column specimens were tested using a Dartec compression testing machine with a 1500 kN load capacity (Fig. 1). The specimens were externally confined in the top and bottom regions by steel brackets. LVDTs (Linear Variable Differential Transducers) were placed on each column face to measure axial deformations of the specimens. Strain in confining reinforcement was measured using electric strain gauges (Figure 2). The specimens were loaded slowly. LVDTs were monitored throughout loading to insure concentric loading and the resulting data were recorded by data logger. The loading was continued until a significant drop in load capacity was observed.

3 TEST RESULTS

All column specimens showed similar initial behavior, the ascending branches of load-strain relationships were almost linear up to beginning of cover spalling. The first crack appeared on column faces at a concrete strain of approximately 0.2 percent. The measured peak load and the corresponding axial strain curve for each configuration is shown in Figure 3. Columns specimens with volumetric ratio 1.9% show different behaviour at all configuration confinement reinforcement. The poorest behavior among the four configuration was shown by configuration E, after spalling of the cover the longitudinal bar start to buckle slip and push the confinement outward, resulting in loss of confinement and rapid deterioration of the specimen. Although the specimen confined with supplemental pen-binder, a lack of ductility as compared to other specimens is quite obvious. Column specimens with volumetric ratio 0.9% was not shown different behaviour significantly for each configuration, the specimen was not shown

ability to confined concrete core, poor ductility behaviour was shown by this specimens for all configurations.

Column deformability reflects the ability of columns to deform without a significant loss of strength. Deformability of columns tested in this research program was investigated by examining axial load-axial strain relationships of core concrete. Summary of experimental results for some specimens shows in Table 2. Column axial strength improvement (K) was determined from confined concrete strength (f'_{cc}) and unconfined concrete strength (f'_{co}) ratio as shown in row[9].

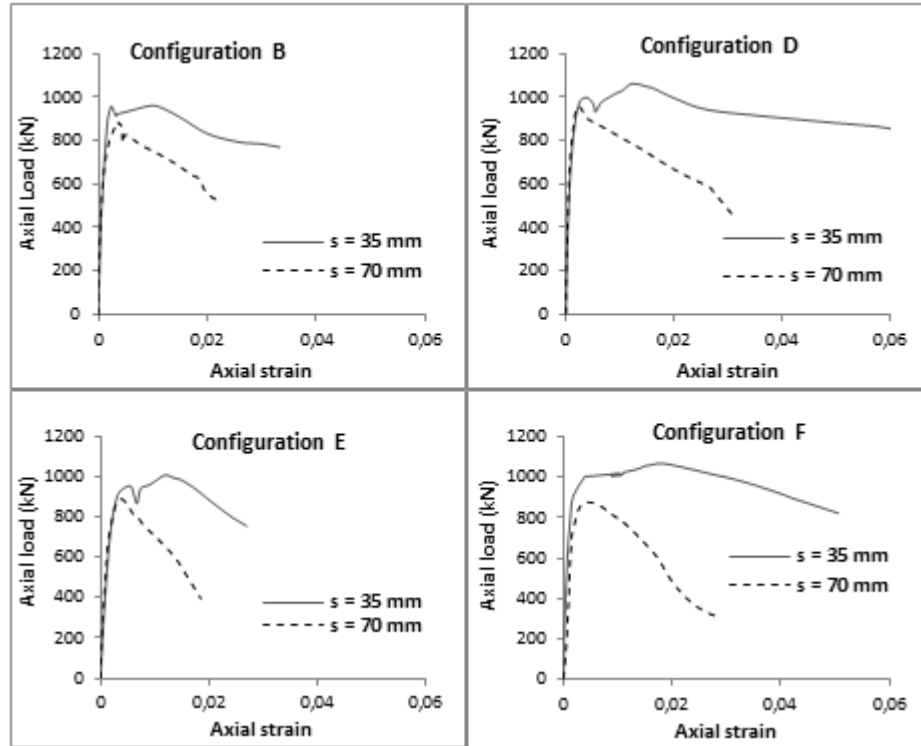


Figure 3: Load versus axial strain diagram columns specimens

Axial strain ductility ratio was used to quantify column deformability. The strain ductility ratio was defined as the ratio of axial strain of confined concrete at 15 percent strength decay beyond the peak stress (ϵ_{85}) divided by the strain corresponding to the peak stress of unconfined concrete (ϵ_l), row [10] at Table 2 shows axial strain ductility ratio was proposed by Saatcioglu and Razvi (2002). Column [11] shown the effective confinement index was proposed by Paultre and Legeron (2008), which is defined as

$$I_c = \frac{f_{le}}{f'_{co}} \quad (1)$$

where f_{le} effective confinement pressure at peak stress, which is a measure of the restraint applied by the hoops to the lateral expansion of the confined concrete core under axial compression, for rectangular columns :

$$f_{le} = k_s \cdot f_l = k_s \cdot \frac{A_{sh} \cdot f_{sh}}{s h_c} \quad (2)$$

where k_e geometric confinement effectiveness coefficient, which measures the effectiveness of the confinement reinforcement to confine concrete and varies from 1 for a continuous tube to 0 when ties are spaced more than half the core cross section minimum dimension, in which case, some part of the columns are not confined at all; A_{sh} = total section of confinement reinforcement for the set of ties in one direction ; c = cross section dimension, measured center-to-center of peripheral ties or spiral; s = center-to-center spacing between ties, and f_{sh} = stress in the confinement reinforcement at peak stress. At Table 2 the value of k_e is used the same value for all specimens ($k_e=0.487$).

Table 2 : Summary of test results

No.	Specimens	At P_{max}				f'_{co} (MPa)	f'_{cc} (MPa)	$K = \frac{f'_{cc}}{f'_{co}}$	$\frac{\epsilon_{85}}{\epsilon_1}$	I_c (%)
		ϵ_{transv}	f_{sh} (MPa)	f_l (MPa)	f_{lc} (MPa)					
[1]	[2]	[3]	[4]	[5]	[6]	[7]	[8]	[9]	[10]	[11]
1	K135-0-35	0,0031	336,0	6,1	2,92	26,99	35,96	1,33	9,25	10,84
2	K90-0-35	0,0009	148,0	2,7	1,29	26,99	38,31	1,42	2,68	4,77
3	K90-2P1-35	0,0040	336,0	6,1	2,92	26,99	40,45	1,50	10,03	10,84
4	K90A-2P1-35	0,0027	336,0	6,1	2,92	26,99	38,00	1,41	3,83	10,84
5	K90A-4P1-35	0,0026	336,0	6,1	2,92	26,99	40,67	1,51	9,64	10,84
6	K135-0-70	0,0011	190,0	1,7	0,83	26,99	32,68	1,21	2,77	3,06
7	K90-0-70	0,0009	150,3	1,4	0,65	26,99	31,25	1,16	1,92	2,42
8	K90-2P1-70	0,0009	155,3	1,4	0,68	26,99	35,90	1,33	4,35	2,50
9	K90A-2P1-70	0,0014	247,0	2,2	1,08	26,99	32,81	1,22	2,11	3,98
10	K90A-4P1-70	0,0026	336,0	3,0	1,46	26,99	32,24	1,19	2,76	5,42

Based on Tabel 2, results confirm previous findings. Volumetric ratio improve ductility ratio and confinement index significantly. The increase in the volumetric ratio of confinement reinforcement resulted in higher confining pressure on concrete and produced strength and ductility enhancement. Column with low volumetric ratios exhibit brittle behavior, showing high rate of strength decay immediately after peak load or poor ductility ratio. On the other hand, column with higher volumetric ratio of steel are able to deform significantly without a significant strength decay. The improvements observed in deformability are more pronounced in column with supplemental pen-binder. Specimen with configuration D gives the highest improvement in column strength and ductility. A stable confining reinforcement is essential to continue providing effective confinement against the lateral expansion of concrete beyond the peak stress. Therefore the pen-binder plays important role to hold confining reinforcement which will improve ductility ratio and effective confinement index significantly

Reduction in confinement spacing increases effectiveness of confinement and improves column strength and ductility. Spacing of confinement reinforcement is an important parameter that affects the distribution of confinement pressure and stability of longitudinal reinforcement. Closer spacing of confinement reinforcement is known to increase the uniformity of lateral pressure, thereby improving the effective confinement index. The effectiveness of confinement reinforcement diminishes quickly with increasing tie spacing. Pen-binder hold confining reinforcement significantly at tie level, the lateral pressure between the ties reduce with the distance from the longitudinal reinforcement, this reduction

occurs at a faster rate than that of the pressure at the tie level. Figure 4 shows effect of volumetric ratio to K , ductility ratio and effective confinement index.

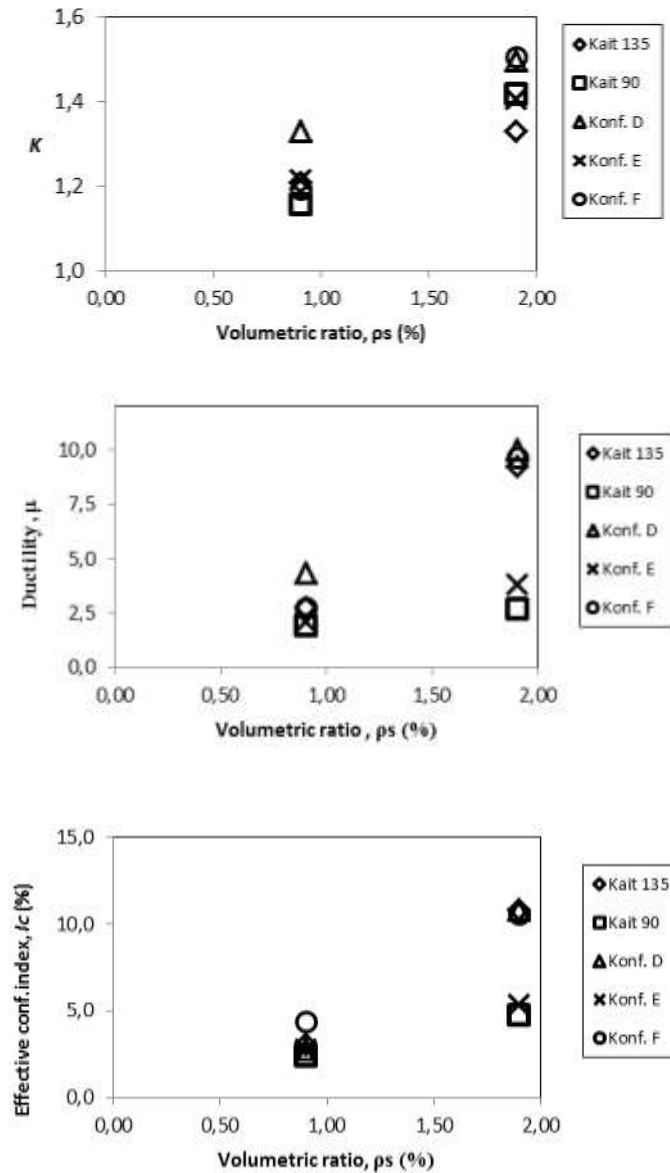


Figure 4: Effect of volumetric ratio to the K , ductility and effective confinement index

4 CONCLUSIONS

The increase in the volumetric ratio of confinement reinforcement resulted in higher confining pressure on concrete and produced strength and ductility enhancement.

Cconfiguration with additional pen-binder at 90° hook zone of non-compliance hoop reinforcement (i.e. configuration D) shows the highest strength and ductility enhancement.

The effectiveness of confinement reinforcement diminishes quickly with increasing tie spacing, supplemental pen-binder hold confining reinforcement significantly at tie level.

5 ACKNOWLEDGEMENTS

The research presented in this paper was supported by grant from Competitive Grant Program of the National Research Priority Based Batch 2 (2009) and the Doctoral Dissertation Research Grant, Maranatha Christian University, Indonesia.

6 REFERENCES

- Kristianto, A.; Imran, I.; Suarjana, M.; Pane, I.;(2012), *Confinement Of Reinforced Concrete Columns With Non Compliance Confining Reinforcement Plus Supplemental Pen-binder* . ITB Journal of Engineering Science, Vol 44 No.3, pp. 220-237.
- Kristianto, A.; Imran, I.; Suarjana, M.;(2011), *Behavior Of R/C Column Confined With Code Non-Compliance Confining Reinforcement Plus Supplemental Pen-binder Under Axial Concentric Loading*. 2nd International Conference on Earthquake Engineering and Disaster Mitigation (ICEEDM-II), 19-20 July 2011, Surabaya
- Paultre P.; Legeron F.,(2008). *Confinement Reinforcement Design for Reinforced Concrete Columns*, ASCE Journal of Structural Engineering, Vol 134. No5 May 2008.pp738-749.
- Richart et al. (1929), *The Failure of Plain and Spirally R.C in compression*, Engineering Experiment Station Bulletin, No. 190, University of Illinois, Urbana, pp 14.
- Sheikh, S. A., and Yeh, C.,(1990). *Tied Concrete Columns under Axial Load and Flexure*, Journal of Structural Engineering, ASCE, V. 116, No. 10, Oct. 1990, pp. 2780-2800.
- Saatcioglu M and Razvi S.R.(1992). *Strength and Ductility of Confined Concrete*, Journal of Structural Engineering, ASCE, V. 118, No. 6, June 1992, pp. 1590-1607.
- Wehbe, N. I.; Saiidi M. S.; and Sanders, D. H.,(1999). *Seismic Performance of Rectangular Bridge Columns with Moderate Confinement*, ACI Structural Journal, V. 96, No. 2, Mar.-Apr. 1999, pp. 248-258