

BUILDING INTELLIGENCE THROUGH IOT AND BIG DATA

Organized by



INFORMATICS DEPARTMENT
Petra Christian University



CONTINUING
EDUCATION
CENTRE

Supported by



PT. Catalyst Solusi Integrasi
IT Security Integrator



In Collaboration with



INDUSTRIAL ENGINEERING
Petra Christian University

CONFERENCE INFORMATION

PAPERS BY SESSION

PAPERS BY AUTHOR

GETTING STARTED

TRADEMARKS

SEARCH

Proceedings

**2017 International Conference
on Soft Computing, Intelligent System
and Information Technology
ICSIIT 2017**

**Denpasar, Bali, Indonesia
26-29 September 2017**

Proceedings

**2017 International Conference
on Soft Computing, Intelligent System
and Information Technology
ICSIIT 2017**

**Denpasar, Bali, Indonesia
26-29 September 2017**

**Edited by
Henry Novianus Palit and Leo Willyanto Santoso**



Copyright © 2017 by The Institute of Electrical and Electronics Engineers, Inc.
All rights reserved.

Copyright and Reprint Permissions: Abstracting is permitted with credit to the source. Libraries may photocopy beyond the limits of US copyright law, for private use of patrons, those articles in this volume that carry a code at the bottom of the first page, provided that the per-copy fee indicated in the code is paid through the Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923.

Other copying, reprint, or republication requests should be addressed to: IEEE Copyrights Manager, IEEE Service Center, 445 Hoes Lane, P.O. Box 133, Piscataway, NJ 08855-1331.

The papers in this book comprise the proceedings of the meeting mentioned on the cover and title page. They reflect the authors' opinions and, in the interests of timely dissemination, are published as presented and without change. Their inclusion in this publication does not necessarily constitute endorsement by the editors, the IEEE Computer Society, or the Institute of Electrical and Electronics Engineers, Inc.

IEEE Computer Society Order Number E6163
ISBN-13: 978-1-4673-9899-2
BMS Part # CFP17M16-ART

Additional copies may be ordered from:

IEEE Computer Society
Customer Service Center
10662 Los Vaqueros Circle
P.O. Box 3014
Los Alamitos, CA 90720-1314
Tel: +1 800 272 6657
Fax: +1 714 821 4641
<http://computer.org/cspress>
csbooks@computer.org

IEEE Service Center
445 Hoes Lane
P.O. Box 1331
Piscataway, NJ 08855-1331
Tel: +1 732 981 0060
Fax: +1 732 981 9667
[http://shop.ieee.org/store/
customer-service@ieee.org](http://shop.ieee.org/store/customer-service@ieee.org)

IEEE Computer Society
Asia/Pacific Office
Watanabe Bldg., 1-4-2
Minami-Aoyama
Minato-ku, Tokyo 107-0062
JAPAN
Tel: +81 3 3408 3118
Fax: +81 3 3408 3553
tokyo.ofc@computer.org

Individual paper REPRINTS may be ordered at: <reprints@computer.org>

Editorial production by Juan E. Guerrero
Cover art production by Annie Jiu



**IEEE Computer Society
Conference Publishing Services (CPS)**

<http://www.computer.org/cps>

2017 International Conference on Soft Computing, Intelligent System and Information Technology

ICSIIT 2017

Table of Contents

Preface	.xi
Conference Organization.....	.xii
Program Committee	.xiii
Reviewers	.xv

Classification and Correlation Techniques

Gesture Recognition for Indonesian Sign Language Systems (ISLS) Using Multimodal Sensor Leap Motion and Myo Armband Controllers Based on Naïve Bayes Classifier	1
<i>Khamid, Adhi Dharma Wibawa, and Surya Sumpeno</i>	
Waah: Infants Cry Classification of Physiological State Based on Audio Features	7
<i>Ramon L. Rodriguez and Susan S. Caluya</i>	
Fuzzy Clustering and Bidirectional Long Short-Term Memory for Sleep Stages Classification	11
<i>Intan Nurma Yulita, Mohamad Ivan Fanany, and Aniati Murni Arymurthy</i>	
MFCC Feature Classification from Culex and Aedes Aegypti Mosquitoes Noise Using Support Vector Machine	17
<i>Achmad Lukman, Agus Harjoko, and Chuan-Kay Yang</i>	
Automatic Chord Arrangement with Key Detection for Monophonic Music	21
<i>Bor-Shen Lin and Ting-Chun Yeh</i>	
Credit Scoring Refinement Using Optimized Logistic Regression	26
<i>Hendri Sutrisno and Siana Halim</i>	
Anomaly Detection System Based on Classifier Fusion in ICS Environment	32
<i>Jan Vávra and Martin Hromada</i>	

Efficient Object Recognition with Multi-directional Features in Urban Scenes	39
<i>Ryo Kawanami and Kousuke Matsushima</i>	

Feature Extraction and Image Recognition Methods

Timor Leste Tais Motif Recognition Using Wavelet and Backpropagation	45
<i>Vasio Sarmento Soares, Albertus Joko Santoso, and Djoko Budyanto Setyohadi</i>	
The Model and Implementation of Javanese Script Image Transliteration	51
<i>Anastasia Rita Widiarti, Agus Harjoko, Marsono, and Sri Hartati</i>	
Human Activity Recognition by Using Nearest Neighbor Algorithm from Digital Image	58
<i>Muhammad Ihsan Zul, Istianah Muslim, and Luqman Hakim</i>	
Night to Day Algorithm for Video Camera	62
<i>Stefan Jack Lionardi, Mariëlle Fransen, and Andreas Handojo</i>	
Arca Detection and Matching Using Scale Invariant Feature Transform (SIFT) Method of Stereo Camera	66
<i>Aviv Yuniar Rahman, Surya Sumpeno, and Mauridhi Hery Purnomo</i>	
The Application of Deep Convolutional Denoising Autoencoder for Optical Character Recognition Preprocessing	72
<i>Christopher Wiraatmaja, Kartika Gunadi, and Iwan Njoto Sandjaja</i>	
Acne Segmentation and Classification Using Region Growing and Self-Organizing Map	78
<i>Gregorius Satia Budhi, Rudy Adipranata, and Ari Gunawan</i>	

Algorithms for Intelligent Computation

Extended Concept of Generalized Fuzzy Rough Sets on Asymmetric Fuzzy Coverings	84
<i>Rolly Intan</i>	
The Proposal of the Software for the Soft Targets Assessment	90
<i>Lucia Duricova, Martin Hromada, and Jan Mrazek</i>	
Application of Artificial Intelligence (AI) in Search Engine Optimization (SEO)	96
<i>Yodhi Yuniarthe</i>	
Spatial Model Design of Landslide Vulnerability Early Detection with Exponential Smoothing Method Using Google API	102
<i>Kristoko Dwi Hartomo, Sri Yulianto, and Joko Ma'ruf</i>	
Measures of Dependency in Metric Decision Systems and Databases	107
<i>Anh Duy Tran, Somjit Arch-int, and Ngamnij Arch-int</i>	
Multiple Scattered Local Search for Course Scheduling Problem	114
<i>Ade Jamal</i>	

The Software Proposes for Management and Decision Making at Process Transportation	120
<i>Jan Mrazek, Lucia Duricova, and Martin Hromada</i>	

Distributed Systems and Computer Networks

A Self-Adaptive Architecture with Energy Management in Virtualized Environments	124
<i>I Made Murwantara, Behzad Bordbar, and João Bosco Ferreira Filho</i>	
Nanoservices as Generalization Services in Service-Oriented Architecture	131
<i>Sutrisno, Frans Panduwinata, and Pujianto Yugopuspito</i>	
Automated Concurrency Testing for Cloud-Based Polling Systems	138
<i>Hans Dulimarta</i>	
Low-Overhead Multihop Device-to-Device Communications in Software Defined Wireless Networks	144
<i>Riyanto Jayadi and Yuan-Cheng Lai</i>	
A Secure Anonymous Authentication Scheme for Roaming Service in Global Mobility Network	150
<i>Kuo-Yang Wu, Yo-Hsuan Chuang, Tzong-Chen Wu, and Nai-Wei Lo</i>	
Linux PAM to LDAP Authentication Migration	155
<i>Justinus Andjarwirawan, Henry Novianus Palit, and Julio Christian Salim</i>	
Exploratory Research on Developing Hadoop-Based Data Analytics Tools	160
<i>Henry Novianus Palit, Lily Puspa Dewi, Andreas Handojo, Kenny Basuki, and Mikiavonty Endrawati Mirabel</i>	

Mobile and Pervasive IoT Applications

Human Heart Rate Detection Application	167
<i>Semuil Tjiharjadi and AUFAR Fajar</i>	
Near Field Communication Technology in Delivering Information in Museums	173
<i>Djoni Haryadi Setiabudi, Ryan Christian Wiguno, and Henry Novianus Palit</i>	
Android Application for Monitoring Soil Moisture Using Raspberry Pi	178
<i>Lily Puspa Dewi, Justinus Andjarwirawan, and Robin Putra Wardojo</i>	
Development of Mobile Indoor Positioning System Application Using Android and Bluetooth Low Energy with Trilateration Method	185
<i>Agustinus Noertjahyana, Ignatius Alex Wijayanto, and Justinus Andjarwirawan</i>	

Assessments of Integrated IS/IT

The Proposal of United Crisis Management Information Systems of the Czech Republic	190
<i>Katerina Vichova, Martin Hromada, and Ludek Lukas</i>	
The Analysis of Academic Information System Success: A Case Study at Instituto Profissional De Canossa (IPDC) Dili Timor-Leste	196
<i>Apolinario Dos Santos, Albertus Joko Santoso, and Djoko Budiyo Setyohadi</i>	
Identification of Factors Influencing the Success of Hospital Information System (SIRS) by Hot-Fit Model 2006: A Case Study of RSUD Dr Samratulangi Tondano, Minahasa Regency, North Sulawesi	202
<i>Frendy Rocky Rumambi, Albertus Joko Santoso, and Djoko Budiyo Setyohadi</i>	
The Alignment of IT and Business Strategy at ROC Leeuwenborgh	208
<i>Frederick Wonges, Jack Zijlmans, and Leo Willyanto Santoso</i>	
Development of Capability Assessment Model of IT Operation Management Process with Organizational Behavior	214
<i>Luh Made Wisnu Satyaninggrat and Kridanto Surendro</i>	
Exploring Critical Success Factors of Mobile Learning as Perceived by Students of the College of Computer Studies – National University	220
<i>Bernie S. Fabito</i>	
Identifying Characteristics and Configurations in Open Source ERP in Accounting Using ASAP: A Case Study on SME	227
<i>Agung Terminanto and Achmad Nizar Hidayanto</i>	

Simulation and Virtual Reality Applications

The Real Time Training System with Kinect: Trainer Approach	233
<i>Ivana Valentine Masala and Apriandy Angdresey</i>	
3D LIDAR City Model Application and Marketing Plan Development	238
<i>Kevin Sanjaya, Frank Henning, and Kristo Radion Purba</i>	
Periodic Review Inventory Model Simulations for Imperfect Quality Items and Stochastic Demand	243
<i>Gede A. Widyadana, Audrey T. Widjaja, and Irena Liong</i>	
Simulation on Crowd Mobility of Moving Objects Using Multi-agent and ClearPath	250
<i>Baihaqi Siregar, Agnes Irene Silitonga, Erna Budhiarti Nababan, Ulfi Andayani, and Fahmi Fahmi</i>	
Truck Management Integrated Information System in a Shipping Line Company	257
<i>Arnold Samuel Chan and I Nyoman Sutapa</i>	

Simulation of Atmosphere in Trowulan during the Golden Era of Majapahit Using Virtual Reality	263
<i>Daniel Kusuma, Rudi Adipranata, and Erandaru</i>	
Development of Interactive Learning Media for Simulating Human Digestive System	270
<i>Kristo Radion Purba, Liliana, and Daniel Runtulalu</i>	
Development of Interactive Learning Media for Simulating Human Blood Circulatory System	275
<i>Kristo Radion Purba, Liliana, and Yohanes Nicolas Paulo Kwarrie</i>	

Smart Assistive Technologies

Fall Detection Application Using Kinect	279
<i>Kartika Gunadi, Liliana, and Jonathan Tjitrokusmo</i>	
Driver Drowsiness Detection Using Visual Information on Android Device	283
<i>Aldila Riztiane, David Habsara Hareva, Dina Stefani, and Samuel Lukas</i>	
Epileptic Alert System on Smartphone	288
<i>Aziis Yudha Adwitiya, David Habsara Hareva, and Irene Astuti Lazarusli</i>	
Elderly Healthcare Assistance Application Using Mobile Phone	292
<i>Andreas Handojo, Tioe Julio Adrian Sutiono, and Anita Nathania Purbowo</i>	
Socially-Enhanced Variants of Mobile Bingo Game: Towards Personalized Cognitive and Social Engagement among Seniors	297
<i>Chien-Sing Lee, Shanice Wei-Ling Chan, and Sheng-Yee Guy</i>	

Smart Mobile Applications

M-Guide: Hybrid Recommender System Tourism in East-Timor	303
<i>Jaime da Costa Lobo Soares, Suyoto, and Albertus Joko Santoso</i>	
M-Guide: Recommending Systems of Food Centre in Buleleng Regency	310
<i>Komang Ananta Wijaya, Suyoto, and Albertus Joko Santoso</i>	
Empowering Public Secondary Schools on Disaster Response and Recovery: A Framework for the Development of Helpline Mobile Application	315
<i>Odette Saavedra, Matthew C. Abrera, Mickaela Carla L. Waniwan, Curly Kale C. Dava, and Bernie S. Fabito</i>	
A Framework Mobile Game Application that Teaches Parts of Speech in Grade 3 in Filipino	321
<i>John Erasmus Correa, Jastine Gamboa, Mark Edison Lavapie, Edzel Uy, and Ramon L. Rodriguez</i>	
iSagip: A Crowdsourced Disaster Relief and Monitoring Application Framework	327
<i>Auxesis Jacobi M. Schwab, John Eduard C. Omaña, Kent V. Roazol, Ted Anthony Y. Abe, and Bernie S. Fabito</i>	

Case Studies of Knowledge Discovery and Management

Executive Dashboard as a Tool for Knowledge Discovery	331
<i>Nyoman Karna</i>	
Data Mining Applications for Sales Information System Using Market Basket Analysis on Stationery Company	337
<i>Alexander Setiawan, Gregorius Satia Budhi, Djoni Haryadi Setiabudi, and Ricky Djunaidy</i>	
A Knowledge Management-Extended Gamified Customer Relationship Management System	341
<i>Chien-Sing Lee, Jun-Jie Foo, Vinudha a/p Jeya Sangar, Pei-Yee Chan, Weng-Keen Hor, and Eng-Keong Chan</i>	
Web Based Customer Relationship Management Application for Helping Sales Analysis on Bike Manufacturer	347
<i>Anita Nathania Purbowo, Yulia, and Agustinus Ivan Suryadi</i>	
Replenishment Strategy Based on Historical Data and Forecast of Safety Stock	353
<i>Allysia Ongkicyntia and Jani Rahardjo</i>	
On Estimation and Prediction of Simple Model and Spatial Hierarchical Model for Temperature Extremes	359
<i>Indriati Njoto Bisono</i>	
Author Index	363

Preface

ICSIIT 2017

This proceedings volume contains papers presented at the fifth International Conference on Soft Computing, Intelligent System and Information Technology (the 5th ICSIIT) held in Bali, Indonesia, 26-29 September 2017. Main theme of this international conference is “Building Intelligence through IoT and Big Data”, and it was organized and hosted by Informatics Engineering Department, Petra Christian University, Surabaya, Indonesia.

The Program Committee received 106 submissions for the conference from across Indonesia and around the world. After peer-review process by at least two reviewers per paper, 64 papers were accepted and included in the proceedings. The papers were divided into ten groups: Classification and Correlation Techniques, Feature Extraction and Image Recognition Methods, Algorithms for Intelligent Computation, Distributed Systems and Computer Networks, Mobile and Pervasive IoT Applications, Assessments of Integrated IS/IT, Simulation and Virtual Reality Applications, Smart Assistive Technologies, Smart Mobile Applications, Case Studies of Knowledge Discovery and Management.

We would like to thank all Program Committee members for their effort in providing high-quality reviews in a timely manner. We thank all the authors of submitted papers and the authors of selected papers for their collaboration in preparation of the final copy.

Compared to the previous ICSIIT conferences, the number of participants of the 5th ICSIIT 2017 is not only increasing, but also the research papers presented at the conference are improved both in quantity and quality. On behalf of the organizing committee, once again, we would like to thank all participants of this conference, who contributed enormously to the success of the conference.

We hope all of you enjoy reading this volume and that you will find it inspiring and stimulating for your research and future work.

Leo W. Santoso, *Petra Christian University, Indonesia*
ICSIIT 2017 General Chair

Henry N. Palit, *Petra Christian University, Indonesia*
ICSIIT 2017 Program Chair

Conference Organization

ICSIIT 2017

General Chairs

Leo W. Santoso, *Petra Christian University, Indonesia*

Rajkumar Buyya, *The University of Melbourne, Australia*

Program Chairs

Henry N. Palit, *Petra Christian University, Indonesia*

Chia-Hui Chang, *National Central University, Taiwan*

Steering Committee

Rolly Intan, *Petra Christian University, Indonesia*

Chi-Hung Chi, *CSIRO, Australia*

Rajkumar Buyya, *The University of Melbourne, Australia*

Program Committee

ICSIIT 2017

A.V. Senthil Kumar, *Hindusthan College of Arts and Science, India*
Achmad Nizar Hidayanto, *University of Indonesia, Indonesia*
Alexander Fridman, *Institute for Informatics and Mathematical Modelling, Russia*
Ashraf Elnagar, *University of Sharjah, United Arab Emirates*
Bernardo Nugroho Yahya, *Hankuk University of Foreign Studies, Korea*
Bor-Shen Lin, *National Taiwan University of Science and Technology, Taiwan*
Budi Bambang, *Indonesia*
Bruce Spencer, *University of New Brunswick, Canada*
Can Wang, *CSIRO, Australia*
Chen Ding, *Ryerson University, Canada*
Cherry G. Ballangan, *Australia*
Chuan-Kai Yang, *National Taiwan University of Science and Technology, Taiwan*
Edwin Lughofer, *Johannes Kepler University Linz, Austria*
Eric Holloway, *Baylor University, USA*
Erma Suryani, *Sepuluh Nopember Institute of Technology, Indonesia*
Felix Pasila, *Petra Christian University, Indonesia*
Han-You Jeong, *Pusan National University, Korea*
Hans Dulimarta, *Grand Valley State University, USA*
Hong Xie, *Murdoch University, Australia*
Ilung Pranata, *SAP, Australia*
Jantima Polpinij, *Maharakham University, Thailand*
Kassim S. Mwitondi, *Sheffield Hallam University, United Kingdom*
K.V. Krishna Kishore, *Vignan University, India*
Lee Chien Sing, *Sunway University, Malaysia*
Mahmoud Farfoura, *Royal Scientific Society, Jordan*
Masashi Emoto, *Meiji University, Japan*
Moeljono Widjaja, *Agency for the Assessment and Application of Technology, Indonesia*
Nai-Wei Lo, *National Taiwan University of Science and Technology, Taiwan*
Prantosh Kumar Paul, *Raiganj University, India*
Pujianto Yugopuspito, *Pelita Harapan University, Indonesia*
Raymond Kosala, *Binus University, Indonesia*
Rudy Setiono, *National University of Singapore, Singapore*
Sankar Kumar Pal, *Indian Statistical Institute, India*
Selpi, *Chalmers University of Technology, Sweden*
Sergio Camorlinga, *University of Winnipeg, Canada*
Shafiq Alam Burki, *University of Auckland, New Zealand*
Shan-Ling Pan, *University of New South Wales, Australia*
Simon Fong, *University of Macau, Macau*
Smarajit Bose, *Indian Statistical Institute, India*
Son Kuswadi, *Electronic Engineering Polytechnic Institute of Surabaya, Indonesia*
Suphamit Chittayasothorn, *King Mongkut's Institute of Technology Ladkrabang, Thailand*
Todorka Alexandrova, *Waseda University, Japan*
Tohari Ahmad, *Sepuluh Nopember Institute of Technology, Indonesia*
Vijay Varadharajan, *Macquarie University, Australia*
Wei Zhou, *CSIRO, Australia*
Wichian Chutimaskul, *King Mongkut's University of Technology Thonburi, Thailand*

Xiaojun Ye, *Tsinghua University, China*
Xiao Wu, *Southeast University, China*
Yanqing Liu, *Jiangxi University of Finance and Economics, China*
Yung-Chen Hung, *Soochow University, Taiwan*
Yunwei Zhao, *Tsinghua University, China*

Reviewers

ICSIIT 2017

A.V. Senthil Kumar, *Hindusthan College of Arts and Science, India*
Achmad Nizar Hidayanto, *University of Indonesia, Indonesia*
Alexander Fridman, *Institute for Informatics and Mathematical Modelling, Russia*
Ashraf Elnagar, *University of Sharjah, United Arab Emirates*
Bernardo Nugroho Yahya, *Hankuk University of Foreign Studies, Korea*
Bor-Shen Lin, *National Taiwan University of Science and Technology, Taiwan*
Budi Bambang, *Indonesia*
Bruce Spencer, *University of New Brunswick, Canada*
Can Wang, *CSIRO, Australia*
Chen Ding, *Ryerson University, Canada*
Cherry G. Ballangan, *Australia*
Chuan-Kai Yang, *National Taiwan University of Science and Technology, Taiwan*
Edwin Lughofer, *Johannes Kepler University Linz, Austria*
Eric Holloway, *Baylor University, USA*
Erma Suryani, *Sepuluh Nopember Institute of Technology, Indonesia*
Felix Pasila, *Petra Christian University, Indonesia*
Han-You Jeong, *Pusan National University, Korea*
Hans Dulimarta, *Grand Valley State University, USA*
Hong Xie, *Murdoch University, Australia*
Ilung Pranata, *SAP, Australia*
Jantima Polpinij, *Maharakham University, Thailand*
Kassim S. Mwitondi, *Sheffield Hallam University, United Kingdom*
K.V. Krishna Kishore, *Vignan University, India*
Lee Chien Sing, *Sunway University, Malaysia*
Mahmoud Farfoura, *Royal Scientific Society, Jordan*
Masashi Emoto, *Meiji University, Japan*
Moeljono Widjaja, *Agency for the Assessment and Application of Technology, Indonesia*
Nai-Wei Lo, *National Taiwan University of Science and Technology, Taiwan*
Prantosh Kumar Paul, *Raiganj University, India*
Pujianto Yugopuspito, *Pelita Harapan University, Indonesia*
Raymond Kosala, *Binus University, Indonesia*
Rudy Setiono, *National University of Singapore, Singapore*
Sankar Kumar Pal, *Indian Statistical Institute, India*
Selpi, *Chalmers University of Technology, Sweden*
Sergio Camorlinga, *University of Winnipeg, Canada*
Shafiq Alam Burki, *University of Auckland, New Zealand*
Shan-Ling Pan, *University of New South Wales, Australia*
Simon Fong, *University of Macau, Macau*
Smarajit Bose, *Indian Statistical Institute, India*
Son Kuswadi, *Electronic Engineering Polytechnic Institute of Surabaya, Indonesia*
Suphamit Chittayasothorn, *King Mongkut's Institute of Technology Ladkrabang, Thailand*
Todorka Alexandrova, *Waseda University, Japan*
Tohari Ahmad, *Sepuluh Nopember Institute of Technology, Indonesia*
Vijay Varadharajan, *Macquarie University, Australia*
Wei Zhou, *CSIRO, Australia*
Wichian Chutimaskul, *King Mongkut's University of Technology Thonburi, Thailand*

Xiaojun Ye, *Tsinghua University, China*
Xiao Wu, *Southeast University, China*
Yanqing Liu, *Jiangxi University of Finance and Economics, China*
Yung-Chen Hung, *Soochow University, Taiwan*
Yunwei Zhao, *Tsinghua University, China*

Human Heart Rate Detection Application

Semuil Tjiharjadi, Aufar Fajar
Computer System Engineering Department
Maranatha Christian University
Bandung, Indonesia
semuiltj@gmail.com

Abstract—Modern daily activities make some people have difficulty to care about his health. Urban air pollution, work pressure, and irregular diet increase the risk of such a person to become infected. In fact, some of the diseases would not cause any symptoms prior to severe ones. One of them is the coronary heart disease. According to a study conducted by the WHO (World Health Organization), in 2030 an estimated 23 million lives lost each year from cardiovascular disease. This value will continue to grow if no proper solution is found. Internet of Things (IoT) technology developments allow humans to control a variety of high-tech equipment in our daily lives. One of these is the ease of checking health using gadgets, either a phone, tablet or laptop. This paper describes the use of IoT technology for measuring the human heart rate that can be monitored using the gadget. As the result of this application, people can easily monitor their heart rate.

Keywords—IoT; gadget; heart rate; measurement

I. INTRODUCTION

Based on information taken from the site of the World Health Organization (WHO), it was estimated that in 2008 approximately 17.3 million people died from cardiovascular disease. Eighty percent mortality from the disease occurred in countries with low to medium incomes (low and middle-income countries). Estimated mortality rate was then calculated to obtain the data that by 2030 more than 23 million people will die each year from cardiovascular disease [1].

In 2005, an organization in the United States that is part of the ministry of health and community services, CDC (Centers for Disease Control and Prevention), conducted a survey in 2005. Ninety-two percent of respondents recognized chest pain as a symptom of a heart attack. However, only 27% of them were aware of all the symptoms and knew how to make an emergency call when someone was having a heart attack. Approximately 47% of sudden cardiac deaths occurred outside the hospital. It shows that many people with early symptoms of heart attack are not acting responsibly. The key to avoid death from a heart attack is just to recognize the early symptoms of a heart attack [2].

Based on the facts that there are many mobile phone users in Indonesia and there are problems regarding the indifference of many people about heart health, this paper presents a smartphone app that can measure heart rate for users. The application was created on Windows Phone 8.0 operating system. Fig. 1 shows block diagram of human heart rate detection system. The application connects to

additional external devices with the communication media such as Bluetooth. External devices work to record the heartbeat of the fingers in any particular period by utilizing an infrared sensor [3]. The heart rate data are then processed by a microcontroller and then sent to the smartphone in question. The application's role is to infer the level of heart rate of the user [4]. In January 2014, there was 112% of the Indonesian population active mobile subscription. This indicates that almost the entire population of Indonesia already has a cell phone. Users interact with smartphones through applications that have a GUI (Graphical User Interface), entertainment apps, multimedia apps, productivity apps, news and weather apps.

II. DESIGN

This system includes the involvement of hardware and software in the form of a mobile application. Hardware acts as the input system. That is, in this section there are sensors that can detect the environment. Meanwhile, the mobile application serves as the system output to the user. Both components are connected via the Bluetooth wireless communication.




Figure 1. Block diagram of human heart rate detection system

On the hardware side, there are three main components, namely component processors, sensors, and a Bluetooth module. Microcontroller ATmega 16 works as a processor, which will execute any commands that exist in the hardware. The sensor embedded in the system is an infrared sensor that consists of an IR LED and photodiode. The sensor is useful for detecting the heartbeat of the user's finger. The raw data that have been received by the sensor are then processed by a microcontroller. The processed data are then sent wirelessly to the mobile application via a Bluetooth connection. The application will process and conclude the data for later display. The application works on smartphones running on Windows Phone 8.0 operating system [5].

A. External hardware Design

The design of the system hardware for detecting human heart rate based on Windows Phone 8.0 operating system using the infrared sensor includes:

1. Design of the minimum system microcontroller AT Mega 16
2. Design of the infrared sensor
3. Design of the Bluetooth module

This system combines hardware power supply circuit and the three sub-systems that have been mentioned earlier. Sensor and Bluetooth modules incorporated in the minimum system form a larger system as shown in Fig. 2. The figure explains the schematic diagram of the hardware, but the hardware realization is printed in the form of PCB. Users simply press the switch to turn on or off the device. The setting and synchronization is done via Bluetooth windows phone. This hardware has dimensions of $11.6 \text{ cm} \times 9 \text{ cm} \times 10 \text{ cm}$ making it possible to carry around (portable).

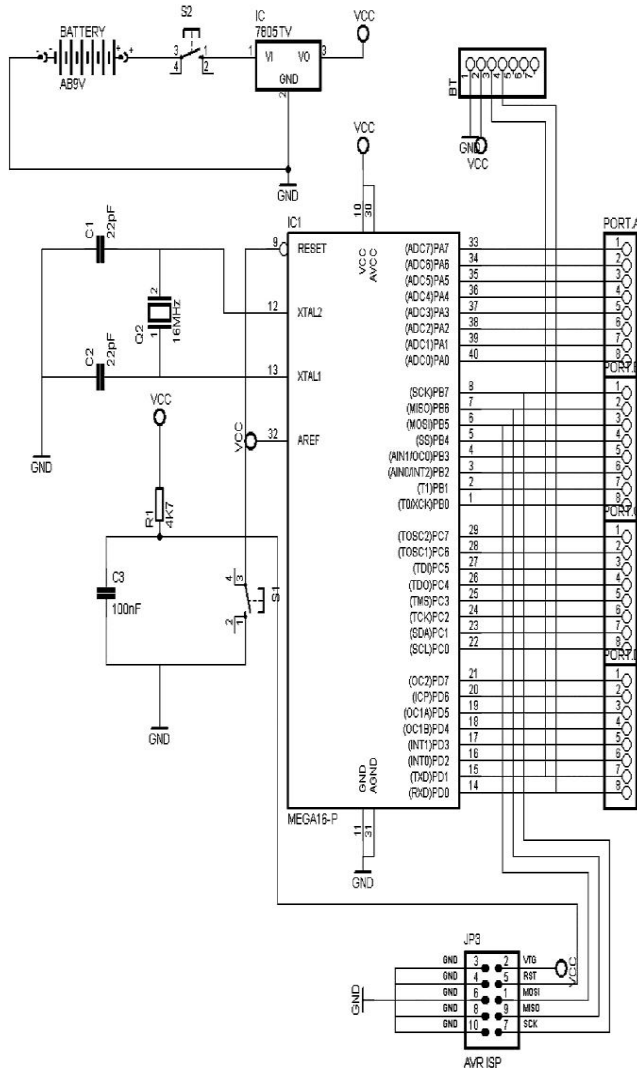


Figure 2. Schematic of hardware circuit diagrams

1) Design of the minimum system microcontroller AT Mega 16

The minimum system microcontroller ATmega16 is required in order to function properly. Therefore, the minimum system design is applied and become the primary

circuit on additional hardware. A 16MHz crystal oscillator, two 22pF capacitors, a capacitor 10nF, a 4.7 K Ω resistor, and a push-button arranged in such a manner as shown in Fig. 2. Pins VCC, AVCC and AREF connected to the source voltage to the microcontroller are active as well as ADC features. ADC feature is enabled because it will be used by the microcontroller to process the analog data received from the sensors. GND and AGND pins are connected to ground [6].

2) Design of the infrared sensor

Infrared sensor consists of an IR LED and a photodiode arranged side by side. Infrared LED circuit is quite simple, by connecting the anode and the cathode to VCC and ground. A 330 Ω resistor is included in it to prevent the reception of too large current to LEDs. Another thing with photodiode circuit is a little more complicated. Walking photodiode cathode is connected to VCC and anode to ground (photodiode reverse bias assembled using the relationship). Besides connected to VCC, cathode foot is also connected to the 40th pin (Pin A0) of AT Mega microcontroller 16. This pin serves as the microcontroller ADC channel used to receive data from the sensors. In the circuit there is also a 10 K Ω resistor providing the same functions as the resistor in the circuit of the IR LEDs. The series of infrared sensors on the detection system of human heart rate can be seen in Fig. 3.

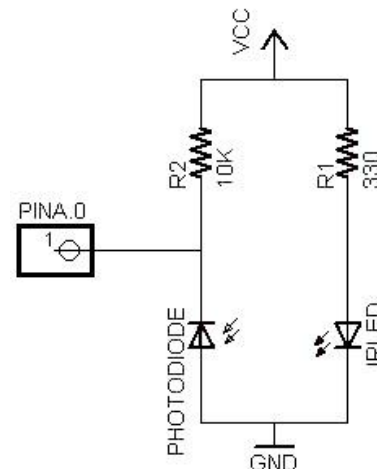


Figure 3. Infra-red sensor circuit

3) Design of the Bluetooth module

Communication between hardware with mobile applications is done wirelessly (wireless) using Bluetooth technology. Bluetooth module used in this system is the DFRobot V3 type. There are 7 feet owned by the Bluetooth module. However, only 4 feet are used by the system. The legs are VCC, GND, TX and RX. Walking VCC and GND are connected to the voltage sources to activate the Bluetooth module. Walking TX is connected to pin 14 (RXD) and RX leg connected to the pin 15 (TXD) of microcontroller. Both pins are responsible for delivering the data to be sent or received by the microcontroller via Bluetooth module. Bluetooth module circuit is shown in Fig. 4.

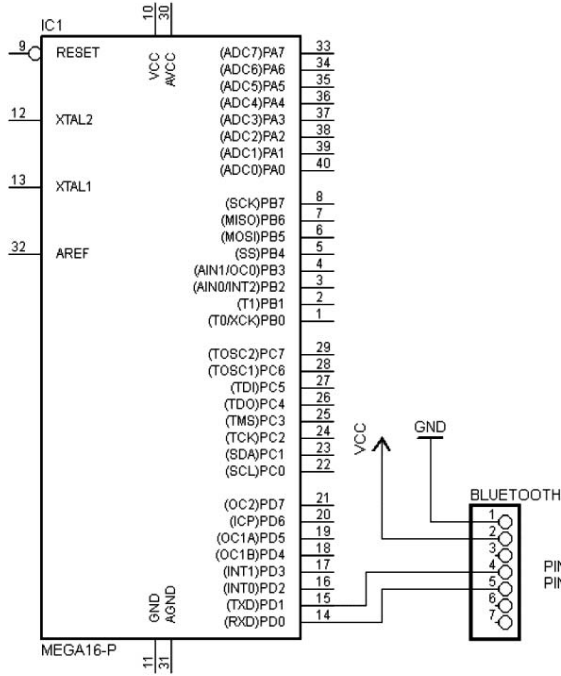


Figure 4. Bluetooth module circuit

There are several similar research like paper of Mallick and Patro (Heart Rate Monitoring System Using Finger Tip through Arduino Uno and Processing Software) [7] and Choi and Guterrez-Ozune's paper (Using Heart Rate Monitors to Detect Mental Stress) [8].

Flow of the hardware program begins with the initialization of Analog-to-Digital Converter (ADC). Initialization is intended to enable ADC features provided by CodeVision AVR. In addition to ADC, another feature used is USART. Therefore, the initialization process is also made to the USART. In this stage, both USART transmitter and receiver are enabled, because the hardware is sending and receiving data from the application. The next stage is to initialize the port A as an input. Port A is set as an input for a sensor mounted on the port A. The sensors will provide data input to the microcontroller. A port initialization as the input is done via the command `DDRA = 0x00`. The rest of ports act as output because they will provide the data output of the microcontroller. For example, data to be sent by the Bluetooth module. The command to initialize the port as output is `DDRi = 0xFF` (i = Name of the port).

There are several variables that are made in the program's hardware. Variables with the names `initVal`, `finalVal`, and `range`, have an integer data type (`int`). While another variable with the name `transmitChar` has a character data type (`char`). These variables will be used to store certain values. `FinalVal` variable has an initial value of 0 (zero), while the other variables are set to have an initial value. Then, the program flow is followed by reading from the sensor port A pin-0. The data obtained from the sensor are analog data, so they need to be converted by the ADC into digital data, so they can be processed. Then, the digital value is saved in variable

`initVal`. A formula is used to process the `finalVal` and `initVal` value, the formula is:

$$range = [finalVal - initVal] \quad (1)$$

This formula has a function to get the difference's absolute value between `finalVal` and `initVal`. The result of the calculation is then set as the variable `range`'s value. If the `range`'s value ranges between 3 and 7, then invoke sub-routines `SendData`. If the requirements are not met, then proceed to the next command line. Commands from the sensor readings to call subroutines are in the loop forever. Accordingly, all such orders will continue to be repeated. Description of the program flow is summarized in the flow diagram in Fig. 5 [9].

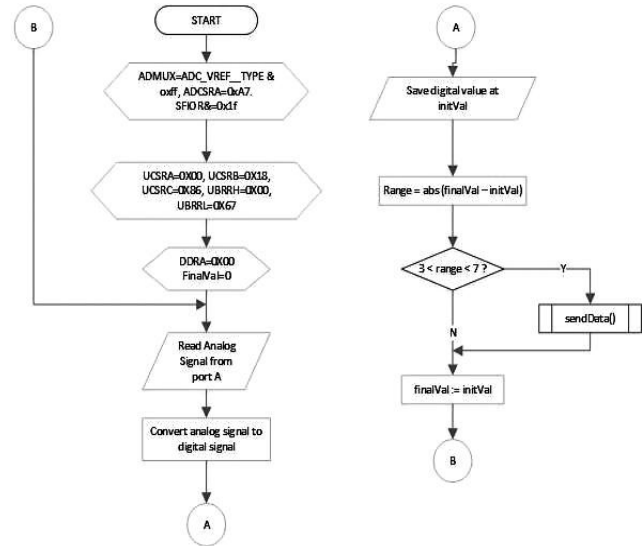


Figure 5. System flowchart

B. Mobile Application Design

Software system design for detecting human heart rate based on Windows Phone 8.0 operating system using the infrared sensor is divided into two parts. The first part is a program to run additional hardware. The second part is a mobile application that operates on a Windows phone. The program planted on a microcontroller is fabricated using C language programming, and the software used is CodeVision AVR. Another thing is that the mobile application is built using XAML and C#. XAML language is used to declare an application's user interface. Meanwhile, C# is used as the code behind. Programming software used to build the mobile applications is visual studio express for windows phone.

The program on the microcontroller is intended for reading the sensor data and sending data via bluetooth. The mobile application consists of 2 pages which display the input of user data and page output. The data entry page is called "MainPage.xaml". This page is tasked to retrieve the data for age, sex, and activity. Although, there are only two columns, i.e., first name and last name, we aim to develop further towards a database. The output page is called "HeartbeatPivot.xaml" which allows you to display data from the application process. Data shown are gender, age,

activity, heart rate, maximum heart rate, and the concluded heartbeat condition. There is a timer, which indirectly instructs users to keep putting the finger on the sensor during run time. This application has several methods that are declared and called on both pages. In the manufacturing process, these applications directly simulated in the Windows Phone 8.0 operating system.

C. Mainpage Interface

The mainpage has 3 textblocks, 4 radio buttons, an application bar button, and some textblock as shown in Fig. 6. Elements of this interface serve for the user to enter data. Columns first name and last name will not affect the processing of the data by the application. The second column is intended for further development of the Heartbeat application.

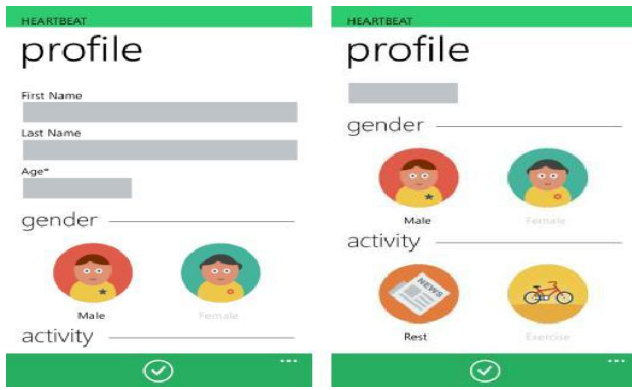


Figure 6. Main page interface

Users must enter data for age, sex, and activity being carried out via this page. For the age data, user gives input by touching the age column. Then the on-screen keyboard will appear and the user can type a number of age. As for the data gender and activity, user simply touches one choice of several options available. Male gender selection is symbolized by the image of a male and female gender by the image of a woman. For the activity choices, leisure activity is symbolized by the image of newspaper and strenuous activity by a bike's picture.

D. Heart rate Detection System

Fig. 7 shows the flowchart of main page, and a schematic diagram of the entire system is shown in Fig. 8. The system is divided into two parts, namely hardware and mobile applications. The hardware includes a microcontroller, sensors, power supply, Bluetooth modules, and other electronic components incorporated in an electrical circuit. The hardware will transmit heart rate data on the application to be processed. The mobile application will calculate the number of beeps and infer normality of the heart rate of the user.

The device is composed of a variety of electronic components and integrated circuits incorporated in a PCB (Printed Circuit Board). PCB is packaged in a beam, with the dimensions of 11.6 cm × 9 cm × 10 cm. The beam has two compartments: the battery space and PCB space. Hardware is powered by a 9V battery that is located at the bottom of the

beam. A power button is located on the upper side, while the sensor is on the front left side. Sensors are placed in a cavity to minimize interference due to ambient light system. The device's appearance, beyond the hardware, is shown in Fig. 9.

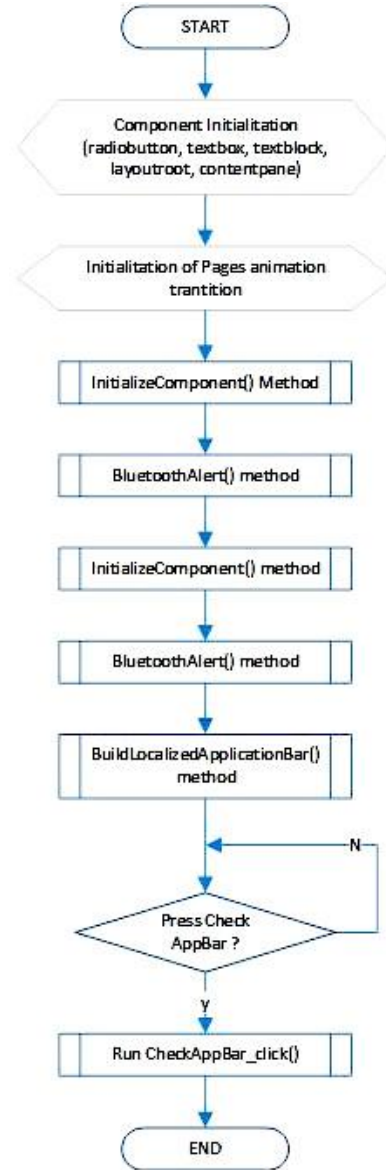


Figure 7. Main page flowchart

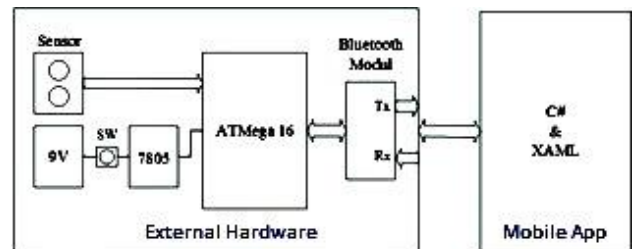


Figure 8. Heart rate detection system

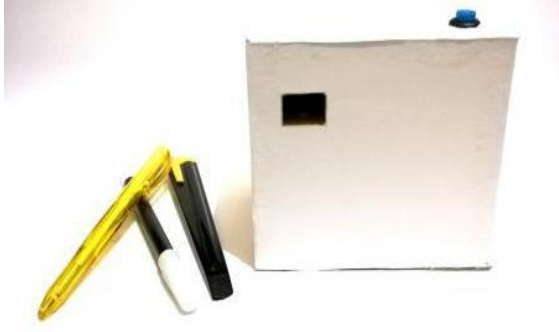


Figure 9. External hardware

Users should turn on additional hardware by pressing the blue button before the application is executed. Then, to start the recording process, place your index finger on the sensor. Then, Bluetooth will send data to the application to be processed. All activities are governed by the microcontroller ATmega 16 embedded in the PCB measuring 12.5 cm × 7.5 cm. Physical appearance of the PCB is shown in Fig. 10. The sensor has its own PCB (separated from the main PCB). This is because the sensor must be conditioned to clamp a user's finger. Thus, two other PCBs are created for IR LED and photodiode. The IR LED's PCB is placed at the bottom of the cavity (i.e., LED is attached to the finger), and the photodiode's PCB is on top of the finger (photodiode attached to the nail).

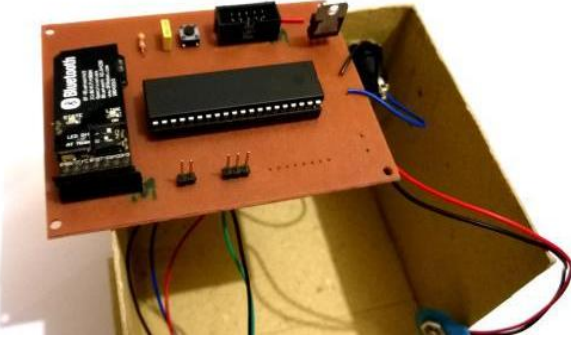


Figure 10. Main PCB

III. TESTING

TABLE I. USERS IDENTITY

Input Data			Output Data						
Age	Sex	Activity	HR	Max HR	Age	Sex	Activity	Status Bar	Animation
20	Man	Rest	×	200	20	Male	Rest	Device is ready	×
35	Man	Exercise	×	200	35	Male	Exercise	Device is ready	×
20	Woman	Rest	×	189	20	Female	Rest	Device is ready	×
35	Woman	Exercise	×	189	35	Female	Exercise	Device is ready	×

*HR = Heart Rate

TABLE II. USERS TESTS

Input Data					Output Data				
Age	Sex	Activity	HR	Max HR	Age	Sex	Activity	Status Bar	Animation
20	Man	Rest	×	200	20	Male	Rest	Recording Your Heartbeat	MyAnimatedEllipse, MyAnimatedLittleEllipse, txbRateOut
35	Man	Exercise	×	200	35	Male	Exercise	Recording Your Heartbeat	MyAnimatedEllipse, MyAnimatedLittleEllipse, txbRateOut
20	Woman	Rest	×	189	20	Female	Rest	Recording Your Heartbeat	MyAnimatedEllipse, MyAnimatedLittleEllipse, txbRateOut
35	Woman	Exercise	×	189	35	Female	Exercise	Recording Your Heartbeat	MyAnimatedEllipse, MyAnimatedLittleEllipse, txbRateOut

TABLE III. CALIBRATION TEST

Testing	Real Heart rate	App Heart rate	Different	Real Status	App Status	Conclusion	
						HR	Result
1	80	72	-8	Normal	Normal	False	True
2	72	69	-3	Normal	Normal	False	True
3	72	61	-11	Normal	Normal	False	True
4	76	80	+4	Normal	Normal	False	True
5	72	87	+15	Normal	Normal	False	True
6	80	94	+14	Normal	Normal	False	True
7	72	87	+15	Normal	Normal	False	True
8	76	65	-11	Normal	Normal	False	True
9	76	47	-29	Normal	Low	False	False
10	76	69	-7	Normal	Normal	False	True
11	72	83	+11	Normal	Normal	False	True
12	76	120	+44	Normal	High	False	False
13	84	98	+14	Normal	Normal	False	True
14	76	98	+22	Normal	Normal	False	True
15	76	87	+11	Normal	Normal	False	True
16	72	61	-11	Normal	Normal	False	True
17	72	91	+19	Normal	Normal	False	True
18	84	120	+36	Normal	High	False	False
19	76	50	-26	Normal	Low	False	False
20	72	72	0	Normal	Normal	True	True
21	76	69	-7	Normal	Normal	False	True
22	76	58	-18	Normal	Normal	False	True
23	76	65	-11	Normal	Normal	False	True
24	72	61	-11	Normal	Normal	False	True
25	72	65	-7	Normal	Normal	False	True
26	84	83	-1	Normal	Normal	False	True
27	72	80	-8	Normal	Normal	False	True
28	72	69	-3	Normal	Normal	False	True
29	72	72	0	Normal	Normal	True	True
30	76	83	7	Normal	Normal	False	True

Testing condition:

The value of the calibration used is 0.91. This value is used to minimize the difference between application pulse and normal pulse.

Percentage Error:

$$\sum \text{difference} = 384$$

$$\text{Difference Average} = \frac{\sum \text{difference}}{30} = 12.8$$

$$\text{Error} = \frac{4}{30} \times 100\% = 13.33\%$$

The pulse and decision facts are measured by calculating the heart rate manually by pressing a finger on the body to feel the pulse.

IV. CONCLUSION

Application for detecting human heart rate based on Windows Phone 8.0 operating system using the infrared sensor was successfully realized. The applications were built using XAML and C# languages with Visual Studio Express for Windows Phone.

Additional hardware was successfully realized in the form of Printed Circuit Board (PCB) and packaged in blocks. The hardware is programmed using C language on AVR CodeVision program. No problems were found relating to the percentage of errors on certain aspects. The error was most likely caused by a mismatch of sensors. However, this can be minimized by providing a calibration value.

Additional hardware with mobile applications can be connected with a Bluetooth connection. The hardware is able to send data, and the application is able to receive data from the hardware properly

REFERENCES

- [1] J.R. Hampton, *Dasar-Dasar EKG [The ECG Made Easy]*, 4th ed., Jakarta (Indonesia): EGC Penerbit Buku Kedokteran, 1996.
- [2] R.C. Little, *Physiology of the Heart and Circulation*, 2nd ed., Year Book Medical Publishers, 1981.
- [3] E.C. Pearce, *Anatomi dan Fisiologi untuk Paramedis [Anatomy and Physiology for Nurses]*, Jakarta (Indonesia): Gramedia, 1979.
- [4] G.J. Tortora and M.Nielsen, *Principles of Human Anatomy*, 13th ed., Wiley, 2014.
- [5] A.P. Malvino, *Prinsip-Prinsip Elektronik [Electronic Principles]*, 2nd ed., Jakarta (Indonesia): Erlangga, 1994.
- [6] P.B. Zbar, A.P. Malvino, and M.A. Miller, *Basic Electronics: A Text-Lab Manual*, 7th ed., New York (NY, USA): McGraw-Hill, 1994.
- [7] B. Mallick and A.K. Patro, "Heart Rate Monitoring System Using Finger Tip through Arduino and Processing Software," *Int. J. Science, Engineering and Technology Research (IJSETR)*, vol. 5, no. 1, pp. 84–89, Jan. 2016.
- [8] J. Choi and R. Gutierrez-Osuna, "Using Heart Rate Monitors to Detect Mental Stress," *Proc. 6th Int. Workshop on Wearable and Implantable Body Sensor Networks (BSN)*, Berkeley (CA, USA), Jun. 2009, pp. 219–223, doi: 10.1109/BSN.2009.13.
- [9] A. Troelsen, *Pro C# 2005 and the .NET 2.0 Platform*, Apress, 2005, doi: 10.1007/978-1-4302-0060-4.