

LAMPIRAN 1


INSTALASI IIS

Lampiran 1 Instalasi IIS

IIS berperan seperti halnya PWS dalam Windows 98 yaitu sebagai server web local. Anda dapat menemukan IIS pada CD original Windows XP Pro atau Windows 2000. Atau dengan cara mendownload melalui alamat www.microsoft.com


Dibawah ini langkah-langkah instalasi IIS menggunakan Windows XP.

1. Masukkan CD Windows XP Pro atau akses langsung menu Add/Remove Programs dalam kotak dialog Control Panel.

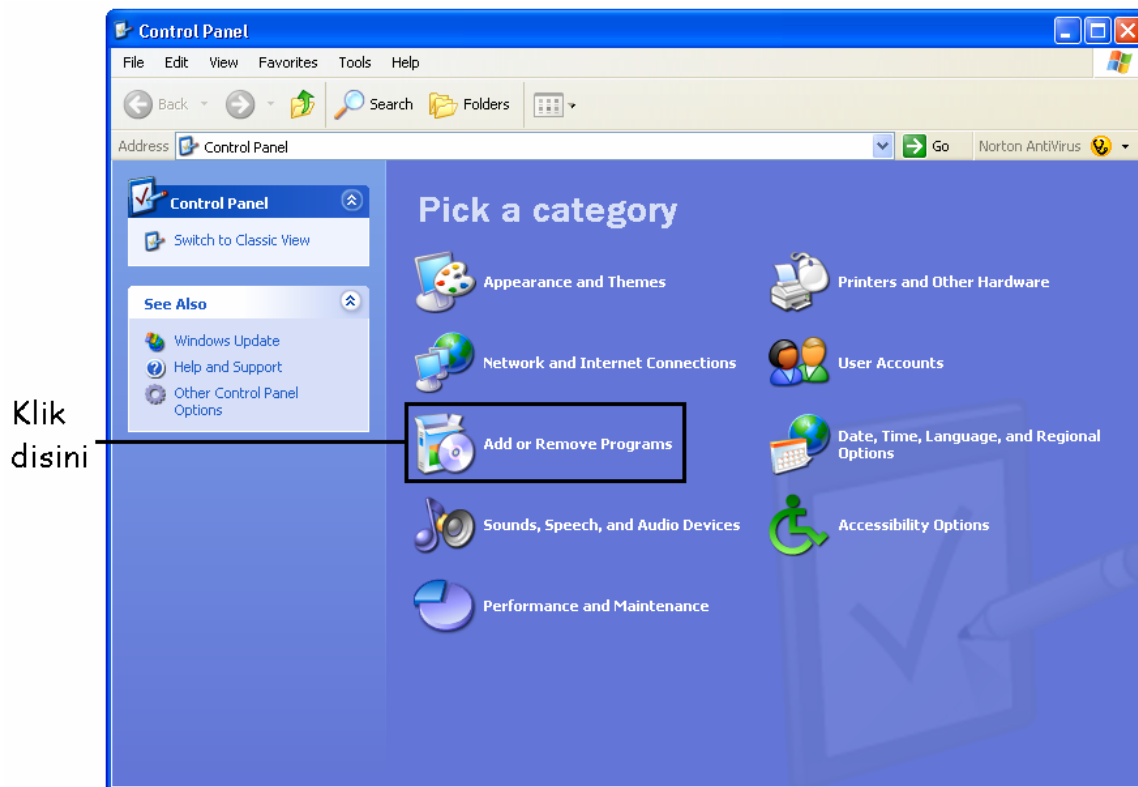


Gambar 1 Kotak dialog Control Panel

2. Akan muncul kotak dialog **Add or Remove Programs** seperti **Gambar 2**. Selanjutnya klik menu **Add/Remove Windows Component**.
3. Anda akan dibawa ke jendela **Windows Component Wizard** seperti **Gambar 3**.

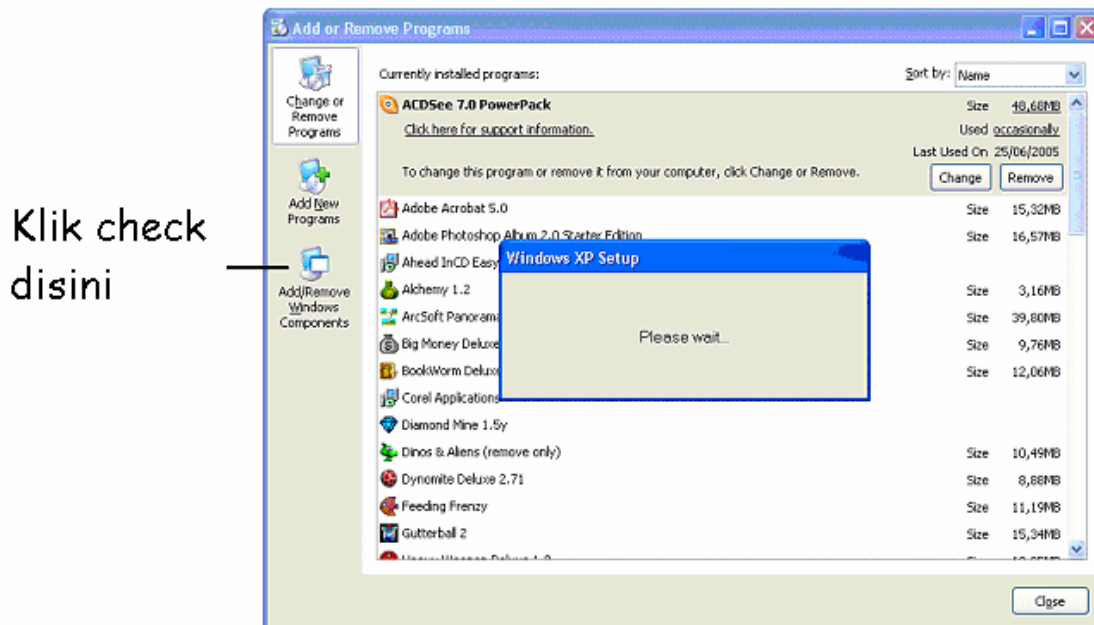


Gambar 2 Kotak dialog Add or Remove Programs

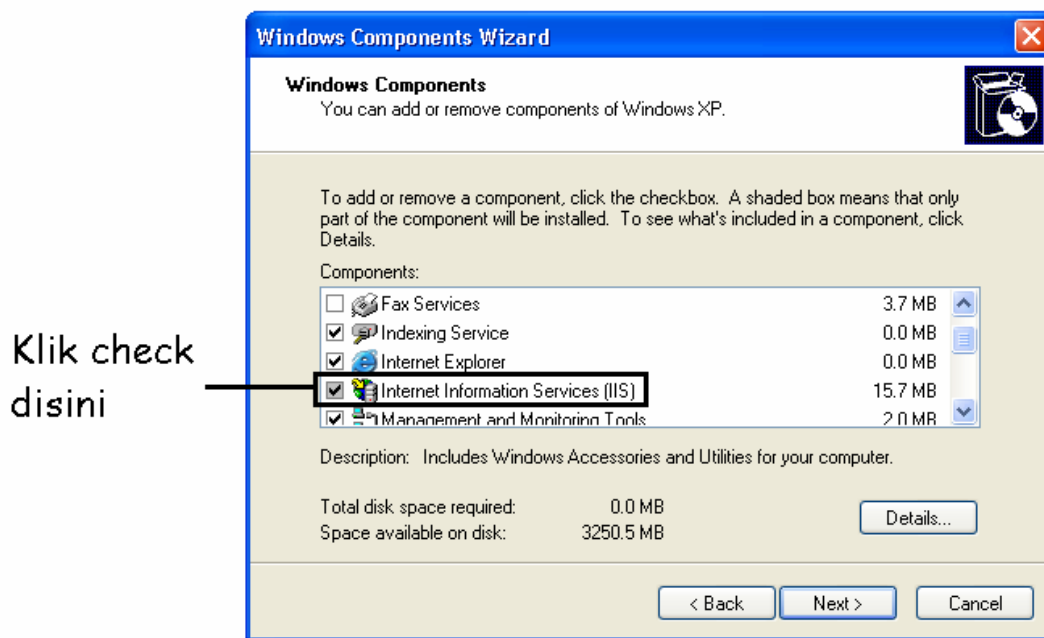

Gambar 3 Jendela Windows Component Wizard

4. Klik checkbox Internet Information Service (IIS) lalu klik tombol Next.
5. Proses Instalasi akan dijalankan seperti yang diperlihatkan pada gambar 4.

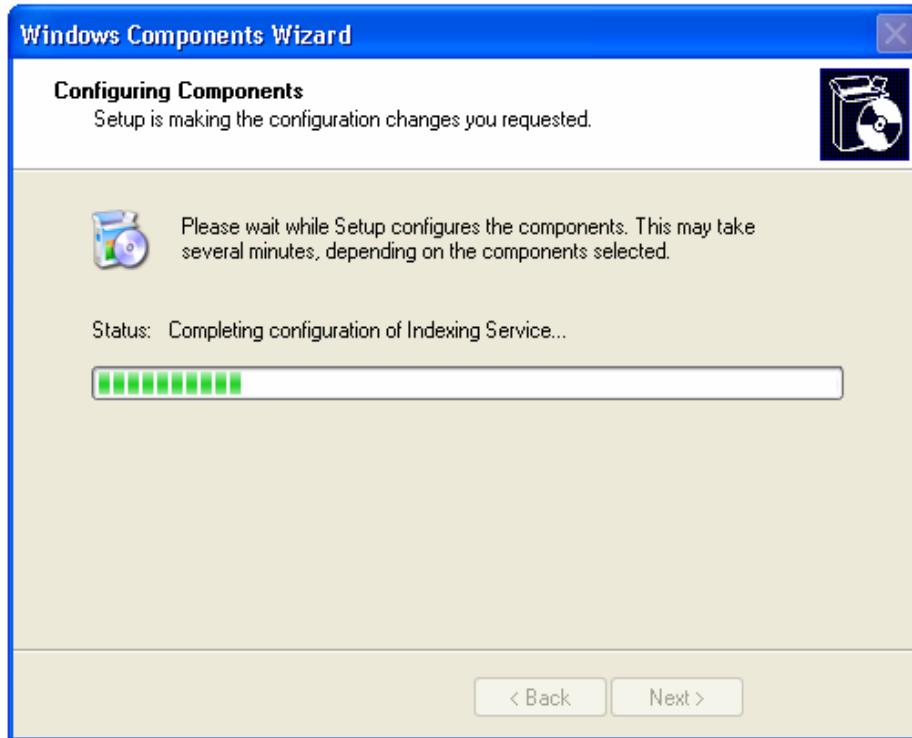

Gambar 4 Proses instalasi sedang dijalankan


6. Tunggu beberapa saat sampai proses instalasi selesai. Akan muncul kotak dialog seperti gambar 5.



Gambar 5 Proses instalasi selesai

7. Klik tombol **Finish** mengakhiri proses instalasi.

Setelah proses instalasi selesai, Anda akan mendapatkan folder baru C:\Inetpub di dalam komputer Anda.

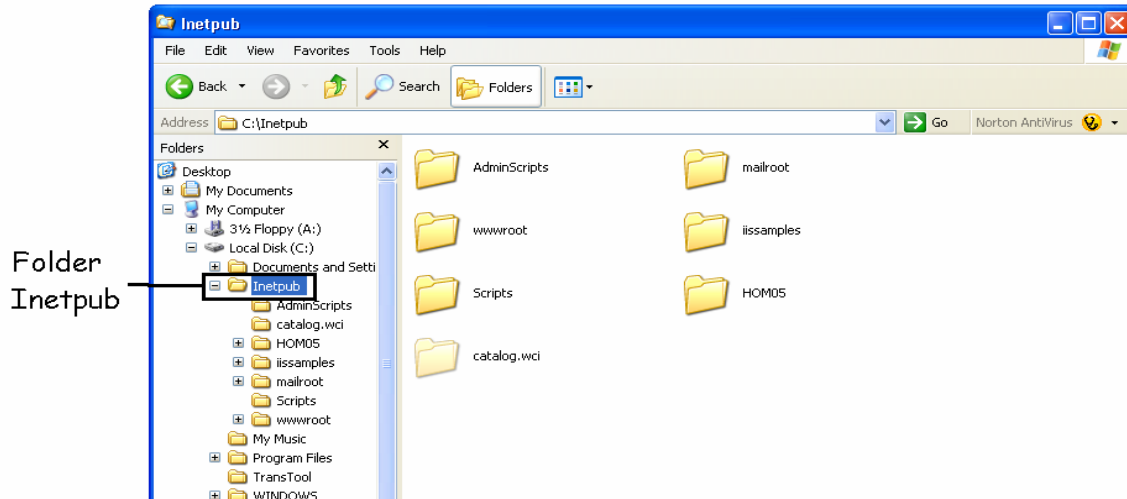

Gambar 6 Folder baru setelah instalasi IIS selesai

Untuk menguji server Web sudah berfungsi atau belum caranya adalah :

1. Buka browser Anda, misalnya Internet Explorer atau Nestcape Navigator.
2. Ketikkan url <http://localhost/localstart>.
3. Bila server web Anda siap digunakan, Anda akan menjumpai tampilan seperti gambar 7.



Gambar 7 Menguji server Web Lokal

Lampiran 2. Listing Program

conn_Mydatabase.asp

```
<%  
' FileName="Connection_odbc_conn_dsn.htm"  
' Type="ADO"  
' DesigntimeType="ADO"  
' HTTP="false"  
' Catalog=""  
' Schema=""  
Dim MM_conn_mydatabase_STRING  
MM_conn_mydatabase_STRING = "dsn=Mydatabase;"  
>%
```

Deleteuser.asp

```
<% @LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>  
<!--#include file="Connections/conn_mydatabase.asp" -->  
<!-- #include file="home1.asp" -->  
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"  
"http://www.w3.org/TR/html4/loose.dtd">  
<html>  
<head>  
<title>Untitled Document</title>  
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">  
</head>  
<% if session("MM_Username") = empty then %>  
<% response.Redirect "nologin.asp" %>  
<% ELSE %>  
<% if session("posisi") <> "admin" then %>  
<% response.Redirect "noadmin.asp" %>  
<% ELSE %>  
<%  
' *** Edit Operations: declare variables  
Dim MM_editAction  
Dim MM_abortEdit  
Dim MM_editQuery  
Dim MM_editCmd  
Dim MM_editConnection  
Dim MM_editTable
```

```
Dim MM_editRedirectUrl
Dim MM_editColumn
Dim MM_recordId
Dim MM_fieldsStr
Dim MM_columnsStr
Dim MM_fields
Dim MM_columns
Dim MM_typeArray
Dim MM_formVal
Dim MM_delim
Dim MM_altVal
Dim MM_emptyVal
Dim MM_i
MM_editAction = CStr(Request.ServerVariables("SCRIPT_NAME"))
If (Request.QueryString <> "") Then
    MM_editAction = MM_editAction & "?" &
Server.HTMLEncode(Request.QueryString)
End If
' boolean to abort record edit
MM_abortEdit = false
' query string to execute
MM_editQuery = ""
%>
<%
' *** Delete Record: declare variables
if (CStr(Request("MM_delete")) = "delete" And CStr(Request("MM_recordId")) <> "")
Then
    MM_editConnection = MM_conn_mydatabase_STRING
    MM_editTable = "userdatabase"
    MM_editColumn = "Nama"
    MM_recordId = "" + Request.Form("MM_recordId") + ""
    MM_editRedirectUrl = "viewuser.asp"
    ' append the query string to the redirect URL
    If (MM_editRedirectUrl <> "" And Request.QueryString <> "") Then
        If (InStr(1, MM_editRedirectUrl, "?", vbTextCompare) = 0 And Request.QueryString
<> "") Then
            MM_editRedirectUrl = MM_editRedirectUrl & "?" & Request.QueryString
        Else
            MM_editRedirectUrl = MM_editRedirectUrl & "&" & Request.QueryString
        End If
    End If
End If
End If
%>
<%
' *** Delete Record: construct a sql delete statement and execute it
If (CStr(Request("MM_delete")) <> "" And CStr(Request("MM_recordId")) <> "") Then
```

```
' create the sql delete statement
MM_editQuery = "delete from " & MM_editTable & " where " & MM_editColumn & "
= " & MM_recordId
If (Not MM_abortEdit) Then
' execute the delete
Set MM_editCmd = Server.CreateObject("ADODB.Command")
MM_editCmd.ActiveConnection = MM_editConnection
MM_editCmd.CommandText = MM_editQuery
MM_editCmd.Execute
MM_editCmd.ActiveConnection.Close
If (MM_editRedirectUrl <> "") Then
Response.Redirect(MM_editRedirectUrl)
End If
End If
End If
%>
<%
Dim rs_user__MMColParam
rs_user__MMColParam = "1"
If (Request.QueryString("Nama") <> "") Then
rs_user__MMColParam = Request.QueryString("Nama")
End If
%>
<%
Dim rs_user
Dim rs_user_numRows
Set rs_user = Server.CreateObject("ADODB.Recordset")
rs_user.ActiveConnection = MM_conn_mydatabase_STRING
rs_user.Source = "SELECT * FROM userdatabase WHERE Nama = '" +
Replace(rs_user__MMColParam, "'", "''") + "'"
rs_user.CursorType = 0
rs_user.CursorLocation = 2
rs_user.LockType = 1
rs_user.Open()
rs_user_numRows = 0
%>
<body>
<p>" width="120" height="160"
hspace="20" align="left"></p>
<table width="200" border="0">
<tr>
<th scope="row">FID :</th>
<td><p><%=rs_user.Fields.Item("FID").Value%></p></td>
</tr>
<tr>
<th scope="row">Nama : </th>
```



```
<td><%=rs_user.Fields.Item("Nama").Value%></td>
</tr>
<tr>
<th scope="row">Password: </th>
<td><%=rs_user.Fields.Item("Password").Value%></td>
</tr>
<tr>
<th scope="row">Lokasi :</th>
<td><%=rs_user.Fields.Item("Lokasi").Value%></td>
</tr>
<tr>
<th scope="row">Level :</th>
<td><%=rs_user.Fields.Item("Posisi").Value%></td>
</tr>
<tr>
<th scope="row">Credit :</th>
<td><%=rs_user.Fields.Item("Credit").Value%></td>
</tr>
<tr>
<th scope="row">Photo :</th>
<td><%=rs_user.Fields.Item("Photo").Value%></td>
</tr>
<tr>
<th scope="row">&nbsp;</th>
<td><form action="<%=MM_editAction%>" method="POST" name="delete"
id="delete">
<input name="delete" type="submit" id="delete" value="delete">
<input type="hidden" name="MM_delete" value="delete">
<input type="hidden" name="MM_recordId" value="<%=
rs_user.Fields.Item("Nama").Value %>">
</form></td>
</tr>
</table>
<%
rs_user.Close()
Set rs_user = Nothing
%>
<% end if %>
<% end if %>
</body>
</html>
```

DetailFilm.asp

```
<% @LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!--#include file="Connections/conn_mydatabase.asp" -->
<%
Dim film__MMColParam
film__MMColParam = "1"
If (Request.QueryString("Nmr") <> "") Then
    film__MMColParam = Request.QueryString("Nmr")
End If
%>
<%
Dim film
Dim film_numRows
Set film = Server.CreateObject("ADODB.Recordset")
film.ActiveConnection = MM_conn_mydatabase_STRING
film.Source = "SELECT * FROM filmdatabase WHERE Nmr = " +
Replace(film__MMColParam, "'", "'") + ""
film.CursorType = 0
film.CursorLocation = 2
film.LockType = 1
film.Open()
film_numRows = 0
%>
<%
Dim MM_paramName
%>
<%
' *** Go To Record and Move To Record: create strings for maintaining URL and Form
parameters
Dim MM_keepNone
Dim MM_keepURL
Dim MM_keepForm
Dim MM_keepBoth
Dim MM_removeList
Dim MM_item
Dim MM_nextItem
' create the list of parameters which should not be maintained
MM_removeList = "&index="
If (MM_paramName <> "") Then
    MM_removeList = MM_removeList & "&" & MM_paramName & "="
End If
MM_keepURL=""
MM_keepForm=""
MM_keepBoth=""
MM_keepNone=""
```

```
' add the URL parameters to the MM_keepURL string
For Each MM_item In Request.QueryString
  MM_nextItem = "&" & MM_item & "="
  If (InStr(1,MM_removeList,MM_nextItem,1) = 0) Then
    MM_keepURL = MM_keepURL & MM_nextItem &
Server.URLEncode(Request.QueryString(MM_item))
  End If
Next
' add the Form variables to the MM_keepForm string
For Each MM_item In Request.Form
  MM_nextItem = "&" & MM_item & "="
  If (InStr(1,MM_removeList,MM_nextItem,1) = 0) Then
    MM_keepForm = MM_keepForm & MM_nextItem &
Server.URLEncode(Request.Form(MM_item))
  End If
Next
' create the Form + URL string and remove the intial '&' from each of the strings
MM_keepBoth = MM_keepURL & MM_keepForm
If (MM_keepBoth <> "") Then
  MM_keepBoth = Right(MM_keepBoth, Len(MM_keepBoth) - 1)
End If
If (MM_keepURL <> "") Then
  MM_keepURL = Right(MM_keepURL, Len(MM_keepURL) - 1)
End If
If (MM_keepForm <> "") Then
  MM_keepForm = Right(MM_keepForm, Len(MM_keepForm) - 1)
End If
' a utility function used for adding additional parameters to these strings
Function MM_joinChar(firstItem)
  If (firstItem <> "") Then
    MM_joinChar = "&"
  Else
    MM_joinChar = ""
  End If
End Function
%>
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<title>Untitled Document</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
<style type="text/css">
<!--
.style1 {font-family: "comic Sans MS"}
-->
```

```
</style>
</head>
<body>
<p>" width="737" height="347">
</p>
<table width="769" border="2">
  <tr>
    <th width="137" scope="row">JUDUL</th>
    <td width="614"><span
class="style1"><%= (film.Fields.Item("Judul").Value) %></span></td>
  </tr>
  <tr>
    <th scope="row">DETAIL</th>
    <td><span class="style1"><%= (film.Fields.Item("detail").Value) %></span></td>
  </tr>
  <tr>
    <th scope="row"><A HREF="VIEWFILM.asp?<%=
Server.HTMLEncode(MM_keepNone) %>">KEMBALI</A></th>
    <td><A HREF="PLAYS.ASP?<%= Server.HTMLEncode(MM_keepNone) &
MM_joinChar(MM_keepNone) & "Nmr=" & film.Fields.Item("Nmr").Value
%>">PLAY</A></td>
  </tr>
</table>
<p>&nbsp;</p>
<p>&nbsp;</p>
</body>
</html>
<%
film.Close()
Set film = Nothing
%>
```

DetailfilmClient.asp

```
<% @LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!--#include file="Connections/conn_mydatabase.asp" -->
<%
Dim film__MMColParam
film__MMColParam = "1"
If (Request.QueryString("Nmr") <> "") Then
  film__MMColParam = Request.QueryString("Nmr")
End If
%>
<%
Dim film
```

```
Dim film_numRows
Set film = Server.CreateObject("ADODB.Recordset")
film.ActiveConnection = MM_conn_mydatabase_STRING
film.Source = "SELECT * FROM filmdatabase WHERE Nmr = " +
Replace(film__MMColParam, "", "") + ""
film.CursorType = 0
film.CursorLocation = 2
film.LockType = 1
film.Open()
film_numRows = 0
%>
<%
Dim MM_paramName
%>
<%
' *** Go To Record and Move To Record: create strings for maintaining URL and Form
parameters
Dim MM_keepNone
Dim MM_keepURL
Dim MM_keepForm
Dim MM_keepBoth
Dim MM_removeList
Dim MM_item
Dim MM_nextItem
' create the list of parameters which should not be maintained
MM_removeList = "&index="
If (MM_paramName <> "") Then
    MM_removeList = MM_removeList & "&" & MM_paramName & "="
End If
MM_keepURL=""
MM_keepForm=""
MM_keepBoth=""
MM_keepNone=""
' add the URL parameters to the MM_keepURL string
For Each MM_item In Request.QueryString
    MM_nextItem = "&" & MM_item & "="
    If (InStr(1,MM_removeList,MM_nextItem,1) = 0) Then
        MM_keepURL = MM_keepURL & MM_nextItem &
Server.URLEncode(Request.QueryString(MM_item))
    End If
Next
' add the Form variables to the MM_keepForm string
For Each MM_item In Request.Form
    MM_nextItem = "&" & MM_item & "="
    If (InStr(1,MM_removeList,MM_nextItem,1) = 0) Then
```

```
MM_keepForm = MM_keepForm & MM_nextItem &
Server.URLEncode(Request.Form(MM_item))
End If
Next
' create the Form + URL string and remove the initial '&' from each of the strings
MM_keepBoth = MM_keepURL & MM_keepForm
If (MM_keepBoth <> "") Then
  MM_keepBoth = Right(MM_keepBoth, Len(MM_keepBoth) - 1)
End If
If (MM_keepURL <> "") Then
  MM_keepURL = Right(MM_keepURL, Len(MM_keepURL) - 1)
End If
If (MM_keepForm <> "") Then
  MM_keepForm = Right(MM_keepForm, Len(MM_keepForm) - 1)
End If
' a utility function used for adding additional parameters to these strings
Function MM_joinChar(firstItem)
  If (firstItem <> "") Then
    MM_joinChar = "&"
  Else
    MM_joinChar = ""
  End If
End Function
%>
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<title>Untitled Document</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
<style type="text/css">
<!--
.style1 {font-family: "comic Sans MS"}
-->
</style>
</head>
<body>
<p>" width="737" height="347">
</p>
<table width="769" border="2">
<tr>
<th width="137" scope="row">JUDUL</th>
<td width="614"><span
class="style1"><%= (film.Fields.Item("Judul").Value) %></span></td>
</tr>
<tr>
```

```
<th scope="row">DETAIL</th>
<td><span class="style1"><%= (film.Fields.Item("detail").Value) %></span></td>
</tr>
<tr>
<th scope="row"><A HREF="video.asp?<%= Server.HtmlEncode(MM_keepNone)
%>">KEMBALI</A></th>
<td><A HREF="PlayCLIENT.asp?<%= Server.HtmlEncode(MM_keepNone) &
MM_joinChar(MM_keepNone) & "Nmr=" & film.Fields.Item("Nmr").Value
%>">PLAY</A></td>
</tr>
</table>
<p>&nbsp;</p>
<p>&nbsp;</p>
</body>
</html>
<%
film.Close()
Set film = Nothing
%>
```

Detailuser.asp

```
<% @LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!--#include file="Connections/conn_mydatabase.asp" -->
<!-- #include file="home1.asp" -->
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<title>Untitled Document</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>
<% if session("MM_Username") = empty then %>
<% response.Redirect "nlogin.asp" %>
<% ELSE %>
<% if session("posisi") <> "admin" then %>
<% response.Redirect "nadmin.asp" %>
<% ELSE %>
<%
Dim rs_user__MMColParam
rs_user__MMColParam = "1"
If (Request.QueryString("Nama") <> "") Then
rs_user__MMColParam = Request.QueryString("Nama")
End If
%>
<%
```

```
Dim rs_user
Dim rs_user_numRows
Set rs_user = Server.CreateObject("ADODB.Recordset")
rs_user.ActiveConnection = MM_conn_mydatabase_STRING
rs_user.Source = "SELECT * FROM userdatabase WHERE Nama = " +
Replace(rs_user__MMColParam, "", "") + ""
rs_user.CursorType = 0
rs_user.CursorLocation = 2
rs_user.LockType = 1
rs_user.Open()
rs_user_numRows = 0
%>
<body>
<p>" width="120" height="160"
hspace="20" align="left"></p>
<table width="200" border="0">
  <tr>
    <th scope="row">FID : </th>
    <td><%=rs_user.Fields.Item("FID").Value%></td>
  </tr>
  <tr>
    <th scope="row">Nama : </th>
    <td><%=rs_user.Fields.Item("Nama").Value%></td>
  </tr>
  <tr>
    <th scope="row">Password: </th>
    <td><%=rs_user.Fields.Item("Password").Value%></td>
  </tr>
  <tr>
    <th scope="row">Lokasi : </th>
    <td><%=rs_user.Fields.Item("Lokasi").Value%></td>
  </tr>
  <tr>
    <th scope="row">Level : </th>
    <td><%=rs_user.Fields.Item("Posisi").Value%></td>
  </tr>
  <tr>
    <th scope="row">Credit : </th>
    <td><%=rs_user.Fields.Item("Credit").Value%></td>
  </tr>
  <tr>
    <th scope="row">Photo : </th>
    <td><%=rs_user.Fields.Item("Photo").Value%></td>
  </tr>
</table>
<%
```



```
rs_user.Close()
Set rs_user = Nothing
%>
<% end if %>
<% end if %>
</body>
</html>
```

ExistFilm.asp

```
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<title>Untitled Document</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>
<body>
<p>FILM DENGAN JUDUL TERSEBUT SUDAH ADA. SILAHKAN PILIH JUDUL
YANG LAIN.</p>
<p><a href="Insertfilm.asp">INSERT FILM </a></p>
</body>
</html>
```

ExistUser.asp

```
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<title>Untitled Document</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>
<body>
<h1><strong>SUDAH ADA USER YANG MENGGUNAKAN NAMA ITU.
</strong></h1>
<p><font size="4"><b><a href="home.asp">Home</a></b></font></p>
</body>
</html>
```

Hendry.asp

```
<% @LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<title>Untitled Document</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>
<body>
<p>Saya adalah pembuat web ini, nama saya hendry, saat ini saya masih menyelesaikan
program studi S1 saya di Maranatha, web ini merupakan Tugas Akhir saya. Jika ada
pertanyaan atau saran, silahkan hubungi saya di hendry_kalem@yahoo.com.</p>
<p>Klik <a href="home.asp">Home</a> untuk kembali ke menu </p>
</body>
</html>
```

home.asp

```
<html>
<head>
<title>..: Selamat Datang di Komunitas video streaming Online ..</title>
</head>
<body>
<table border="0" cellpadding="0" cellspacing="0" width="100%">
<tr>
<td width="100%" colspan="2"><font size="7" face="arial
black"><u>video<font color="#ff000">STREAMING</font></u></font></td>
</tr>
<tr>
<td width="100%" colspan="2">
<span style="letter-spacing: 4"><font face=arial" size="2">Komunitas streaming
online</font></span></td>
</tr>
<tr>
<td width="100%" colspan="2"><hr></td>
</tr>
<tr>
<td width="18%" valign="top" nowrap>
<table width="100%" height="20" border="1" align="left" cellpadding="0"
cellspacing="0">
<tr>
<td width="100%" align="center" bgcolor="00080">
<font face="arial" size="2" color="#ffffff"><b>MENU</b></font></td>
</tr>
</table>
</td>
</tr>
```

```
<tr>
  <td width="100%" align="center"><a href="home.asp" style="text-
decoration:none"><font face="arial" size="2">Home</a></td>
</tr>
<tr>
  <td width="100%" align="center"><a href="login.asp" style="text-
decoration:none"><font face="arial" size="2">login</font></a><font size="2"
color="#808080">&nbsp;</font></td>
</tr>
<tr>
  <td width="100%" align="center"><a href="video.asp" style="text-
decoration:none"><font face="arial" size="2">video</font></a><font size="2"
color="#808080">&nbsp;</font></td>
</tr>
<tr>
  <td width="100%" align="center"><a href="web.asp" style="text-
decoration:none"><font face="arial" size="2">Web Master</font></a><font size="2"
color="#808080">&nbsp;</font></td>
</tr>
<tr>
  <td width="100%" align="center"><a href="logout.asp" style="text-
decoration:none"><font face="arial" size="2">logout</font></a><font size="2"
color="#808080">&nbsp;</font></td>
</tr>
</table>
  <blockquote>&nbsp;</blockquote></td>
  <td width="82%" valign="top" align="center"><br>
  <br>
  <marquee bgcolor="#00FFFF" width="307">Selamat Datang <%=
SESSION("MM_USERNAME") %></marquee><br>
  <br>
  <br>
  &nbsp;<p>&nbsp;</p>
  <p>Selamat datang di komunitas video streaming. web ini dibuat untuk memenuhi
tugas akhir saya <a href="hendry.asp">Hendry</a> Arti dari video streaming sendiri
secara kasar adalah kita diperbolehkan menonton suatu fim yang berasal dari Server,
tetapi kita tidak bisa mendownloadnya ke dalam kontainer PC kita. Sedang didalam web
ini saya membuatnya dengan menggunakan sistem multicast, dimana tidak semua
pengunjung dapat membuka web saya, hanya yang memiliki priviledge tertentu yang
boleh membuka web saya.
</table> </body>
</html>
```

Home1.asp

```
<html>
<head>
<title>..: Selamat Datang di Komunitas video streaming Online :..</title>
</head>
<body>
<table border="0" cellpadding="0" cellspacing="0" width="100%">
<tr>
<td width="100%" colspan="2"><font size="7" face="arial
black"><u>video<font color="#ff000">STREAMING</font></u></font></td>
</tr>
<tr>
<td width="100%" colspan="2">
<span style="letter-spacing: 4"><font face=arial" size="2">Komunitas streaming
online</font></span></td>
</tr>
<tr>
<td width="100%" colspan="2"><hr></td>
</tr>
<tr>
<td width="18%" valign="top" nowrap>
<table border="1" cellpadding="0" cellspacing="0" width="100%">
<tr>
<td width="100%" align="center" bgcolor="00080">
<font face="arial" size="2" color="#ffffff"><b>MENU</b></font></td>
</tr>
<tr>
<td width="100%" align="center"><a href="home.asp" style="text-
decoration:none"><font face="arial" size="2">Home</a></td>
</tr>
<tr>
<td width="100%" align="center"><a href="login.asp" style="text-
decoration:none"><font face="arial" size="2">login</font></a><font size="2"
color="#808080">&nbsp;</font></td>
</tr>
<tr>
<td width="100%" align="center"><a href="video.asp" style="text-
decoration:none"><font face="arial" size="2">video</font></a><font size="2"
color="#808080">&nbsp;</font></td>
</tr>
<tr>
<td width="100%" align="center"><a href="web.asp" style="text-
decoration:none"><font face="arial" size="2">Web Master</font></a><font size="2"
color="#808080">&nbsp;</font></td>
```

```
</tr>
<tr>
  <td width="100%" align="center"><a href="logout.asp" style="text-
decoration:none"><font face="arial" size="2">logout</font></a><font size="2"
color="#808080">&nbsp;</font></td>
</tr>
</table>
  </td>
  <td width="82%" valign="top" align="center"><br>
</body>
</html>
```

InsertFilm.asp

```
<% @LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!--#include file="Connections/conn_mydatabase.asp" -->
<!-- #include file="home1.asp" -->
<%
' *** Edit Operations: declare variables
Dim MM_editAction
Dim MM_abortEdit
Dim MM_editQuery
Dim MM_editCmd
Dim MM_editConnection
Dim MM_editTable
Dim MM_editRedirectUrl
Dim MM_editColumn
Dim MM_recordId
Dim MM_fieldsStr
Dim MM_columnsStr
Dim MM_fields
Dim MM_columns
Dim MM_typeArray
Dim MM_formVal
Dim MM_delim
Dim MM_altVal
Dim MM_emptyVal
Dim MM_i
MM_editAction = CStr(Request.ServerVariables("SCRIPT_NAME"))
If (Request.QueryString <> "") Then
  MM_editAction = MM_editAction & "?" &
Server.URLEncode(Request.QueryString)
End If
' boolean to abort record edit
MM_abortEdit = false
' query string to execute
```

```
MM_editQuery = ""
%>
<%
' *** Redirect if username exists
MM_flag="MM_insert"
If (CStr(Request(MM_flag)) <> "") Then
  MM_dupKeyRedirect="/existFILM.asp"
  MM_rsKeyConnection=MM_conn_mydatabase_STRING
  MM_dupKeyUsernameValue = CStr(Request.Form("judul"))
  MM_dupKeySQL="SELECT Judul FROM filmdatabase WHERE Judul=" &
MM_dupKeyUsernameValue & ""
  MM_adodbRecordset="ADODB.Recordset"
  set MM_rsKey=Server.CreateObject(MM_adodbRecordset)
  MM_rsKey.ActiveConnection=MM_rsKeyConnection
  MM_rsKey.Source=MM_dupKeySQL
  MM_rsKey.CursorType=0
  MM_rsKey.CursorLocation=2
  MM_rsKey.LockType=3
  MM_rsKey.Open
  If Not MM_rsKey.EOF Or Not MM_rsKey.BOF Then
    ' the username was found - can not add the requested username
    MM_qsChar = "?"
    If (InStr(1,MM_dupKeyRedirect,"?") >= 1) Then MM_qsChar = "&"
    MM_dupKeyRedirect = MM_dupKeyRedirect & MM_qsChar & "requername=" &
MM_dupKeyUsernameValue
    Response.Redirect(MM_dupKeyRedirect)
  End If
  MM_rsKey.Close
End If
%>
<%
' *** Insert Record: set variables
If (CStr(Request("MM_insert")) = "form1") Then
  MM_editConnection = MM_conn_mydatabase_STRING
  MM_editTable = "filmdatabase"
  MM_editRedirectUrl = "Viewfilm.asp"
  MM_fieldsStr = "judul|value|lokasi|value|photo|value|detail|value"
  MM_columnsStr = "Judul|',none,"|lokasi|',none,"|photo|',none,"|detail|',none,""
  ' create the MM_fields and MM_columns arrays
  MM_fields = Split(MM_fieldsStr, "|")
  MM_columns = Split(MM_columnsStr, "|")
  ' set the form values
  For MM_i = LBound(MM_fields) To UBound(MM_fields) Step 2
    MM_fields(MM_i+1) = CStr(Request.Form(MM_fields(MM_i)))
  Next
  ' append the query string to the redirect URL
```

```
If (MM_editRedirectUrl <> "" And Request.QueryString <> "") Then
  If (InStr(1, MM_editRedirectUrl, "?", vbTextCompare) = 0 And Request.QueryString
<> "") Then
    MM_editRedirectUrl = MM_editRedirectUrl & "?" & Request.QueryString
  Else
    MM_editRedirectUrl = MM_editRedirectUrl & "&" & Request.QueryString
  End If
End If
End If
%>
<%
' *** Insert Record: construct a sql insert statement and execute it
Dim MM_tableValues
Dim MM_dbValues
If (CStr(Request("MM_insert")) <> "") Then
  ' create the sql insert statement
  MM_tableValues = ""
  MM_dbValues = ""
  For MM_i = LBound(MM_fields) To UBound(MM_fields) Step 2
    MM_formVal = MM_fields(MM_i+1)
    MM_typeArray = Split(MM_columns(MM_i+1),",")
    MM_delim = MM_typeArray(0)
    If (MM_delim = "none") Then MM_delim = ""
    MM_altVal = MM_typeArray(1)
    If (MM_altVal = "none") Then MM_altVal = ""
    MM_emptyVal = MM_typeArray(2)
    If (MM_emptyVal = "none") Then MM_emptyVal = ""
    If (MM_formVal = "") Then
      MM_formVal = MM_emptyVal
    Else
      If (MM_altVal <> "") Then
        MM_formVal = MM_altVal
      ElseIf (MM_delim = "") Then ' escape quotes
        MM_formVal = "" & Replace(MM_formVal,"","'") & ""
      Else
        MM_formVal = MM_delim + MM_formVal + MM_delim
      End If
    End If
  End If
  If (MM_i <> LBound(MM_fields)) Then
    MM_tableValues = MM_tableValues & ","
    MM_dbValues = MM_dbValues & ","
  End If
  MM_tableValues = MM_tableValues & MM_columns(MM_i)
  MM_dbValues = MM_dbValues & MM_formVal
Next
```

```
MM_editQuery = "insert into " & MM_editTable & " (" & MM_tableValues & ")
values (" & MM_dbValues & ")"
If (Not MM_abortEdit) Then
    ' execute the insert
    Set MM_editCmd = Server.CreateObject("ADODB.Command")
    MM_editCmd.ActiveConnection = MM_editConnection
    MM_editCmd.CommandText = MM_editQuery
    MM_editCmd.Execute
    MM_editCmd.ActiveConnection.Close
    If (MM_editRedirectUrl <> "") Then
        Response.Redirect(MM_editRedirectUrl)
    End If
End If
End If
%>
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<title>Untitled Document</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>
<% if session("MM_Username") = empty then %>
<% response.Redirect "nologin.asp" %>
<% ELSE %>
<% if session("posisi") <> "admin" then %>
<% response.Redirect "noadmin.asp" %>
<% ELSE %>
<%
Dim film
Dim film_numRows
Set film = Server.CreateObject("ADODB.Recordset")
film.ActiveConnection = MM_conn_mydatabase_STRING
film.Source = "SELECT * FROM filmdatabase"
film.CursorType = 0
film.CursorLocation = 2
film.LockType = 1
film.Open()
film_numRows = 0
%>
<body>
<form ACTION="<>MM_editAction%>" METHOD="POST" name="form1">
<table width="200" border="2">
<tr>
<th scope="row">JUDUL</th>
<td><input name="judul" type="text" id="judul"></td>
```



```
</tr>
<tr>
  <th scope="row">LOKASI</th>
  <td><input name="lokasi" type="text" id="lokasi"></td>
</tr>
<tr>
  <th scope="row">PHOTO</th>
  <td><input name="photo" type="text" id="photo"></td>
</tr>
<tr>
  <th scope="row">DETAIL</th>
  <td><input name="detail" type="text" id="detail"></td>
</tr>
<tr>
  <th scope="row"><input name="Insert" type="submit" id="Insert"
value="Insert"></th>
  <td>&nbsp;</td>
</tr>
</table>
  <input type="hidden" name="MM_insert" value="form1">
</form>
<%
film.Close()
Set film = Nothing
%>
<% end if %>
<% end if %>
</body>
</html>
```

InserUser.asp

```
<% @LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!--#include file="Connections/conn_mydatabase.asp" -->
<!--#include file="home1.asp" -->
<%
' *** Edit Operations: declare variables
Dim MM_editAction
Dim MM_abortEdit
Dim MM_editQuery
Dim MM_editCmd
Dim MM_editConnection
Dim MM_editTable
Dim MM_editRedirectUrl
Dim MM_editColumn
Dim MM_recordId
```

```
Dim MM_fieldsStr
Dim MM_columnsStr
Dim MM_fields
Dim MM_columns
Dim MM_typeArray
Dim MM_formVal
Dim MM_delim
Dim MM_altVal
Dim MM_emptyVal
Dim MM_i
MM_editAction = CStr(Request.ServerVariables("SCRIPT_NAME"))
If (Request.QueryString <> "") Then
    MM_editAction = MM_editAction & "?" &
Server.HTMLEncode(Request.QueryString)
End If
' boolean to abort record edit
MM_abortEdit = false
' query string to execute
MM_editQuery = ""
%>
<%
' *** Redirect if username exists
MM_flag="MM_insert"
If (CStr(Request(MM_flag)) <> "") Then
    MM_dupKeyRedirect="existUSER.asp"
    MM_rsKeyConnection=MM_conn_mydatabase_STRING
    MM_dupKeyUsernameValue = CStr(Request.Form("nama"))
    MM_dupKeySQL="SELECT Nama FROM userdatabase WHERE Nama=" &
MM_dupKeyUsernameValue & ""
    MM_adodbRecordset="ADODB.Recordset"
    set MM_rsKey=Server.CreateObject(MM_adodbRecordset)
    MM_rsKey.ActiveConnection=MM_rsKeyConnection
    MM_rsKey.Source=MM_dupKeySQL
    MM_rsKey.CursorType=0
    MM_rsKey.CursorLocation=2
    MM_rsKey.LockType=3
    MM_rsKey.Open
    If Not MM_rsKey.EOF Or Not MM_rsKey.BOF Then
        ' the username was found - can not add the requested username
        MM_qsChar = "?"
        If (InStr(1,MM_dupKeyRedirect,"?") >= 1) Then MM_qsChar = "&"
        MM_dupKeyRedirect = MM_dupKeyRedirect & MM_qsChar & "requername=" &
MM_dupKeyUsernameValue
        Response.Redirect(MM_dupKeyRedirect)
    End If
    MM_rsKey.Close
```

```
End If
%>
<%
' *** Insert Record: set variables
If (CStr(Request("MM_insert")) = "form1") Then
    MM_editConnection = MM_conn_mydatabase_STRING
    MM_editTable = "userdatabase"
    MM_editRedirectUrl = "viewuser.asp"
    MM_fieldsStr =
"nama|value|password|value|lokasi|value|posisi|value|credit|value|Photo|value"
    MM_columnsStr =
"Nama|',none,'|Password|',none,'|Lokasi|',none,'|Posisi|',none,'|Credit|none,none,NULL|P
hoto|',none,'"
    ' create the MM_fields and MM_columns arrays
    MM_fields = Split(MM_fieldsStr, "|")
    MM_columns = Split(MM_columnsStr, "|")
    ' set the form values
    For MM_i = LBound(MM_fields) To UBound(MM_fields) Step 2
        MM_fields(MM_i+1) = CStr(Request.Form(MM_fields(MM_i)))
    Next
    ' append the query string to the redirect URL
    If (MM_editRedirectUrl <> "" And Request.QueryString <> "") Then
        If (InStr(1, MM_editRedirectUrl, "?", vbTextCompare) = 0 And Request.QueryString
<> "") Then
            MM_editRedirectUrl = MM_editRedirectUrl & "?" & Request.QueryString
        Else
            MM_editRedirectUrl = MM_editRedirectUrl & "&" & Request.QueryString
        End If
    End If
End If
%>
<%
' *** Insert Record: construct a sql insert statement and execute it
Dim MM_tableValues
Dim MM_dbValues
If (CStr(Request("MM_insert")) <> "") Then
    ' create the sql insert statement
    MM_tableValues = ""
    MM_dbValues = ""
    For MM_i = LBound(MM_fields) To UBound(MM_fields) Step 2
        MM_formVal = MM_fields(MM_i+1)
        MM_typeArray = Split(MM_columns(MM_i+1),",")
        MM_delim = MM_typeArray(0)
        If (MM_delim = "none") Then MM_delim = ""
        MM_altVal = MM_typeArray(1)
        If (MM_altVal = "none") Then MM_altVal = ""
```

```
MM_emptyVal = MM_typeArray(2)
If (MM_emptyVal = "none") Then MM_emptyVal = ""
If (MM_formVal = "") Then
    MM_formVal = MM_emptyVal
Else
    If (MM_altVal <> "") Then
        MM_formVal = MM_altVal
    ElseIf (MM_delim = "") Then ' escape quotes
        MM_formVal = "" & Replace(MM_formVal,"","") & ""
    Else
        MM_formVal = MM_delim + MM_formVal + MM_delim
    End If
End If
If (MM_i <> LBound(MM_fields)) Then
    MM_tableValues = MM_tableValues & ","
    MM_dbValues = MM_dbValues & ","
End If
MM_tableValues = MM_tableValues & MM_columns(MM_i)
MM_dbValues = MM_dbValues & MM_formVal
Next
MM_editQuery = "insert into " & MM_editTable & " (" & MM_tableValues & ")
values (" & MM_dbValues & ")"
If (Not MM_abortEdit) Then
    ' execute the insert
    Set MM_editCmd = Server.CreateObject("ADODB.Command")
    MM_editCmd.ActiveConnection = MM_editConnection
    MM_editCmd.CommandText = MM_editQuery
    MM_editCmd.Execute
    MM_editCmd.ActiveConnection.Close
    If (MM_editRedirectUrl <> "") Then
        Response.Redirect(MM_editRedirectUrl)
    End If
End If
End If
%>
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<title>Untitled Document</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
<style type="text/css">
<!--
.style4 {font-size: x-large}
-->
</style>
```

```
</head>
<% if session("MM_Username") = empty then %>
<% response.Redirect "nlogin.asp" %>
<% ELSE %>
<% if session("posisi") <> "admin" then %>
<% response.redirect "nadmin.asp" %>
<% ELSE %>
<%
Dim rs_user
Dim rs_user_numRows
Set rs_user = Server.CreateObject("ADODB.Recordset")
rs_user.ActiveConnection = MM_conn_mydatabase_STRING
rs_user.Source = "SELECT * FROM userdatabase"
rs_user.CursorType = 0
rs_user.CursorLocation = 2
rs_user.LockType = 1
rs_user.Open()
rs_user_numRows = 0
%>
<body>
<form ACTION="<%=MM_editAction%>" METHOD="POST" name="form1">
  <table width="200" border="0">
    <tr>
      <th scope="row">Nama : </th>
      <td><input name="nama" type="text" id="nama"></td>
    </tr>
    <tr>
      <th scope="row">Password:</th>
      <td><input name="password" type="password" id="password"></td>
    </tr>
    <tr>
      <th scope="row">Lokasi : </th>
      <td><input name="lokasi" type="text" id="lokasi"></td>
    </tr>
    <tr>
      <th scope="row">Level : </th>
      <td><select name="posisi" id="posisi">
        <option value="admin">admin</option>
        <option value="member">member</option>
      </select></td>
    </tr>
    <tr>
      <th scope="row">Credit : </th>
      <td><input name="credit" type="text" id="credit"></td>
    </tr>
  </table>
</form>
```

```
<th scope="row">Photo : </th>
<td><input name="Photo" type="text" id="Photo"></td>
</tr>
<tr>
<th scope="row"><input type="submit" name="Submit" value="Submit"></th>
<td>&nbsp;</td>
</tr>
</table>
<input type="hidden" name="MM_insert" value="form1">
</form>
<%
rs_user.Close()
Set rs_user = Nothing
%>
</body>
<% end if %>
<% end if %>
</html>
```

Login.asp

```
<% @LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<!-- #include file="home1.asp" -->
<html>
<head>
<title>Login </title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
<style type="text/css">
<!--
.style2 { font-family: "comic Sans MS" }
-->
</style>
</head>
<body>
<%
If Not Request.Form("Message") = "True" Then
%>
<p>
<FORM NAME="login" METHOD="POST" ACTION="login.asp">
<table>
<tr>
<td><font face="MS Gothic">Nama: </td><td>
<INPUT TYPE="TEXT" NAME="nama" size="20"></td>
```

```
</tr><tr>
<td><font face="MS Gothic">Password:</td><td>
<INPUT TYPE="TEXT" NAME="password" size="20"></td>
</tr><tr>
</table>
</p>
<p>
<INPUT TYPE="HIDDEN" NAME="Message" VALUE="True">
<INPUT TYPE="SUBMIT" VALUE="Submit Information">
</FORM>
</p>
<%Else
dim dataku,koneksi,sqlku
set koneksi = server.createobject("ADODB.connection")
koneksi.open "Mydatabase"
set dataku = server.createobject("ADODB.recordset")
dataku.open "select * from userdatabase WHERE Nama= '" & request.form("nama") &
"AND " & "Password = '" & request.form("password") & "'", koneksi
if dataku.eof then
%>
<h3>Username atau Password Anda Salah!</h3>
<h2><br>
<% else
session("MM_Username") = dataku("Nama")
session("credit") = dataku("credit")
session("posisi") = dataku("posisi")
dataku.close %>
<span class="style2">Login Berhasil. </span></h2>
<p><span class="style2">Selamat mengunjungi web streaming ini. klik VIDEO untuk
Streaming data.</span>
<% end if %>
<% end if %>
</p>
</body>
</html>
```

Logout.asp

```
<html>
<body>
<h1>
<% session("MM_Username") = empty %>
<% session("credit") = empty %>
LOGOUT BERHASIL
</h1>
<p>Klik <a href="home.asp">Home</a> untuk kembali ke menu utama. </p>
```

```
</body>
</html>
```

Noadmin.asp

```
<% @LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<title>Untitled Document</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>
<body>
<h1>AREA INI KHUSUS UNTUK ADMIN !</h1>
<p><a href="HOME.ASP">HOME </a></p>
</body>
</html>
```

Nocredit.asp

```
<% @LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<title>Untitled Document</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>
<body>
<h1>CREDIT ANDA SUDAH HABIS !</h1>
<p><a href="HOME.ASP">HOME </a></p>
</body>
</html>
```

Nologin.asp

```
<% @LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<title>Untitled Document</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>
<body>
```



```
<h1>ANDA BELUM LOGIN ! SILAHKAN LOGIN TERLEBIH DAHULU </h1>
<p><a href="HOME.ASP">HOME </a></p>
</body>
</html>
```

PlayCLIENT.asp

```
<% @LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!--#include file="Connections/conn_mydatabase.asp" -->
<%
Dim FILM__MMColParam
FILM__MMColParam = "1"
If (Request.QueryString("Nmr") <> "") Then
    FILM__MMColParam = Request.QueryString("Nmr")
End If
%>
<%
Dim FILM
Dim FILM_numRows
Set FILM = Server.CreateObject("ADODB.Recordset")
FILM.ActiveConnection = MM_conn_mydatabase_STRING
FILM.Source = "SELECT * FROM filmdatabase WHERE Nmr = " +
Replace(FILM__MMColParam, "", "") + ""
FILM.CursorType = 0
FILM.CursorLocation = 2
FILM.LockType = 1
FILM.Open()
FILM_numRows = 0
%>
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>
<% if session("MM_Username") = empty then %>
<% response.Redirect "nologin.asp" %>
<% ELSE %>
<% if session("credit") <= 0 then %>
<% response.Redirect "noadmin.asp" %><% ELSE %>
<% session("credit") = session("credit") - 1 %>
<%
set koneksi =server.CreateObject("ADODB.connection")
koneksi.open "Mydatabase"
sql="UPDATE userdatabase SET credit=credit -1 where
Nama=""&Session("MM_Username")&""
```

```
set record=server.CreateObject("ADODB.recordset")
record.open sql,koneksi,3,3
%>
<head>
<meta name="GENERATOR" content="Microsoft FrontPage 5.0">
<meta name="ProgId" content="FrontPage.Editor.Document">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1252">
</head>
<body vlink="#00FFFF">
<p align="center">
<object classid="clsid:22D6F312-B0F6-11D0-94AB-0080C74C7E95"
id="MediaPlayer1" width="656" height="540">
  <param name="AudioStream" value="-1">
  <param name="AutoSize" value="0">
  <param name="AutoStart" value="-1">
  <param name="AnimationAtStart" value="-1">
  <param name="AllowScan" value="-1">
  <param name="AllowChangeDisplaySize" value="-1">
  <param name="AutoRewind" value="0">
  <param name="Balance" value="0">
  <param name="BaseURL" value>
  <param name="BufferingTime" value="5">
  <param name="CaptioningID" value>
  <param name="ClickToPlay" value="-1">
  <param name="CursorType" value="0">
  <param name="CurrentPosition" value="-1">
  <param name="CurrentMarker" value="0">
  <param name="DefaultFrame" value>
  <param name="DisplayBackColor" value="0">
  <param name="DisplayForeColor" value="16777215">
  <param name="DisplayMode" value="0">
  <param name="DisplaySize" value="4">
  <param name="Enabled" value="-1">
  <param name="EnableContextMenu" value="-1">
  <param name="EnablePositionControls" value="-1">
  <param name="EnableFullScreenControls" value="0">
  <param name="EnableTracker" value="-1">
  <param name="Filename" valuetype="ref"
value="HTTP://LOCALHOST/hom/film/<%= (FILM.Fields.Item("lokasi").Value)%>">
  <param name="InvokeURLs" value="-1">
  <param name="Language" value="-1">
  <param name="Mute" value="0">
  <param name="PlayCount" value="1">
  <param name="PreviewMode" value="0">
  <param name="Rate" value="1">
  <param name="SAMILang" value>
```

```
<param name="SAMISyle" value>
<param name="SAMIFileName" value>
<param name="SelectionStart" value="-1">
<param name="SelectionEnd" value="-1">
<param name="SendOpenStateChangeEvents" value="-1">
<param name="SendWarningEvents" value="-1">
<param name="SendErrorEvents" value="-1">
<param name="SendKeyboardEvents" value="0">
<param name="SendMouseClickedEvents" value="0">
<param name="SendMouseMoveEvents" value="0">
<param name="SendPlayStateChangeEvents" value="-1">
<param name="ShowCaptioning" value="0">
<param name="ShowControls" value="-1">
<param name="ShowAudioControls" value="-1">
<param name="ShowDisplay" value="0">
<param name="ShowGotoBar" value="0">
<param name="ShowPositionControls" value="-1">
<param name="ShowStatusBar" value="0">
<param name="ShowTracker" value="-1">
<param name="TransparentAtStart" value="0">
<param name="VideoBorderWidth" value="0">
<param name="VideoBorderColor" value="0">
<param name="VideoBorder3D" value="0">
<param name="Volume" value="-600">
<param name="WindowlessVideo" value="0">
</object>
</p>
<p align="justify"><font size="5"><b><i>klik <a href="video.ASP">link </a>ini untuk
kembali ke menu</i></b></font></p>
<%
FILM.Close()
Set FILM = Nothing
%>
<% END IF %>
<% END IF %>
</body>
</html>
```

Plays.asp

```
<% @LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!--#include file="Connections/conn_mydatabase.asp" -->
<%
Dim FILM__MMColParam
FILM__MMColParam = "1"
If (Request.QueryString("Nmr") <> "") Then
```

```
FILM__MMColParam = Request.QueryString("Nmr")
End If
%>
<%
Dim FILM
Dim FILM_numRows
Set FILM = Server.CreateObject("ADODB.Recordset")
FILM.ActiveConnection = MM_conn_mydatabase_STRING
FILM.Source = "SELECT * FROM filmdatabase WHERE Nmr = " +
Replace(FILM__MMColParam, "'", "''") + "'"
FILM.CursorType = 0
FILM.CursorLocation = 2
FILM.LockType = 1
FILM.Open()
FILM_numRows = 0
%>
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<title>Untitled Document</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>
<% if session("MM_Username") = empty then %>
<% response.Redirect "nlogin.asp" %>
<% ELSE %>
<% if session("posisi") <> "admin" then %>
<% response.Redirect "noadmin.asp" %>
<% ELSE %>
<head>
<meta name="GENERATOR" content="Microsoft FrontPage 5.0">
<meta name="ProgId" content="FrontPage.Editor.Document">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1252">
<title>New Page 1</title>
</head>
<body vlink="#00FFFF">
<p align="center">
<object classid="clsid:22D6F312-B0F6-11D0-94AB-0080C74C7E95"
id="MediaPlayer1" width="656" height="540">
<param name="AudioStream" value="-1">
<param name="AutoSize" value="0">
<param name="AutoStart" value="-1">
<param name="AnimationAtStart" value="-1">
<param name="AllowScan" value="-1">
<param name="AllowChangeDisplaySize" value="-1">
<param name="AutoRewind" value="0">
```

```
<param name="Balance" value="0">
<param name="BaseURL" value>
<param name="BufferingTime" value="5">
<param name="CaptioningID" value>
<param name="ClickToPlay" value="-1">
<param name="CursorType" value="0">
<param name="CurrentPosition" value="-1">
<param name="CurrentMarker" value="0">
<param name="DefaultFrame" value>
<param name="DisplayBackColor" value="0">
<param name="DisplayForeColor" value="16777215">
<param name="DisplayMode" value="0">
<param name="DisplaySize" value="4">
<param name="Enabled" value="-1">
<param name="EnableContextMenu" value="-1">
<param name="EnablePositionControls" value="-1">
<param name="EnableFullScreenControls" value="0">
<param name="EnableTracker" value="-1">
<param name="Filename" valuetype="ref"
value="HTTP://LOCALHOST/hom/film/<%= (FILM.Fields.Item("lokasi").Value)%>">
<param name="InvokeURLs" value="-1">
<param name="Language" value="-1">
<param name="Mute" value="0">
<param name="PlayCount" value="1">
<param name="PreviewMode" value="0">
<param name="Rate" value="1">
<param name="SAMILang" value>
<param name="SAMISStyle" value>
<param name="SAMIFilename" value>
<param name="SelectionStart" value="-1">
<param name="SelectionEnd" value="-1">
<param name="SendOpenStateChangeEvents" value="-1">
<param name="SendWarningEvents" value="-1">
<param name="SendErrorEvents" value="-1">
<param name="SendKeyboardEvents" value="0">
<param name="SendMouseClickEvents" value="0">
<param name="SendMouseMoveEvents" value="0">
<param name="SendPlayStateChangeEvents" value="-1">
<param name="ShowCaptioning" value="0">
<param name="ShowControls" value="-1">
<param name="ShowAudioControls" value="-1">
<param name="ShowDisplay" value="0">
<param name="ShowGotoBar" value="0">
<param name="ShowPositionControls" value="-1">
<param name="ShowStatusBar" value="0">
<param name="ShowTracker" value="-1">
```

```
<param name="TransparentAtStart" value="0">
<param name="VideoBorderWidth" value="0">
<param name="VideoBorderColor" value="0">
<param name="VideoBorder3D" value="0">
<param name="Volume" value="-600">
<param name="WindowlessVideo" value="0">
</object>
</p>
<p align="justify"><font size="5"><b><i>klik <a href="viewfilm.ASP">link </a>ini
untuk kembali ke menu</i></b></font></p>
<% END IF %>
<% END IF %>
</body>
</html>
<%
FILM.Close()
Set FILM = Nothing
%>
```

Searchfilm.asp

```
<% @LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!--#include file="Connections/conn_mydatabase.asp" -->
<!-- #include file="home1.asp" -->
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<title>Untitled Document</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>
<% if session("MM_Username") = empty then %>
<% response.Redirect "nlogin.asp" %>
<% ELSE %>
<% if session("posisi") <> "admin" then %>
<% response.Redirect "noadmin.asp" %>
<% ELSE %>
<%
Dim film__MMColParam
film__MMColParam = "1"
If (Request.Form("Judul") <> "") Then
    film__MMColParam = Request.Form("Judul")
End If
%>
<%
```

```
Dim film
Dim film_numRows
Set film = Server.CreateObject("ADODB.Recordset")
film.ActiveConnection = MM_conn_mydatabase_STRING
film.Source = "SELECT * FROM filmdatabase WHERE Judul = " +
Replace(film__MMColParam, "", "") + ""
film.CursorType = 0
film.CursorLocation = 2
film.LockType = 1
film.Open()
film_numRows = 0
%>
<%
Dim Repeat1__numRows
Dim Repeat1__index
Repeat1__numRows = -1
Repeat1__index = 0
film_numRows = film_numRows + Repeat1__numRows
%>
<%
Dim MM_paramName
%>
<%
' *** Go To Record and Move To Record: create strings for maintaining URL and Form
parameters
Dim MM_keepNone
Dim MM_keepURL
Dim MM_keepForm
Dim MM_keepBoth
Dim MM_removeList
Dim MM_item
Dim MM_nextItem
' create the list of parameters which should not be maintained
MM_removeList = "&index="
If (MM_paramName <> "") Then
    MM_removeList = MM_removeList & "&" & MM_paramName & "="
End If
MM_keepURL=""
MM_keepForm=""
MM_keepBoth=""
MM_keepNone=""
' add the URL parameters to the MM_keepURL string
For Each MM_item In Request.QueryString
    MM_nextItem = "&" & MM_item & "="
    If (InStr(1,MM_removeList,MM_nextItem,1) = 0) Then
```

```
MM_keepURL = MM_keepURL & MM_nextItem &
Server.URLEncode(Request.QueryString(MM_item))
End If
Next
' add the Form variables to the MM_keepForm string
For Each MM_item In Request.Form
MM_nextItem = "&" & MM_item & "="
If (InStr(1,MM_removeList,MM_nextItem,1) = 0) Then
MM_keepForm = MM_keepForm & MM_nextItem &
Server.URLEncode(Request.Form(MM_item))
End If
Next
' create the Form + URL string and remove the initial '&' from each of the strings
MM_keepBoth = MM_keepURL & MM_keepForm
If (MM_keepBoth <> "") Then
MM_keepBoth = Right(MM_keepBoth, Len(MM_keepBoth) - 1)
End If
If (MM_keepURL <> "") Then
MM_keepURL = Right(MM_keepURL, Len(MM_keepURL) - 1)
End If
If (MM_keepForm <> "") Then
MM_keepForm = Right(MM_keepForm, Len(MM_keepForm) - 1)
End If
' a utility function used for adding additional parameters to these strings
Function MM_joinChar(firstItem)
If (firstItem <> "") Then
MM_joinChar = "&"
Else
MM_joinChar = ""
End If
End Function
%>
<body>
<% If Not film.EOF Or Not film.BOF Then %>
<table width="200" border="2">
<tr>
<th scope="col">No</th>
<th scope="col">.....JUDUL.....</th>
<th scope="col">LOKASI</th>
<th scope="col">UPDATE</th>
</tr>
<%
While ((Repeat1__numRows <> 0) AND (NOT film.EOF))
%>
<tr>
<td><%=film.Fields.Item("Nmr").Value%></td>
```



```
<td><%= (film.Fields.Item("Judul").Value) %></td>
<td><%= (film.Fields.Item("lokasi").Value) %></td>
<td><A HREF="Updatefilm.asp?<%= Server.HtmlEncode(MM_keepNone) &
MM_joinChar(MM_keepNone) & "Nmr=" & film.Fields.Item("Nmr").Value
%>">U</A></td>
</tr>
<%
Repeat1__index=Repeat1__index+1
Repeat1__numRows=Repeat1__numRows-1
film.MoveNext()
Wend
%>
</table>
<% End If ' end Not film.EOF Or NOT film.BOF %>
<p>&nbsp;</p>
<form name="form1" method="post" action="">
<input name="judul" type="text" id="judul">
<input name="Search" type="submit" id="Search" value="Search">
</form>
<p>&nbsp;</p>
<%
film.Close()
Set film = Nothing
%>
<% end if %>
<% end if %>
</body>
</html>
```

SearchUser.asp

```
<% @LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!--#include file="Connections/conn_mydatabase.asp" -->
<!-- #include file="home1.asp" -->
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<title>Untitled Document</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>
<% if session("MM_Username") = empty then %>
<% response.Redirect "nlogin.asp" %>
<% ELSE %>
<% if session("posisi") <> "admin" then %>
<% response.Redirect "nadmin.asp" %>
```

```
<% ELSE %>
<%
Dim rs_user__MMColParam
rs_user__MMColParam = "1"
If (Request.Form("Nama") <> "") Then
    rs_user__MMColParam = Request.Form("Nama")
End If
%>
<%
Dim rs_user
Dim rs_user_numRows
Set rs_user = Server.CreateObject("ADODB.Recordset")
rs_user.ActiveConnection = MM_conn_mydatabase_STRING
rs_user.Source = "SELECT * FROM userdatabase WHERE Nama = "" +
Replace(rs_user__MMColParam, "", "") + ""
rs_user.CursorType = 0
rs_user.CursorLocation = 2
rs_user.LockType = 1
rs_user.Open()
rs_user_numRows = 0
%>
<%
Dim Repeat1__numRows
Dim Repeat1__index
Repeat1__numRows = 10
Repeat1__index = 0
rs_user_numRows = rs_user_numRows + Repeat1__numRows
%>
<%
Dim MM_paramName
%>
<%
' *** Go To Record and Move To Record: create strings for maintaining URL and Form
parameters
Dim MM_keepNone
Dim MM_keepURL
Dim MM_keepForm
Dim MM_keepBoth
Dim MM_removeList
Dim MM_item
Dim MM_nextItem
' create the list of parameters which should not be maintained
MM_removeList = "&index="
If (MM_paramName <> "") Then
    MM_removeList = MM_removeList & "&" & MM_paramName & "="
End If
```

```
MM_keepURL=""
MM_keepForm=""
MM_keepBoth=""
MM_keepNone=""
' add the URL parameters to the MM_keepURL string
For Each MM_item In Request.QueryString
    MM_nextItem = "&" & MM_item & "="
    If (InStr(1,MM_removeList,MM_nextItem,1) = 0) Then
        MM_keepURL = MM_keepURL & MM_nextItem &
Server.URLEncode(Request.QueryString(MM_item))
    End If
Next
' add the Form variables to the MM_keepForm string
For Each MM_item In Request.Form
    MM_nextItem = "&" & MM_item & "="
    If (InStr(1,MM_removeList,MM_nextItem,1) = 0) Then
        MM_keepForm = MM_keepForm & MM_nextItem &
Server.URLEncode(Request.Form(MM_item))
    End If
Next
' create the Form + URL string and remove the initial '&' from each of the strings
MM_keepBoth = MM_keepURL & MM_keepForm
If (MM_keepBoth <> "") Then
    MM_keepBoth = Right(MM_keepBoth, Len(MM_keepBoth) - 1)
End If
If (MM_keepURL <> "") Then
    MM_keepURL = Right(MM_keepURL, Len(MM_keepURL) - 1)
End If
If (MM_keepForm <> "") Then
    MM_keepForm = Right(MM_keepForm, Len(MM_keepForm) - 1)
End If
' a utility function used for adding additional parameters to these strings
Function MM_joinChar(firstItem)
    If (firstItem <> "") Then
        MM_joinChar = "&"
    Else
        MM_joinChar = ""
    End If
End Function
%>
<body>
<% If Not rs_user.EOF Or Not rs_user.BOF Then %>
<table width="200" border="1">
<tr>
<th scope="col">FID</th>
<th scope="col">Nama</th>
```

```

<th scope="col">Password</th>
<th scope="col">Lokasi</th>
<th scope="col">Level</th>
<th scope="col">Credit</th>
<th scope="col">Photo</th>
<th scope="col">Update</th>
<th scope="col">Delete</th>
</tr>
<%
While ((Repeat1__numRows <> 0) AND (NOT rs_user.EOF))
%>
<tr>
<td><%=rs_user.Fields.Item("FID").Value%>&nbsp;</td>
<td><A HREF="detailuser.asp?<%= Server.HTMLEncode(MM_keepNone) &
MM_joinChar(MM_keepNone) & "Nama=" & rs_user.Fields.Item("Nama").Value
%>"><%=rs_user.Fields.Item("Nama").Value%></A>&nbsp;</td>
<td><%=rs_user.Fields.Item("Password").Value%>&nbsp;</td>
<td><%=rs_user.Fields.Item("Lokasi").Value%>&nbsp;</td>
<td><%=rs_user.Fields.Item("Posisi").Value%>&nbsp;</td>
<td><%=rs_user.Fields.Item("Credit").Value%>&nbsp;</td>
<td><%=rs_user.Fields.Item("Photo").Value%>&nbsp;</td>
<td><a href="Updateuser.asp?<%= Server.HTMLEncode(MM_keepNone) &
MM_joinChar(MM_keepNone) & "Nama=" & rs_user.Fields.Item("Nama").Value
%>">U</a></td>
<td><A HREF="deleteuser.asp?<%= Server.HTMLEncode(MM_keepNone) &
MM_joinChar(MM_keepNone) & "Nama=" & rs_user.Fields.Item("Nama").Value
%>">D</A></td>
</tr>
<%
Repeat1__index=Repeat1__index+1
Repeat1__numRows=Repeat1__numRows-1
rs_user.MoveNext()
Wend
%>
</table>
<% End If ' end Not rs_user.EOF Or NOT rs_user.BOF %>
<form action="searchuser.asp" method="post" name="search" id="search">
<strong>
Nama User:
<input name="nama" type="text" id="Nama2" size="20">
<input name="search" type="submit" id="search2" value="search">
</strong>
</form>
<p>&nbsp;</p>
<%
rs_user.Close()

```

```
Set rs_user = Nothing
%>
<% end if %>
<% end if %>
</body>
</html>
```

Updatefilm.asp

```
<% @LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!--#include file="Connections/conn_mydatabase.asp" -->
<!-- #include file="home1.asp" -->
<%
' *** Edit Operations: declare variables
Dim MM_editAction
Dim MM_abortEdit
Dim MM_editQuery
Dim MM_editCmd
Dim MM_editConnection
Dim MM_editTable
Dim MM_editRedirectUrl
Dim MM_editColumn
Dim MM_recordId
Dim MM_fieldsStr
Dim MM_columnsStr
Dim MM_fields
Dim MM_columns
Dim MM_typeArray
Dim MM_formVal
Dim MM_delim
Dim MM_altVal
Dim MM_emptyVal
Dim MM_i
MM_editAction = CStr(Request.ServerVariables("SCRIPT_NAME"))
If (Request.QueryString <> "") Then
    MM_editAction = MM_editAction & "?" &
Server.URLEncode(Request.QueryString)
End If
' boolean to abort record edit
MM_abortEdit = false
' query string to execute
MM_editQuery = ""
%>
<%
' *** Update Record: set variables
```

```
If (CStr(Request("MM_update")) = "form1" And CStr(Request("MM_recordId")) <> "")
Then
  MM_editConnection = MM_conn_mydatabase_STRING
  MM_editTable = "filmdatabase"
  MM_editColumn = "Nmr"
  MM_recordId = "" + Request.Form("MM_recordId") + ""
  MM_editRedirectUrl = "Viewfilm.asp"
  MM_fieldsStr = "judul|value|lokasi|value|photo|value|detail|value"
  MM_columnsStr = "Judul|,none,|"lokasi|,none,|"photo|,none,|"detail|,none,|"
  ' create the MM_fields and MM_columns arrays
  MM_fields = Split(MM_fieldsStr, "|")
  MM_columns = Split(MM_columnsStr, "|")
  ' set the form values
  For MM_i = LBound(MM_fields) To UBound(MM_fields) Step 2
    MM_fields(MM_i+1) = CStr(Request.Form(MM_fields(MM_i)))
  Next
  ' append the query string to the redirect URL
  If (MM_editRedirectUrl <> "" And Request.QueryString <> "") Then
    If (InStr(1, MM_editRedirectUrl, "?", vbTextCompare) = 0 And Request.QueryString
    <> "") Then
      MM_editRedirectUrl = MM_editRedirectUrl & "?" & Request.QueryString
    Else
      MM_editRedirectUrl = MM_editRedirectUrl & "&" & Request.QueryString
    End If
  End If
End If
%>
<%
' *** Update Record: construct a sql update statement and execute it
If (CStr(Request("MM_update")) <> "" And CStr(Request("MM_recordId")) <> "")
Then
  ' create the sql update statement
  MM_editQuery = "update " & MM_editTable & " set "
  For MM_i = LBound(MM_fields) To UBound(MM_fields) Step 2
    MM_formVal = MM_fields(MM_i+1)
    MM_typeArray = Split(MM_columns(MM_i+1),",")
    MM_delim = MM_typeArray(0)
    If (MM_delim = "none") Then MM_delim = ""
    MM_altVal = MM_typeArray(1)
    If (MM_altVal = "none") Then MM_altVal = ""
    MM_emptyVal = MM_typeArray(2)
    If (MM_emptyVal = "none") Then MM_emptyVal = ""
    If (MM_formVal = "") Then
      MM_formVal = MM_emptyVal
    Else
      If (MM_altVal <> "") Then
```

```
MM_formVal = MM_altVal
ElseIf (MM_delim = "") Then ' escape quotes
MM_formVal = "" & Replace(MM_formVal,"","") & ""
Else
MM_formVal = MM_delim + MM_formVal + MM_delim
End If
End If
If (MM_i <> LBound(MM_fields)) Then
MM_editQuery = MM_editQuery & ", "
End If
MM_editQuery = MM_editQuery & MM_columns(MM_i) & " = " & MM_formVal
Next
MM_editQuery = MM_editQuery & " where " & MM_editColumn & " = " &
MM_recordId

If (Not MM_abortEdit) Then
' execute the update
Set MM_editCmd = Server.CreateObject("ADODB.Command")
MM_editCmd.ActiveConnection = MM_editConnection
MM_editCmd.CommandText = MM_editQuery
MM_editCmd.Execute
MM_editCmd.ActiveConnection.Close
If (MM_editRedirectUrl <> "") Then
Response.Redirect(MM_editRedirectUrl)
End If
End If
End If
%>
<%
Dim film__MMColParam
film__MMColParam = "1"
If (Request.QueryString("Nmr") <> "") Then
film__MMColParam = Request.QueryString("Nmr")
End If
%>
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<title>Untitled Document</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>
<% if session("MM_Username") = empty then %>
<% response.Redirect "nlogin.asp" %>
<% ELSE %>
<% if session("posisi") <> "admin" then %>
```

```
<% response.Redirect "noadmin.asp" %>
<% ELSE %>
<%
Dim film
Dim film_numRows
Set film = Server.CreateObject("ADODB.Recordset")
film.ActiveConnection = MM_conn_mydatabase_STRING
film.Source = "SELECT * FROM filmdatabase WHERE Nmr = " +
Replace(film__MMColParam, "", "") + ""
film.CursorType = 0
film.CursorLocation = 2
film.LockType = 1
film.Open()
film_numRows = 0
%>
<body>
<form ACTION="<%=MM_editAction%>" METHOD="POST" name="form1">
  <table width="200" border="2">
    <tr>
      <th scope="row">JUDUL</th>
      <td><input name="judul" type="text" id="judul"
value="<%= (film.Fields.Item("Judul").Value)%>"></td>
    </tr>
    <tr>
      <th scope="row">LOKASI</th>
      <td><input name="lokasi" type="text" id="lokasi"
value="<%= (film.Fields.Item("lokasi").Value)%>"></td>
    </tr>
    <tr>
      <th scope="row">PHOTO</th>
      <td><input name="photo" type="text" id="photo"
value="<%= (film.Fields.Item("photo").Value)%>"></td>
    </tr>
    <tr>
      <th scope="row">DETAIL</th>
      <td><input name="detail" type="text" id="detail"
value="<%= (film.Fields.Item("detail").Value)%>"></td>
    </tr>
    <tr>
      <th scope="row"><input name="Update" type="submit" id="Update"
value="Update"></th>
      <td>&nbsp;</td>
    </tr>
  </table>
  <input type="hidden" name="MM_update" value="form1">
```



```
<input type="hidden" name="MM_recordId" value="<%=  
film.Fields.Item("Nmr").Value %>">  
</form>  
<%  
film.Close()  
Set film = Nothing  
>%>  
<% end if %>  
<% end if %>  
</body>  
</html>
```

Updateuser.asp

```
<% @LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>  
<!--#include file="Connections/conn_mydatabase.asp" -->  
<!-- #include file="home1.asp" -->  
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"  
"http://www.w3.org/TR/html4/loose.dtd">  
<html>  
<head>  
<title>Untitled Document</title>  
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">  
</head>  
<% if session("MM_Username") = empty then %>  
<% response.Redirect "nlogin.asp" %>  
<% ELSE %>  
<% if session("posisi") <> "admin" then %>  
<% response.Redirect "noadmin.asp" %>  
<% ELSE %>  
<%  
' *** Edit Operations: declare variables  
Dim MM_editAction  
Dim MM_abortEdit  
Dim MM_editQuery  
Dim MM_editCmd  
Dim MM_editConnection  
Dim MM_editTable  
Dim MM_editRedirectUrl  
Dim MM_editColumn  
Dim MM_recordId  
Dim MM_fieldsStr  
Dim MM_columnsStr  
Dim MM_fields  
Dim MM_columns  
Dim MM_typeArray
```

```
Dim MM_formVal
Dim MM_delim
Dim MM_altVal
Dim MM_emptyVal
Dim MM_i
MM_editAction = CStr(Request.ServerVariables("SCRIPT_NAME"))
If (Request.QueryString <> "") Then
    MM_editAction = MM_editAction & "?" &
Server.HTMLEncode(Request.QueryString)
End If
' boolean to abort record edit
MM_abortEdit = false
' query string to execute
MM_editQuery = ""
%>
<%
' *** Update Record: set variables
If (CStr(Request("MM_update")) = "Update" And CStr(Request("MM_recordId")) <>
"") Then
    MM_editConnection = MM_conn_mydatabase_STRING
    MM_editTable = "userdatabase"
    MM_editColumn = "Nama"
    MM_recordId = "" + Request.Form("MM_recordId") + ""
    MM_editRedirectUrl = "viewuser.asp"
    MM_fieldsStr =
"Nama|value|Password|value|Lokasi|value|Posisi|value|Credit|value|Photo|value"
    MM_columnsStr =
"Nama|,none,|Password|,none,|Lokasi|,none,|Posisi|,none,|Credit|none,none,NULL|P
hoto|,none,|"
    ' create the MM_fields and MM_columns arrays
    MM_fields = Split(MM_fieldsStr, "|")
    MM_columns = Split(MM_columnsStr, "|")
    ' set the form values
    For MM_i = LBound(MM_fields) To UBound(MM_fields) Step 2
        MM_fields(MM_i+1) = CStr(Request.Form(MM_fields(MM_i)))
    Next
    ' append the query string to the redirect URL
    If (MM_editRedirectUrl <> "" And Request.QueryString <> "") Then
        If (InStr(1, MM_editRedirectUrl, "?", vbTextCompare) = 0 And Request.QueryString
<> "") Then
            MM_editRedirectUrl = MM_editRedirectUrl & "?" & Request.QueryString
        Else
            MM_editRedirectUrl = MM_editRedirectUrl & "&" & Request.QueryString
        End If
    End If
End If
End If
```

```
%>
<%
' *** Update Record: construct a sql update statement and execute it
If (CStr(Request("MM_update")) <> "" And CStr(Request("MM_recordId")) <> "")
Then
' create the sql update statement
MM_editQuery = "update " & MM_editTable & " set "
For MM_i = LBound(MM_fields) To UBound(MM_fields) Step 2
MM_formVal = MM_fields(MM_i+1)
MM_typeArray = Split(MM_columns(MM_i+1),",")
MM_delim = MM_typeArray(0)
If (MM_delim = "none") Then MM_delim = ""
MM_altVal = MM_typeArray(1)
If (MM_altVal = "none") Then MM_altVal = ""
MM_emptyVal = MM_typeArray(2)
If (MM_emptyVal = "none") Then MM_emptyVal = ""
If (MM_formVal = "") Then
MM_formVal = MM_emptyVal
Else
If (MM_altVal <> "") Then
MM_formVal = MM_altVal
ElseIf (MM_delim = "") Then ' escape quotes
MM_formVal = "" & Replace(MM_formVal,"","") & ""
Else
MM_formVal = MM_delim + MM_formVal + MM_delim
End If
End If
If (MM_i <> LBound(MM_fields)) Then
MM_editQuery = MM_editQuery & ", "
End If
MM_editQuery = MM_editQuery & MM_columns(MM_i) & " = " & MM_formVal
Next
MM_editQuery = MM_editQuery & " where " & MM_editColumn & " = " &
MM_recordId
If (Not MM_abortEdit) Then
' execute the update
Set MM_editCmd = Server.CreateObject("ADODB.Command")
MM_editCmd.ActiveConnection = MM_editConnection
MM_editCmd.CommandText = MM_editQuery
MM_editCmd.Execute
MM_editCmd.ActiveConnection.Close
If (MM_editRedirectUrl <> "") Then
Response.Redirect(MM_editRedirectUrl)
End If
End If
End If
```

```
%>
<%
Dim rs_user__MMColParam
rs_user__MMColParam = "1"
If (Request.QueryString("Nama") <> "") Then
  rs_user__MMColParam = Request.QueryString("Nama")
End If
%>
<%
Dim rs_user
Dim rs_user_numRows
Set rs_user = Server.CreateObject("ADODB.Recordset")
rs_user.ActiveConnection = MM_conn_mydatabase_STRING
rs_user.Source = "SELECT * FROM userdatabase WHERE Nama = " +
Replace(rs_user__MMColParam, "", "") + ""
rs_user.CursorType = 0
rs_user.CursorLocation = 2
rs_user.LockType = 1
rs_user.Open()
rs_user_numRows = 0
%>
<body>
<form action="<%=MM_editAction%>" method="POST" name="Update"
id="Update">
  <table width="200" border="0">
    <tr>
      <th valign="top" scope="row">" width="120" height="160"></th>
      <td>
        <input name="Nama" type="text" id="Nama"
value="<%=rs_user.Fields.Item("Nama").Value%>" size="20">
        <input name="Password" type="text" id="Password"
value="<%=rs_user.Fields.Item("Password").Value%>" size="20">
        <input name="Lokasi" type="text" id="Lokasi"
value="<%=rs_user.Fields.Item("Lokasi").Value%>" size="20">
        <input name="Posisi" type="text" id="Posisi"
value="<%=rs_user.Fields.Item("Posisi").Value%>" size="20">
        <input name="Credit" type="text" id="Credit"
value="<%=rs_user.Fields.Item("Credit").Value%>" size="20">
        <input name="Photo" type="text" id="Photo"
value="<%=rs_user.Fields.Item("Photo").Value%>" size="20">
        <br>
        <input name="Update" type="submit" id="Update" value="Update"></td>
      </tr>
    </table>
    <input type="hidden" name="MM_update" value="Update">

```

```
<input type="hidden" name="MM_recordId" value="<%=  
rs_user.Fields.Item("Nama").Value %>">  
</form>  
<%  
rs_user.Close()  
Set rs_user = Nothing  
>  
<% end if %>  
<% end if %>  
</body>  
</html>
```

Video.asp

```
<% @LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>  
<!--#include file="Connections/conn_mydatabase.asp" -->  
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"  
"http://www.w3.org/TR/html4/loose.dtd">  
<html>  
<head>  
<title>Untitled Document</title>  
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">  
</head>  
<% if session("MM_Username") = empty then %>  
<% response.redirect "nologin.asp" %>  
<% ELSE %>  
<% if session("credit") <= 0 then %>  
<% response.Redirect"nocredit.asp" %>  
<% ELSE %>  
<%  
Dim film  
Dim film_numRows  
Set film = Server.CreateObject("ADODB.Recordset")  
film.ActiveConnection = MM_conn_mydatabase_STRING  
film.Source = "SELECT * FROM filmdatabase"  
film.CursorType = 0  
film.CursorLocation = 2  
film.LockType = 1  
film.Open()  
film_numRows = 0  
>  
<%  
Dim Repeat1__numRows  
Dim Repeat1__index  
Repeat1__numRows = -1
```

```
Repeat1__index = 0
film_numRows = film_numRows + Repeat1__numRows
%>
<%
Dim MM_paramName
%>
<%
' *** Go To Record and Move To Record: create strings for maintaining URL and Form
parameters
Dim MM_keepNone
Dim MM_keepURL
Dim MM_keepForm
Dim MM_keepBoth
Dim MM_removeList
Dim MM_item
Dim MM_nextItem
' create the list of parameters which should not be maintained
MM_removeList = "&index="
If (MM_paramName <> "") Then
    MM_removeList = MM_removeList & "&" & MM_paramName & "="
End If
MM_keepURL=""
MM_keepForm=""
MM_keepBoth=""
MM_keepNone=""
' add the URL parameters to the MM_keepURL string
For Each MM_item In Request.QueryString
    MM_nextItem = "&" & MM_item & "="
    If (InStr(1,MM_removeList,MM_nextItem,1) = 0) Then
        MM_keepURL = MM_keepURL & MM_nextItem &
Server.URLEncode(Request.QueryString(MM_item))
    End If
Next
' add the Form variables to the MM_keepForm string
For Each MM_item In Request.Form
    MM_nextItem = "&" & MM_item & "="
    If (InStr(1,MM_removeList,MM_nextItem,1) = 0) Then
        MM_keepForm = MM_keepForm & MM_nextItem &
Server.URLEncode(Request.Form(MM_item))
    End If
Next
' create the Form + URL string and remove the initial '&' from each of the strings
MM_keepBoth = MM_keepURL & MM_keepForm
If (MM_keepBoth <> "") Then
    MM_keepBoth = Right(MM_keepBoth, Len(MM_keepBoth) - 1)
End If
```

```
If (MM_keepURL <> "") Then
  MM_keepURL = Right(MM_keepURL, Len(MM_keepURL) - 1)
End If
If (MM_keepForm <> "") Then
  MM_keepForm = Right(MM_keepForm, Len(MM_keepForm) - 1)
End If
' a utility function used for adding additional parameters to these strings
Function MM_joinChar(firstItem)
  If (firstItem <> "") Then
    MM_joinChar = "&"
  Else
    MM_joinChar = ""
  End If
End Function
%>
<body>
  <p align="center"><font face="Monotype Corsiva"><b><font
size="5">SILAHKAN</font><font size="5"> PILIH LINK FILM DIBAWAH INI
</font></b></font></p>
  <p align="center"><font size="2"><b>
  <marquee bgcolor="#00BFFF" width="400">LINK FILM DIBAWAH INI DIAMBIL
DARI KOMPUTER SERVER SECARA STREAMING
  </marquee>
  </b></font></p>
  <p>&nbsp;</p>
  <table width="200" border="4" bordercolor="#9999CC">
    <tr>
      <th scope="col">.....JUDUL.....</th>
      <th
scope="col">.....DETAIL.....
.....</th>
    </tr>
  <%
  While ((Repeat1__numRows <> 0) AND (NOT film.EOF))
  %>
    <tr>
      <td><a href="detailfilmCLIENT.asp?<%= Server.HTMLEncode(MM_keepNone) &
MM_joinChar(MM_keepNone) & "Nmr=" & film.Fields.Item("Nmr").Value
%>"><%= (film.Fields.Item("Judul").Value)%></a></td>
      <td><%= (film.Fields.Item("detail").Value)%></td>
    </tr>
  <%
  Repeat1__index=Repeat1__index+1
  Repeat1__numRows=Repeat1__numRows-1
  film.MoveNext()
Wend
```

```
%>
</table>
<p>
  <%
film.Close()
Set film = Nothing
%>
  <% end if %>
  <% END IF %>
</p>
<p><a href="home.asp">BACK</a></p>
</body>
</html>
```

Viewfilm.asp

```
<% @LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!--#include file="Connections/conn_mydatabase.asp" -->
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<title>Untitled Document</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>
<% if session("MM_Username") = empty then %>
<% response.Redirect "nlogin.asp" %>
<% ELSE %>
<% if session("posisi") <> "admin" then %>
<% response.Redirect "nadmin.asp" %>
<% ELSE %>
<%
Dim film
Dim film_numRows
Set film = Server.CreateObject("ADODB.Recordset")
film.ActiveConnection = MM_conn_mydatabase_STRING
film.Source = "SELECT * FROM filmdatabase"
film.CursorType = 0
film.CursorLocation = 2
film.LockType = 1
film.Open()
film_numRows = 0
%>
<%
Dim Repeat1__numRows
```



```
Dim Repeat1__index
Repeat1__numRows = -1
Repeat1__index = 0
film_numRows = film_numRows + Repeat1__numRows
%>
<%
Dim MM_paramName
%>
<%
' *** Go To Record and Move To Record: create strings for maintaining URL and Form
parameters
Dim MM_keepNone
Dim MM_keepURL
Dim MM_keepForm
Dim MM_keepBoth
Dim MM_removeList
Dim MM_item
Dim MM_nextItem
' create the list of parameters which should not be maintained
MM_removeList = "&index="
If (MM_paramName <> "") Then
    MM_removeList = MM_removeList & "&" & MM_paramName & "="
End If
MM_keepURL=""
MM_keepForm=""
MM_keepBoth=""
MM_keepNone=""
' add the URL parameters to the MM_keepURL string
For Each MM_item In Request.QueryString
    MM_nextItem = "&" & MM_item & "="
    If (InStr(1,MM_removeList,MM_nextItem,1) = 0) Then
        MM_keepURL = MM_keepURL & MM_nextItem &
Server.URLEncode(Request.QueryString(MM_item))
    End If
Next
' add the Form variables to the MM_keepForm string
For Each MM_item In Request.Form
    MM_nextItem = "&" & MM_item & "="
    If (InStr(1,MM_removeList,MM_nextItem,1) = 0) Then
        MM_keepForm = MM_keepForm & MM_nextItem &
Server.URLEncode(Request.Form(MM_item))
    End If
Next
' create the Form + URL string and remove the initial '&' from each of the strings
MM_keepBoth = MM_keepURL & MM_keepForm
If (MM_keepBoth <> "") Then
```

```
MM_keepBoth = Right(MM_keepBoth, Len(MM_keepBoth) - 1)
End If
If (MM_keepURL <> "") Then
  MM_keepURL = Right(MM_keepURL, Len(MM_keepURL) - 1)
End If
If (MM_keepForm <> "") Then
  MM_keepForm = Right(MM_keepForm, Len(MM_keepForm) - 1)
End If
' a utility function used for adding additional parameters to these strings
Function MM_joinChar(firstItem)
  If (firstItem <> "") Then
    MM_joinChar = "&"
  Else
    MM_joinChar = ""
  End If
End Function
%>
<body>
<table width="200" border="4" bordercolor="#9999CC">
  <tr>
    <th scope="col">No</th>
    <th scope="col">.....JUDUL.....</th>
    <th scope="col">..PHOTO..</th>
    <th scope="col">..LOKASI..</th>
    <th
scope="col">.....DETAIL.....
..</th>
    <th scope="col">UPDATE</th>
  </tr>
  <%
While ((Repeat1__numRows <> 0) AND (NOT film.EOF))
%>
  <tr>
    <td><%= (film.Fields.Item("Nmr").Value) %></td>
    <td><A HREF="detailfilm.asp?<%= Server.HTMLEncode(MM_keepNone) &
MM_joinChar(MM_keepNone) & "Nmr=" & film.Fields.Item("Nmr").Value
%>"><%= (film.Fields.Item("Judul").Value) %></A></td>
    <td><%= (film.Fields.Item("photo").Value) %></td>
    <td><%= (film.Fields.Item("lokasi").Value) %></td>
    <td><%= (film.Fields.Item("detail").Value) %></td>
    <td><A HREF="Updatefilm.asp?<%= Server.HTMLEncode(MM_keepNone) &
MM_joinChar(MM_keepNone) & "Nmr=" & film.Fields.Item("Nmr").Value
%>">U</A></td>
  </tr>
  <%
Repeat1__index=Repeat1__index+1
```

```
Repeat1__numRows=Repeat1__numRows-1
film.MoveNext()
Wend
%>
</table>
<p>
  <%
film.Close()
Set film = Nothing
%>
  <% end if %>
  <% end if %>
</p>
<p><a href="web.ASP">BACK</a></p>
</body>
</html>
```

ViewUser.asp

```
<% @LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!--#include file="Connections/conn_mydatabase.asp" -->
<!-- #include file="home1.ASP" -->
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<title>Untitled Document</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>
<% if session("MM_Username") = empty then %>
<% response.Redirect "nlogin.asp" %>
<% ELSE %>
<% if session("posisi") <> "admin" then %>
<% response.Redirect "nadmin.asp" %>
<% ELSE %>
<%
Dim rs_user
Dim rs_user_numRows
Set rs_user = Server.CreateObject("ADODB.Recordset")
rs_user.ActiveConnection = MM_conn_mydatabase_STRING
rs_user.Source = "SELECT * FROM userdatabase"
rs_user.CursorType = 0
rs_user.CursorLocation = 2
rs_user.LockType = 1
```

```
rs_user.Open()
rs_user_numRows = 0
%>
<%
Dim Repeat1__numRows
Dim Repeat1__index
Repeat1__numRows = 10
Repeat1__index = 0
rs_user_numRows = rs_user_numRows + Repeat1__numRows
%>
<%
Dim MM_paramName
%>
<%
' *** Go To Record and Move To Record: create strings for maintaining URL and Form
parameters
Dim MM_keepNone
Dim MM_keepURL
Dim MM_keepForm
Dim MM_keepBoth
Dim MM_removeList
Dim MM_item
Dim MM_nextItem
' create the list of parameters which should not be maintained
MM_removeList = "&index="
If (MM_paramName <> "") Then
    MM_removeList = MM_removeList & "&" & MM_paramName & "="
End If
MM_keepURL=""
MM_keepForm=""
MM_keepBoth=""
MM_keepNone=""
' add the URL parameters to the MM_keepURL string
For Each MM_item In Request.QueryString
    MM_nextItem = "&" & MM_item & "="
    If (InStr(1,MM_removeList,MM_nextItem,1) = 0) Then
        MM_keepURL = MM_keepURL & MM_nextItem &
Server.URLEncode(Request.QueryString(MM_item))
    End If
Next
' add the Form variables to the MM_keepForm string
For Each MM_item In Request.Form
    MM_nextItem = "&" & MM_item & "="
    If (InStr(1,MM_removeList,MM_nextItem,1) = 0) Then
        MM_keepForm = MM_keepForm & MM_nextItem &
Server.URLEncode(Request.Form(MM_item))
    End If
Next
```

```
End If
Next
' create the Form + URL string and remove the initial '&' from each of the strings
MM_keepBoth = MM_keepURL & MM_keepForm
If (MM_keepBoth <> "") Then
  MM_keepBoth = Right(MM_keepBoth, Len(MM_keepBoth) - 1)
End If
If (MM_keepURL <> "") Then
  MM_keepURL = Right(MM_keepURL, Len(MM_keepURL) - 1)
End If
If (MM_keepForm <> "") Then
  MM_keepForm = Right(MM_keepForm, Len(MM_keepForm) - 1)
End If
' a utility function used for adding additional parameters to these strings
Function MM_joinChar(firstItem)
  If (firstItem <> "") Then
    MM_joinChar = "&"
  Else
    MM_joinChar = ""
  End If
End Function
%>
<body>
<table width="200" border="1">
  <tr>
    <th scope="col">FID</th>
    <th scope="col">Nama</th>
    <th scope="col">Password</th>
    <th scope="col">Lokasi</th>
    <th scope="col">Level</th>
    <th scope="col">Credit</th>
    <th scope="col">Photo</th>
    <th scope="col">Update</th>
    <th scope="col">Delete</th>
  </tr>
  <%
While ((Repeat1__numRows <> 0) AND (NOT rs_user.EOF))
%>
  <tr>
    <td><%=rs_user.Fields.Item("FID").Value%></td>
    <td><A HREF="detailuser.asp?<%= Server.HTMLEncode(MM_keepNone) &
MM_joinChar(MM_keepNone) & "Nama=" & rs_user.Fields.Item("Nama").Value
%>"><%=rs_user.Fields.Item("Nama").Value%></A></td>
    <td><%=rs_user.Fields.Item("Password").Value%></td>
    <td><%=rs_user.Fields.Item("Lokasi").Value%></td>
    <td><%=rs_user.Fields.Item("Posisi").Value%></td>
```

```
<td><%=rs_user.Fields.Item("Credit").Value)%></td>
<td><%=rs_user.Fields.Item("Photo").Value)%></td>
<td><a href="Updateuser.asp?<%= Server.HtmlEncode(MM_keepNone) &
MM_joinChar(MM_keepNone) & "Nama=" & rs_user.Fields.Item("Nama").Value
%>">U</a></td>
<td><A HREF="deleteuser.asp?<%= Server.HtmlEncode(MM_keepNone) &
MM_joinChar(MM_keepNone) & "Nama=" & rs_user.Fields.Item("Nama").Value
%>">D</A></td>
</tr>
<%
Repeat1__index=Repeat1__index+1
Repeat1__numRows=Repeat1__numRows-1
rs_user.MoveNext()
Wend
%>
</table>
<br>
<%
rs_user.Close()
Set rs_user = Nothing
%>
<% END IF %>
<% end if %>
</body>
</html>
```

Web.asp

```
<% @LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!-- #include file="home1.ASP" -->
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<title>Untitled Document</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>
<body>
<% if session("MM_Username") = empty then %>
<% response.redirect "nologin.asp" %>
<% ELSE %>
<% if session("posisi") <> "admin" then %>
<% response.Redirect"noadmin.asp" %>
<% ELSE %>
<table width="200" border="1">
<tr>
<td><a href="viewuser.asp">View User</a></td>
```


JIKA MENGGUNAKAN SISTEM **STREAMING MELALUI UNREAL MEDIA SERVER STREAMING**, MAKA UBAH SCRIPT **PLAYS.ASP** DAN **PLAYCLIENT.ASP** MENJADI :

PlayCLIENT.asp

```
<% @LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!--#include file="Connections/conn_mydatabase.asp" -->
<%
Dim FILM__MMColParam
FILM__MMColParam = "1"
If (Request.QueryString("Nmr") <> "") Then
    FILM__MMColParam = Request.QueryString("Nmr")
End If
%>
<%
Dim FILM
Dim FILM_numRows

Set FILM = Server.CreateObject("ADODB.Recordset")
FILM.ActiveConnection = MM_conn_mydatabase_STRING
FILM.Source = "SELECT * FROM filmdatabase WHERE Nmr = " +
Replace(FILM__MMColParam, "", "") + ""
FILM.CursorType = 0
FILM.CursorLocation = 2
FILM.LockType = 1
FILM.Open()

FILM_numRows = 0
%>
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<title>Untitled Document</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>
<% if session("MM_Username") = empty then %>
<p><b><font size="5">ANDA BELUM MELAKUKAN LOGIN! SILAHKAN LOGIN
TERLEBIH DAHULU.</font></b></p>

<% ELSE %>
<% if session("credit") <= 0 then %>
<p><b><font size="5">CREDIT ANDA TELAH HABIS. SILAHKAN REGISTRASI
ULANG.</font></b></p>
<% ELSE %>
```



```
<% session("credit") = session("credit") - 1 %>
<%
set koneksi =server.CreateObject("ADODB.connection")
koneksi.open "Mydatabase"
sql="UPDATE userdatabase SET credit=credit -1 where
Nama=" &Session("MM_Username")&""
set record=server.CreateObject("ADODB.recordset")
record.open sql,koneksi,3,3
%>

<head>

        <title>Unreal Media player control sample</title>
        <meta name="vs_targetSchema"
content="http://schemas.microsoft.com/intellisense/ie5">
        <script id="clientEventHandlersVB" language="vbscript">
<!--

.....
' Page event handlers
.....
sub OnLoad()
    UPlayer.UseTCP
    UPlayer.UseMediaServer "localhost:5119"
    UPlayer.UseFile "MediaRoot\\<%=FILM.Fields.Item("lokasi").Value%>"

    'UPlayer.UseLiveDirect "localhost", 1
    'UPlayer.UseLiveAlias "MyWebCam"

    'Uncomment the next lines to prohibit context menu and flow bar appearance
    'UPlayer.EnableContextMenu false
    'UPlayer.EnableFlowControl true, false

    UPlayer.Play
end sub

.....
' Player callbacks
.....
sub UPlayer_OnStart()

end sub

sub UPlayer_OnStop(PlaylistToBeCont)
```

```
        if PlaylistToBeCont = false then
            UPlayer_OnResize 320, 240
        end if
    end sub

sub UPlayer_OnResize(X, Y)
    UPlayer.Width = X
    UPlayer.Height = Y
end sub

!-->
        </script>
    </head>
    <body onload="OnLoad()">
        <P>
            <OBJECT id="UPlayer"
codeBase="http://www.umediaserver.net/bin/UMediaControl3.cab" height="240"
                width="320" data="data:application/x-
oleobject;base64,yBuidwXvgUCTv5KK6JCKJRAHAAATIQAzhgAAA=="
                classid="clsid:BE964208-66F0-48fb-8F53-
0C2BC35A610A" VIEWASTEXT>
            </OBJECT>
        </P>
        <p align="justify"><font size="5"><b><i>klik <a
href="DETAILFILM.ASP">link </a>ini untuk kembli ke menu</i></b></font></p>

    <%
FILM.Close()
Set FILM = Nothing
%>
<% END IF %>

<% END IF %>

<p><a href="home.asp">home</a></p>

<body>

</body>
</html>
```

Plays.asp

```
<% @LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>
<!--#include file="Connections/conn_mydatabase.asp" -->
<%
Dim FILM__MMColParam
FILM__MMColParam = "1"
If (Request.QueryString("Nmr") <> "") Then
    FILM__MMColParam = Request.QueryString("Nmr")
End If
%>
<%
Dim FILM
Dim FILM_numRows

Set FILM = Server.CreateObject("ADODB.Recordset")
FILM.ActiveConnection = MM_conn_mydatabase_STRING
FILM.Source = "SELECT * FROM filmdatabase WHERE Nmr = " +
Replace(FILM__MMColParam, "'", "''") + ""
FILM.CursorType = 0
FILM.CursorLocation = 2
FILM.LockType = 1
FILM.Open()

FILM_numRows = 0
%>

<title>Untitled Document</title>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">
</head>
<% if session("MM_Username") = empty then %>
<% response.Redirect "nologin.asp" %>
<% ELSE %>
<% if session("posisi") <> "admin" then %>
<% response.Redirect "noadmin.asp" %>
<% ELSE %>
<head>
<meta name="GENERATOR" content="Microsoft FrontPage 5.0">
<meta name="ProgId" content="FrontPage.Editor.Document">
<meta http-equiv="Content-Type" content="text/html; charset=windows-1252">
<title>New Page 1</title>

    <head>
        <title>Unreal Media player control sample</title>
        <meta name="vs_targetSchema"
content="http://schemas.microsoft.com/intellisense/ie5">
```

```

                <script id="clientEventHandlersVB" language="vbscript">
<!--
.....
' Page event handlers
.....
sub OnLoad()
    UPlayer.UseTCP
    UPlayer.UseMediaServer "jhonny:5119"
    UPlayer.UseFile "MediaRoot\\<%= (FILM.Fields.Item("lokasi").Value)%>"

    'UPlayer.UseLiveDirect "localhost", 1
    'UPlayer.UseLiveAlias "MyWebCam"

    'Uncomment the next lines to prohibit context menu and flow bar appearance
    'UPlayer.EnableContextMenu false
    'UPlayer.EnableFlowControl true, false

    UPlayer.Play
end sub

.....
' Player callbacks
.....
sub UPlayer_OnStart()

end sub

sub UPlayer_OnStop(PlaylistToBeCont)
    if PlaylistToBeCont = false then
        UPlayer_OnResize 320, 240
    end if
end sub

sub UPlayer_OnResize(X, Y)
    UPlayer.Width = X
    UPlayer.Height = Y
end sub

//-->
                </script>
            </head>
            <body onload="OnLoad()">
                <P>
                    <OBJECT id="UPlayer"
codeBase="http://www.umediaserver.net/bin/UMediaControl3.cab" height="240"

```

```
width="320" data="data:application/x-
oleobject;base64,yBuidwXvgUCTv5KK6JCKJRAHAAATIQAzhgAAA=="
classid="clsid:BE964208-66F0-48fb-8F53-
0C2BC35A610A" VIEWASTEXT>
</OBJECT>

<body vlink="#00FFFF">

<p align="center">
</p>
<p align="justify"><font size="5"><b><i>klik <a href="viewfilm.ASP">link </a>ini
untuk kembali ke menu</i></b></font></p>

<% END IF %>
<% END IF %>
<body>

</body>
</html>
<%
FILM.Close()
Set FILM = Nothing
%>
```

Lampiran 3. Error dan Solusi

Didalam menggunakan ASP, kita akan sering mengalami error-error tertentu. Sebagian besar error ini terjadi karena settingan computer atau spesifikasi computer (baik dalam bentuk hardware atau software) kurang mendukung. Dibawah ini adalah list error-error yang sering terjadi.


- Sintak Error :

Error Type:
Microsoft OLE DB Provider for ODBC Drivers (0x80004005)
[Microsoft][ODBC Microsoft Access Driver] operation must use an updateable query.

- Solusi Error :


Error ini terjadi, karena setingan default dari computer Anda adalah tidak memperbolehkan adanya write. Solusinya cukup mudah, pertama-tama masuk ke directory yang berisi database, dalam hal ini direktori **HOM**, dan juga Database bernama **Mydatabase**. Ubah setingan securitynya, dengan cara :

1. klik kanan pada **HOM**.
2. pilih **property** -> **security** -> **advanced** -> **permission**
3. kemudian Uncheck : Allow inherit permission from parent to propagate to this object

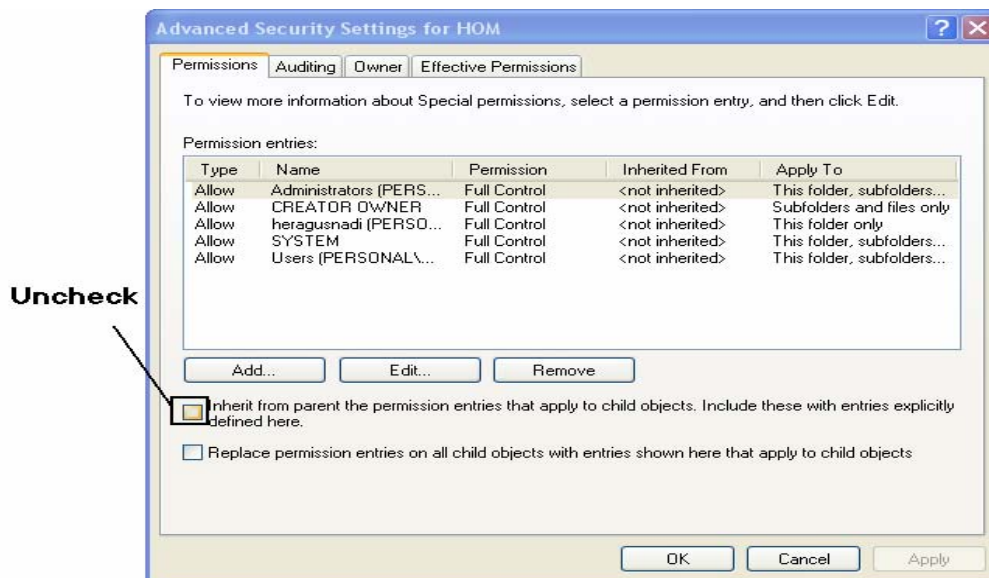

Gambar L3.1 point 3

4. klik **OK** kembali lagi ke **property**, pilih computer yang ingin diberi kekuasaan (jika dalam LAN, seharusnya **IUSR** (Internet guest Account) kemudian check **write** atau **allow full control**.

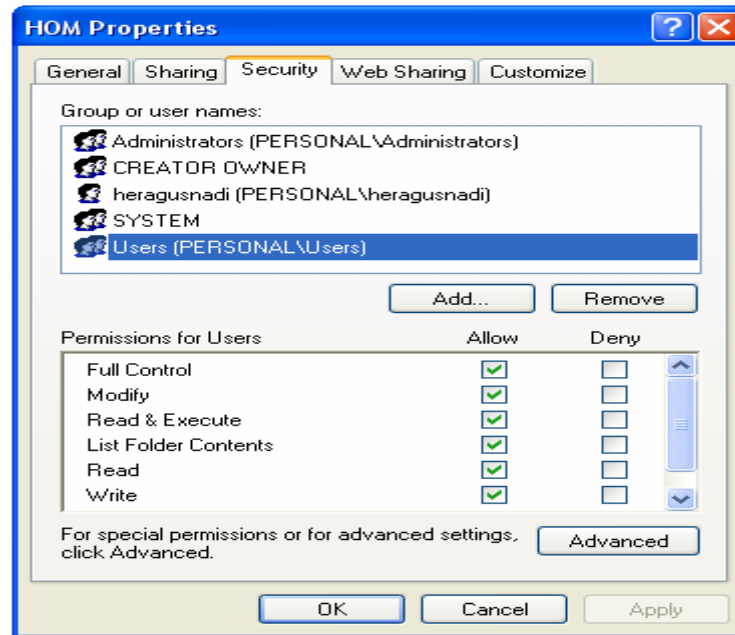


Gambar L3.2 point 4

5. Lakukan hal yang sama untuk user yang lain.

IMPORTANT : JANGAN lakukan point 3 pada Mydatabase.

KHUSUS untuk Windows XP Pro , matikan **simple file sharing** yang ada di **folder option** pada **control panel**.

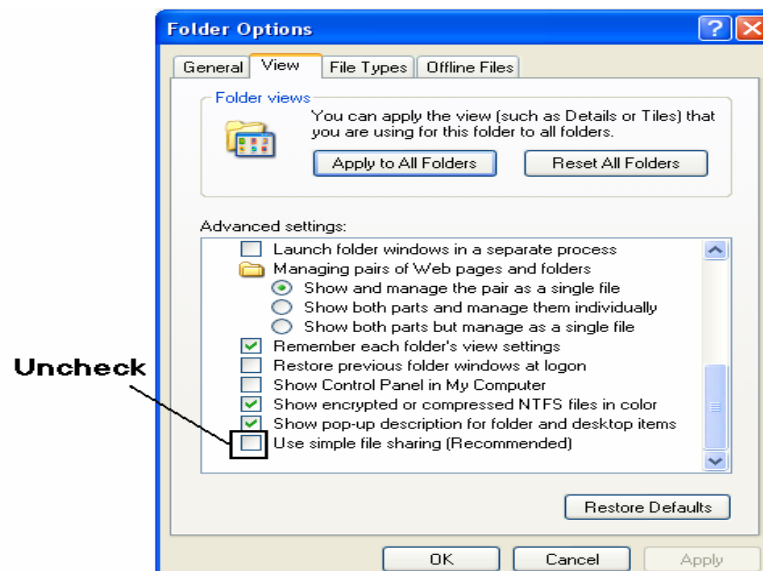

Gambar L3.3 simple file sharing

- Sintak Error :

Error Type:
Microsoft OLE DB Provider for ODBC Drivers (0x80004005)
[Microsoft][ODBC Microsoft Access Driver] Data source name not found and no default driver specified.

- Solusi Error :

Error ini terjadi karena Anda belum menseting **DSN**. Karena dalam program ini, didesain menggunakan system DSN, bukan DSN-less, sehingga yang harus dilakukan hanya menseting DSN terlebih dahulu. Langkah-langkah dalam menset DSN terdapat di **Bab 3 Perancangan**.

- Sintak Error :

Error Type:
Object not found

Atau sebagian besar berbentuk gambar :



Gambar L3.4 tampilan error

- Solusi Error :

Error ini terjadi tak lain, Karena Anda belum menginstal **Windows Media Player** (jika melakukan streaming melalui **internal IIS**) atau belum menginstal **Unreal Streaming Media Player** (jika melakukan streaming melalui **sreaming media server**) atau di komputer yang akan menjalankan film (computer clien dan server). Cara menginstal terdapat di **Bab 3 Perancangan**.


- Sintak Error :

Error Type:
File not found on the server

- Solusi Error :

Error ini dikarenakan Anda belum memasukkan file film ke dalam **Unreal Media Server**. Langkah-langkah memasukkan file film ke Unreal Media Server adalah :

1. Buka C (atau drive yang dulu anda Instal program Unreal Media Server) : Program Files -> Unreal Streaming -> U Media Server -> Media Root.
2. Masukkan File Film ke dalam folder MediaRoot.
3. selesai.

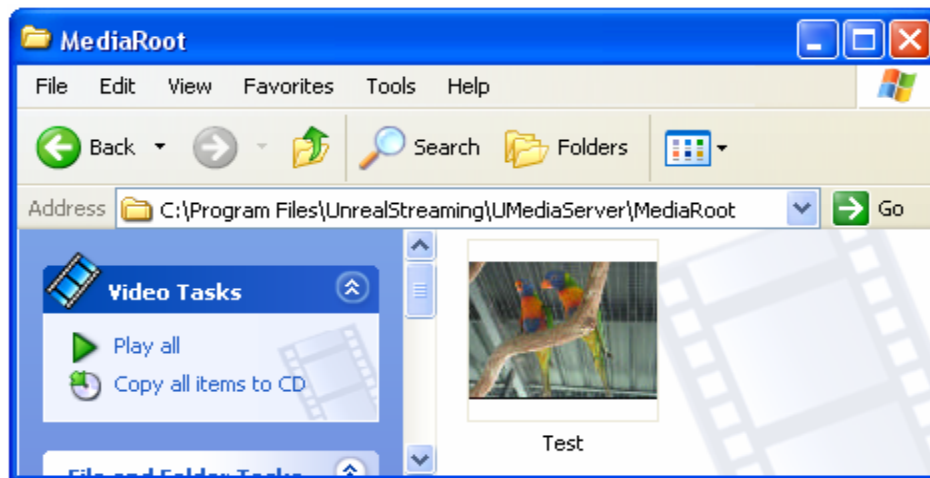

Gambar L3.5 Lokasi MediaRoot

- Sintak Error :

Error Type:
Can not resolve Media server IP Address

- Solusi Error :

Error ini terjadi karena Anda belum mengubah alamat dari **Plays.asp** dan **PlayClient.asp**. Solusinya adalah mengubah script Plays.asp dan PlayClient.asp yang berisi **Localhost** menjadi **Nama computer server**.

1. UPlayer.UseMediaServer "localhost:5119"
MENJADI
UPlayer.UseMediaServer "nama computer:5119"

2. `<param name="Filename" valuetype="ref"
value="HTTP://LOCALHOST/hom/film/<%=FILM.Fields.Item("lokasi").Value
%>">`

MENJADI

`<param name="Filename" valuetype="ref"
value = "HTTP://Nama komputer server/hom/film/<%=FILM.Fields.Item("lokasi").Value
%>">`

- Sintak Error :

Response object error'ASP 0156 : 80004005'
Header Error
The HTTP header are already written to the client browser. Any HTTP header modifications must be made before writing page content.

- Solusi Error :

Error ini terjadi karena untuk iesp1 tertentu, defaultnya adalah tanpa buffering data. Untuk itu, cukup masukkan sintak berikut : `<% response.buffer = true %>` Dibawah sintaks `<% @LANGUAGE="VBSCRIPT" CODEPAGE="1252"%>`.